


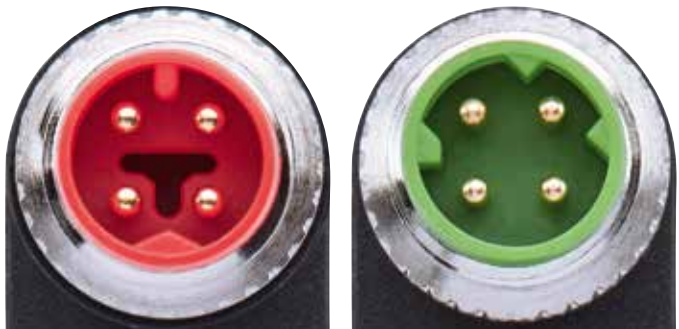
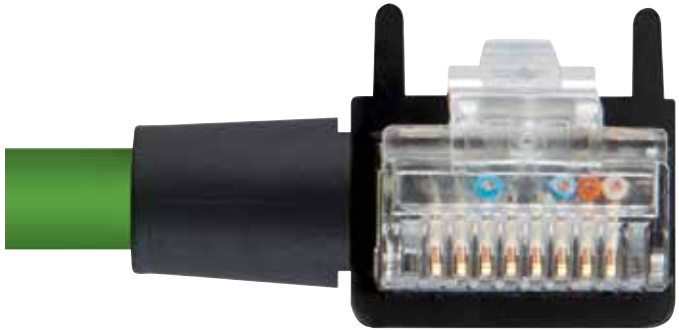



escha.net

**ESCHA**

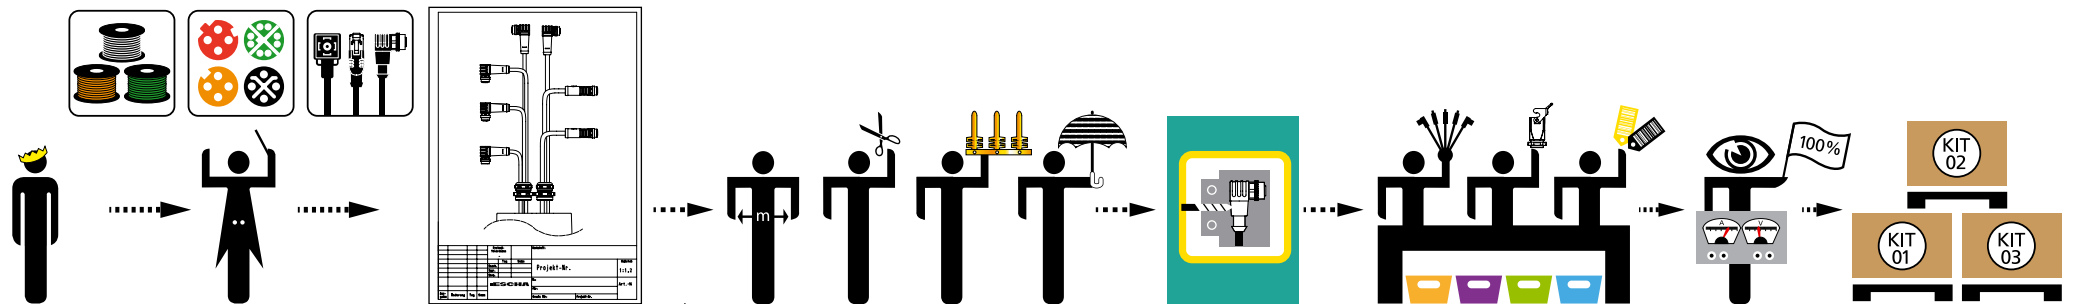

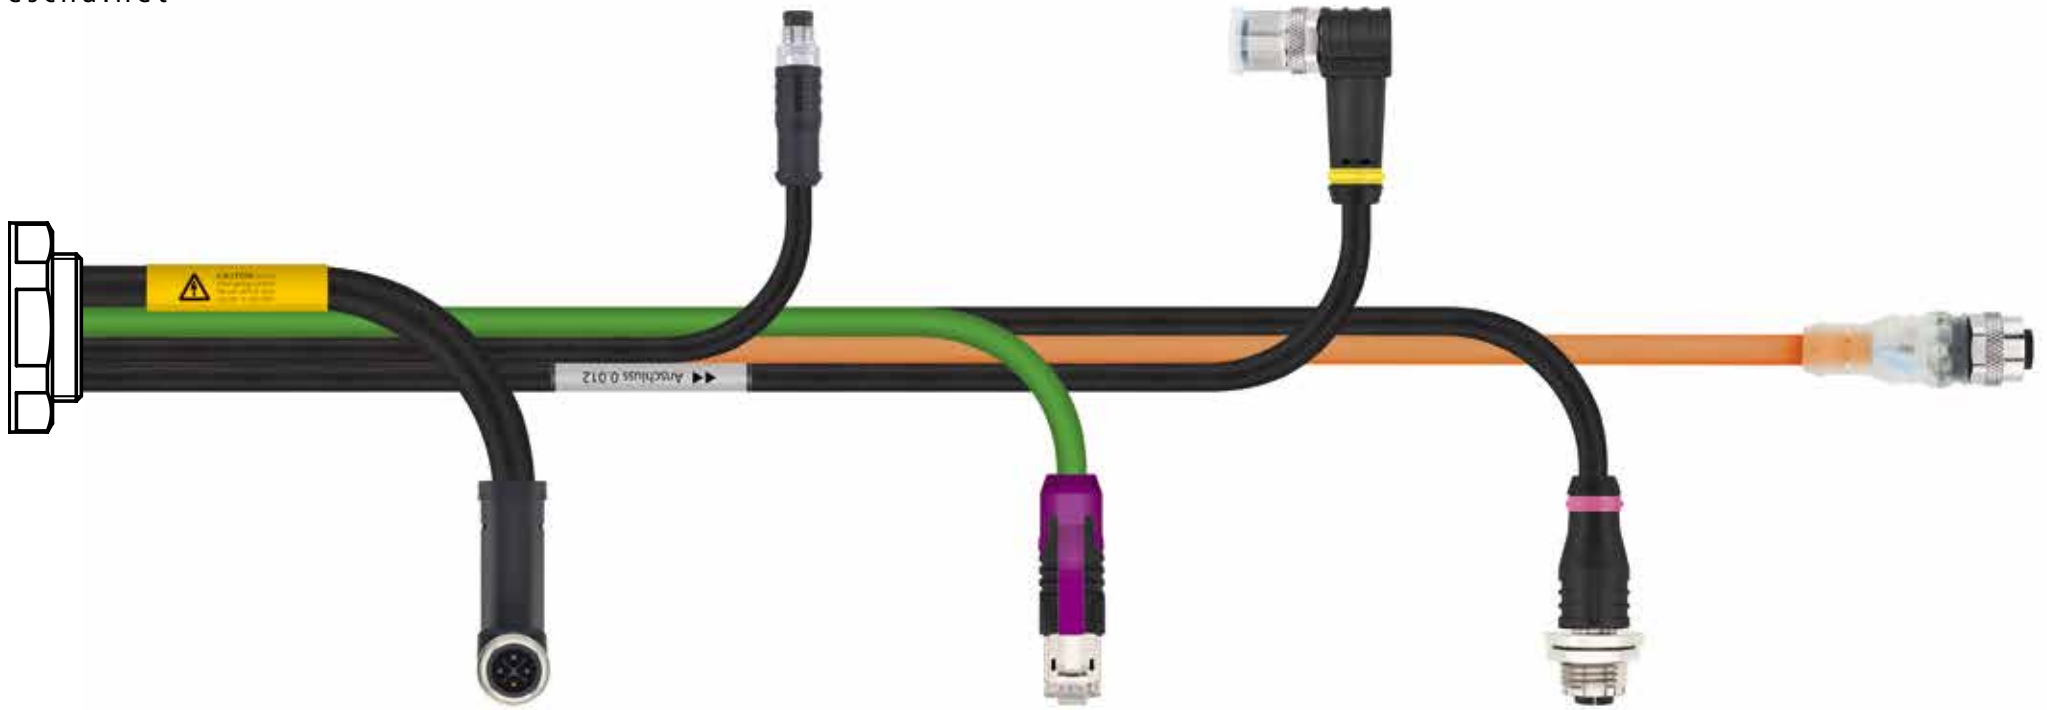

### Connectivity for Industry 4.0

This catalog shows connectivity that provides complete system-wiring for various applications. Convince yourself of a comprehensive M8- and M12-portfolio which offers qualitatively high-grade and industry-proven connectivity-solutions for sensor-/actuator-cabling, power-supply, and data-transmission.

Especially in the field of Industrial-Ethernet-connectors you will find numerous product-novelties. These were designed according to high-frequency-aspects and provide huge reserves for a fast and reliable data-transmission for the demands of tomorrow.


In addition, discover the possibilities of our eCatalog. Visit [escha.net](http://escha.net), download the catalog, and be directly redirected to the detail information by clicking on the item number. Besides this, we provide our catalog in a fast and simple way by offering the widespread BMEcat format. ESCHA data is available in the eCl@ss and ETIM standardized classification system.

Do not hesitate to contact us in case the requested product for your application is not included in this catalog. When it comes to customer-specific modifications or even individual developments, ESCHA is just the right partner for you!

AL	Sensor/Actuator	4
FB	Food & Beverage	52
HT	High temperature-proof	58
	Panel connectors   Receptacles	62
	Field-wireable connectors	82
IE	Industrial Ethernet	88
	RJ45 patch cords	104
PB	Profibus	110
CD	CANopen/DeviceNet	116
P	M12x1 POWER	120
	T-splitters   Y-splitters	132
	Y-splitters with cable outlet	140
IO	I/O-junctions   passive	148
IO	I/O-junctions   active	152
	M23	156
V	Valve connectors	160
	Accessories	168
	Cable qualities	178
	100m cable	182
	Technical Information	186
	Pinout	192




Nomenclature of patched connectors

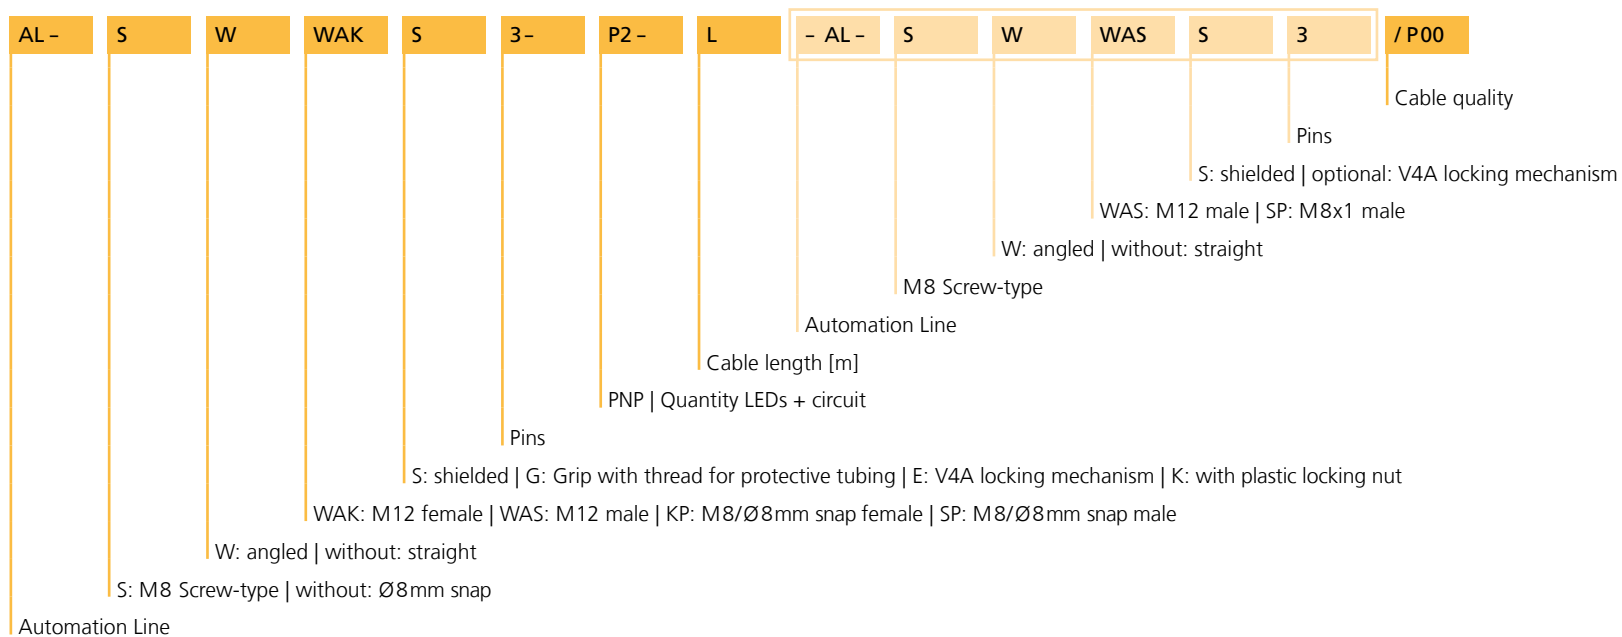

\*not for P00

Cable	Material	UL	Colour	Feature	drag chain-adapted	torsion resistant	welding sparks resistant
P00	PVC/PVC		GY				
P01	PVC/PVC	✓	GY				
P01BK	PVC/PVC	✓	BK				
S370	PUR/PP	✓	BK		✓	✓	✓
S370GY	PUR/PP	✓	GY		✓	✓	✓
S7400	PUR/PP	✓	OG	robotic, for high mechanical stresses	✓	✓	✓
S400	PUR/PP	✓	BK	easystrip, manual cable stripping up to 1.5m	✓	✓	✓
S570	PUR/PP	✓	BK	Wire cross-section 3x0.14mm <sup>2</sup> + 2x0.34mm <sup>2</sup>	✓	✓	✓

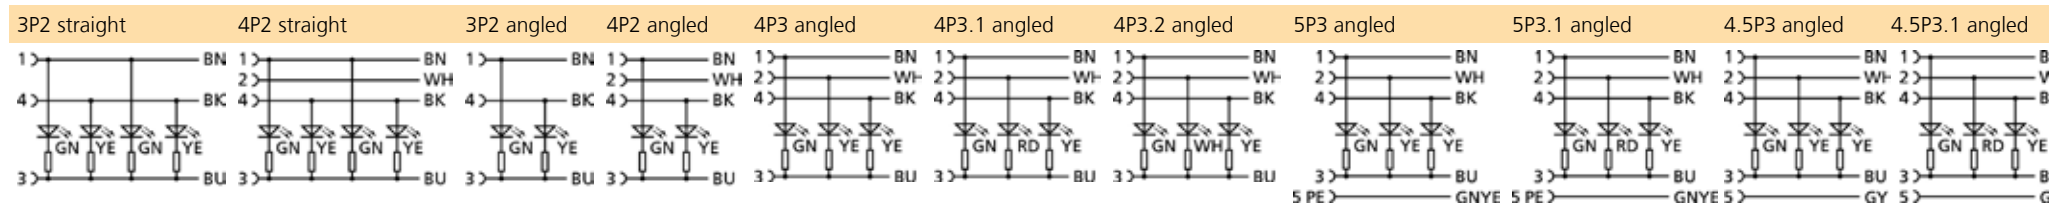



\*see flyer "M12 with plastic locking nut"


<b>M12</b>	Single-ended cordset	6
	Double-ended cordset	15
	Single-ended cordset, shielded	21
	Double-ended cordset, shielded	25
<b>M8</b>	Single-ended cordset	29
	Double-ended cordset	32
	Single-ended cordset, shielded	34
	Double-ended cordset, shielded	35
<b>Ø8mm snap</b>	Single-ended cordset	37
	Double-ended cordset	40
<b>Receptacles</b>	M12	42
	M8	50

## Sensor/Actuator




Technical data	M12	M8	Ø8mm snap	Receptacle
Insulation resistance	≥10 <sup>8</sup> Ω	≥10 <sup>8</sup> Ω	≥10 <sup>8</sup> Ω	≥10 <sup>8</sup> Ω
Resistance	≤ 5mΩ	≤ 5mΩ	≤ 5mΩ	≤ 5mΩ
Ambient temperature product	-30°C...+90°C	-30°C...+90°C	-30°C...+90°C	-30°C...+90°C
Contact material	Metal, gold-plated	Metal, gold-plated	Metal, gold-plated	Metal, gold-plated
Contact-carrier material	Plastic, TPU	Plastic, TPU	Plastic, TPU	Plastic
Grip body material	Plastic, TPU	Plastic, TPU	Plastic, TPU	Plastic
Coupling nut material	Metal, nickel-plated	Metal, nickel-plated		
Sealing (female) material	FPM/FKM	FPM/FKM	FPM/FKM	FPM/FKM
Standards	IEC 61076-2-101	IEC 61076-2-104	IEC 61076-2-104	IEC 61076-2-101/-109
Degree of protection (mounted)	IP65, IP67, IP68	IP65, IP67, IP68	IP65, IP67, IP68	IP65, IP67, IP68
Mechanical life-cycle	>100 mating cycles	>100 mating cycles	>100 mating cycles	>100 mating cycles
Degree of pollution	3	3/2	3/2	3

Our sensor/actuator connectors meet the typical requirements of automation industry: halogen-, PVC-, and silicone-free; drag-chain adapted; weld-field immune; chemicals-, oil-, microbes-, and hydrolysis resistant. Furthermore tight according to IP67 as well as UL-approved. A comprehensive portfolio with: LED-versions; threaded grip for protective tubing; 360°-shielding through patented ESCHA 2SSK-technology. Available with three cable qualities: PVC, PUR, and PURrobotic with higher drag-chain adaption and torsion resistance.


Upon request, you can order our M12 connectors with temperature- and media resistant plastic locking nuts. These are available in different colors and thus facilitate the slot allocation.

	Body				Cable			Item description	L = cable length*		
	Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
 Single-ended cordset female, straight, M12	3	250V	4A		PUR	BK		AL-WAK3-L/S370	8043798	8043799	8043800
			4A		PUR	BK		AL-WAK3-L/S400	8075472	8075473	8075474
			4A		PUR	GY		AL-WAK3-L/S370GY	8058853	8058854	8058855
			4A		PUR	OG		AL-WAK3-L/S7400	8058862	8058863	8058864
			4A		PVC	BK		AL-WAK3-L/P01BK	8081847	8081848	8081849
			4A		PVC	GY		AL-WAK3-L/P00	8051043	8051044	8051045
			4A		PVC	GY		AL-WAK3-L/P01	8051250	8051251	8051252
	4	250V	4A		PUR	BK		AL-WAK4-L/S370	8043811	8043812	8043813
			4A		PUR	BK		AL-WAK4-L/S400	8075490	8075491	8075492
			4A		PUR	GY		AL-WAK4-L/S370GY	8058856	8058857	8058858
			4A		PUR	OG		AL-WAK4-L/S7400	8058865	8058866	8058867
			4A		PVC	BK		AL-WAK4-L/P01BK	8081859	8081860	8081861
			4A		PVC	GY		AL-WAK4-L/P00	8049341	8051055	8051056
			4A		PVC	GY		AL-WAK4-L/P01	8051262	8051263	8051264
	4+PE	60V	4A		PUR	BK		AL-WAK5-L/S370	8045034	8045035	8046043
			4A		PUR	BK		AL-WAK5-L/S400	8075529	8075530	8075531
			4A		PUR	GY		AL-WAK5-L/S370GY	8058859	8058860	8058861
			4A		PUR	OG		AL-WAK5-L/S7400	8058868	8058869	8058870
			4A		PVC	BK		AL-WAK5-L/P01BK	8081871	8081872	8081873
			4A		PVC	GY		AL-WAK5-L/P00	8051077	8051078	8051079
			4A		PVC	GY		AL-WAK5-L/P01	8051286	8051287	8051288
5	60V	4A		PUR	BK		AL-WAK4.5-L/S370	8043823	8043824	8043825	
		4A		PUR	BK		AL-WAK4.5-L/S400	8075638	8075639	8075640	
		4A		PUR	GY		AL-WAK4.5-L/S370GY	8092295	8092296	8092297	
		4A		PUR	OG		AL-WAK4.5-L/S7400	8084858	8085288	8085289	
		4A		PVC	GY		AL-WAK4.5-L/P00	8051067	8051068	8051069	
		4A		PVC	GY		AL-WAK4.5-L/P01	8051274	8051275	8051276	
8	30V	2A		PUR	BK		AL-WAK8-L/S370	8046903	8046904	8046905	
		2A		PUR	BK		AL-WAK8-L/S400	8075556	8075557	8075558	
		2A		PUR	GY		AL-WAK8-L/S370GY	8092331	8092332	8092333	
		2A		PVC	GY		AL-WAK8-L/P00	8051089	8051090	8051091	
		2A		PVC	GY		AL-WAK8-L/P01	8051298	8051299	8051300	

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.



		Body				Cable			Item description	L = cable length*		
		Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
	Single-ended cordset female, straight, M12	12	30V	1.5A		PUR	BK		AL-WAK12-L/S370	8046918	8046920	8046921
				1.5A		PUR	BK		AL-WAK12-L/S400	8075568	8075569	8075570
				1.5A		PUR	GY		AL-WAK12-L/S370GY	8092357	8092358	8092359
				1.5A		PVC	GY		AL-WAK12-L/P00	8051101	8051102	8051103
				1.5A		PVC	GY		AL-WAK12-L/P01	8051310	8051311	8051312
	Single-ended cordset female, straight, M12, with LED	3	30V	4A	3P2	PUR	BK		AL-WAK3P2-L/S370	8044524	8045592	8047386
				4A	3P2	PUR	BK		AL-WAK3P2-L/S400	8075475	8075476	8075477
				4A	3P2	PUR	GY		AL-WAK3P2-L/S370GY	8058922	8058923	8058924
				4A	3P2	PUR	OG		AL-WAK3P2-L/S7400	8058928	8058929	8058930
				4A	3P2	PVC	BK		AL-WAK3P2-L/P01BK	8082022	8082023	8082024
				4A	3P2	PVC	GY		AL-WAK3P2-L/P00	8052508	8052509	8052510
				4A	3P2	PVC	GY		AL-WAK3P2-L/P01	8052511	8052512	8052513
		4	30V	4A	4P2	PUR	BK		AL-WAK4P2-L/S370	8048938	8048114	8048116
				4A	4P2	PUR	BK		AL-WAK4P2-L/S400	8075493	8075494	8075495
				4A	4P2	PUR	GY		AL-WAK4P2-L/S370GY	8058925	8058926	8058927
				4A	4P2	PUR	OG		AL-WAK4P2-L/S7400	8058931	8058932	8058933
				4A	4P2	PVC	BK		AL-WAK4P2-L/P01BK	8082025	8082026	8082027
				4A	4P2	PVC	GY		AL-WAK4P2-L/P00	8052514	8052515	8052516
	Single-ended cordset female, straight, M12, grip body with thread	4	250V	4A		PUR	BK		AL-WAKG4-L/S370	8052820	8052821	8052822
				4A		PUR	BK		AL-WAKG4-L/S400	8075496	8075497	8075498
				4A		PUR	GY		AL-WAKG4-L/S370GY	8059086	8059087	8059088
				4A		PUR	OG		AL-WAKG4-L/S7400	8059089	8059090	8059091
				4A		PVC	BK		AL-WAKG4-L/P01BK	8082551	8082552	8082553
				4A		PVC	GY		AL-WAKG4-L/P00	8052823	8052824	8052825
				4A		PVC	GY		AL-WAKG4-L/P01	8052826	8052827	8052828

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.



	Body				Cable			Item description	L = cable length*		
	Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
 Single-ended cordset female, angled, M12	3	250V	4A	PUR	BK		AL-WWAK3-L/S370	8043801	8043802	8043803	
			4A	PUR	BK		AL-WWAK3-L/S400	8075481	8075482	8075483	
			4A	PUR	GY		AL-WWAK3-L/S370GY	8058871	8058872	8058873	
			4A	PUR	OG		AL-WWAK3-L/S7400	8058880	8058881	8058882	
			4A	PVC	BK		AL-WWAK3-L/P01BK	8081850	8081851	8081852	
			4A	PVC	GY		AL-WWAK3-L/P00	8051046	8051047	8051048	
			4A	PVC	GY		AL-WWAK3-L/P01	8051253	8051254	8051255	
	4	250V	4A	PVC	BK		AL-WWAK4-L/P01BK	8081862	8081863	8081864	
			4A	PUR	BK		AL-WWAK4-L/S370	8043814	8043815	8043816	
			4A	PUR	BK		AL-WWAK4-L/S400	8075505	8075506	8075507	
			4A	PUR	GY		AL-WWAK4-L/S370GY	8058874	8058875	8058876	
			4A	PUR	OG		AL-WWAK4-L/S7400	8058883	8058884	8058885	
			4A	PVC	GY		AL-WWAK4-L/P00	8049342	8049343	8051057	
			4A	PVC	GY		AL-WWAK4-L/P01	8051265	8051266	8051267	
	4+PE	60V	4A	PUR	BK		AL-WWAK5-L/S370	8046021	8046022	8046023	
			4A	PUR	BK		AL-WWAK5-L/S400	8075535	8075536	8075537	
			4A	PUR	GY		AL-WWAK5-L/S370GY	8058877	8058878	8058879	
			4A	PUR	OG		AL-WWAK5-L/S7400	8058886	8058887	8058888	
			4A	PVC	BK		AL-WWAK5-L/P01BK	8081874	8081875	8081876	
			4A	PVC	GY		AL-WWAK5-L/P00	8051080	8051081	8051082	
			4A	PVC	GY		AL-WWAK5-L/P01	8051289	8051290	8051291	
5	60V	4A	PUR	BK		AL-WWAK4.5-L/S370	8043826	8043827	8043828		
		4A	PUR	BK		AL-WWAK4.5-L/S400	8075550	8075551	8075552		
		4A	PUR	GY		AL-WWAK4.5-L/S370GY	8091079	8092301	8092304		
		4A	PUR	OG		AL-WWAK4.5-L/S7400	8084859	8085290	8085291		
		4A	PVC	GY		AL-WWAK4.5-L/P00	8049344	8051070	8051071		
		4A	PVC	GY		AL-WWAK4.5-L/P01	8051277	8051278	8051279		
8	30V	2A	PUR	BK		AL-WWAK8-L/S370	8046906	8046907	8046908		
		2A	PUR	BK		AL-WWAK8-L/S400	8075562	8075563	8075564		
		2A	PUR	GY		AL-WWAK8-L/S370GY	8092337	8092338	8092339		
		2A	PVC	GY		AL-WWAK8-L/P00	8051092	8051093	8051094		
		2A	PVC	GY		AL-WWAK8-L/P01	8051301	8051302	8051303		

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.




		Body				Cable				L = cable length*				
		Pins	U[max]	I[max]	LED	Material	Color	UL	Item description	2m / 1m	5m / 2m	10m / 5m		
	Single-ended cordset female, angled, M12	12	30V	1.5A		PUR	BK		AL-WWAK12-L/S370	8046923	8046924	8046925		
				1.5A		PUR	BK		AL-WWAK12-L/S400	8075574	8075575	8075576		
				1.5A		PUR	GY		AL-WWAK12-L/S370GY	8092364	8092365	8092366		
				1.5A		PVC	GY		AL-WWAK12-L/P00	8051104	8051105	8051106		
				1.5A		PVC	GY		AL-WWAK12-L/P01	8051313	8051314	8051315		
	Single-ended cordset female, angled, M12, with LED	3	30V	4A	3P2	PUR	BK		AL-WWAK3P2-L/S370	8044219	8045217	8044523		
				4A	3P2	PUR	BK		AL-WWAK3P2-L/S400	8075484	8075485	8075486		
				4A	3P2	PUR	GY		AL-WWAK3P2-L/S370GY	8059930	8059931	8059932		
				4A	3P2	PUR	OG		AL-WWAK3P2-L/S7400	8058934	8058935	8058936		
				4A	3P2	PVC	BK		AL-WWAK3P2-L/P01BK	8081889	8081890	8081891		
				4A	3P2	PVC	GY		AL-WWAK3P2-L/P00	8051121	8051119	8051120		
				4A	3P2	PVC	GY		AL-WWAK3P2-L/P01	8051328	8051329	8051330		
				4	30V	4A	4P2	PUR	BK		AL-WWAK4P2-L/S370	8045237	8045238	8045239
						4A	4P2	PUR	BK		AL-WWAK4P2-L/S400	8075508	8075509	8075510
						4A	4P2	PUR	GY		AL-WWAK4P2-L/S370GY	8059933	8059934	8059935
						4A	4P2	PUR	OG		AL-WWAK4P2-L/S7400	8058937	8058938	8058939
						4A	4P2	PVC	BK		AL-WWAK4P2-L/P01BK	8081892	8081893	8081894
						4A	4P2	PVC	GY		AL-WWAK4P2-L/P00	8051122	8051123	8051124
						4A	4P2	PVC	GY		AL-WWAK4P2-L/P01	8051331	8051332	8051333
		4A	4P3			PUR	BK		AL-WWAK4P3-L/S370	8044220	8044565	8044566		
		4A	4P3			PUR	BK		AL-WWAK4P3-L/S400	8075511	8075512	8075513		
		4A	4P3			PUR	GY		AL-WWAK4P3-L/S370GY	8059936	8059937	8059938		
		4A	4P3			PUR	OG		AL-WWAK4P3-L/S7400	8058940	8058941	8058942		
		4A	4P3			PVC	BK		AL-WWAK4P3-L/P01BK	8081895	8081896	8081897		
		4A	4P3			PVC	GY		AL-WWAK4P3-L/P00	8051125	8051126	8051127		
		4A	4P3			PVC	GY		AL-WWAK4P3-L/P01	8051334	8051335	8051336		
		4A	4P3.1	PUR	BK		AL-WWAK4P3.1-L/S370	8045911	8045912	8045913				
		4A	4P3.1	PUR	BK		AL-WWAK4P3.1-L/S400	8075514	8075515	8075516				
		4A	4P3.1	PUR	GY		AL-WWAK4P3.1-L/S370GY	8059939	8059940	8059941				
		4A	4P3.1	PUR	OG		AL-WWAK4P3.1-L/S7400	8058943	8058944	8058945				
		4A	4P3.1	PVC	BK		AL-WWAK4P3.1-L/P01BK	8081898	8081899	8081900				
		4A	4P3.1	PVC	GY		AL-WWAK4P3.1-L/P00	8051128	8051129	8051130				
		4A	4P3.1	PVC	GY		AL-WWAK4P3.1-L/P01	8051337	8051338	8051339				



\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

	Body				Cable			Item description	L = cable length*		
	Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
 <p>Single-ended cordset female, angled, M12, with LED</p>	4	30V	4A	4P3.2	PUR	BK		AL-WWAK4P3.2-L/S370	8045914	8045915	8045916
			4A	4P3.2	PUR	BK		AL-WWAK4P3.2-L/S400	8075517	8075518	8075519
			4A	4P3.2	PUR	GY		AL-WWAK4P3.2-L/S370GY	8059942	8059943	8059944
			4A	4P3.2	PUR	OG		AL-WWAK4P3.2-L/S7400	8058946	8058947	8058948
			4A	4P3.2	PVC	BK		AL-WWAK4P3.2-L/P01BK	8081901	8081902	8081903
			4A	4P3.2	PVC	GY		AL-WWAK4P3.2-L/P00	8051131	8051132	8051133
			4A	4P3.2	PVC	GY		AL-WWAK4P3.2-L/P01	8051340	8051341	8051342
			4+PE	30V	4A	5P3	PUR	BK		AL-WWAK5P3-L/S370	8044221
	4A	5P3	PUR	BK		AL-WWAK5P3-L/S400	8075538	8075539	8075540		
	4A	5P3	PUR	GY		AL-WWAK5P3-L/S370GY	8059945	8059946	8059947		
	4A	5P3	PUR	OG		AL-WWAK5P3-L/S7400	8058949	8058950	8058951		
	4A	5P3	PVC	BK		AL-WWAK5P3-L/P01BK	8081904	8081905	8081906		
	4A	5P3	PVC	GY		AL-WWAK5P3-L/P00	8051134	8051135	8051136		
	4A	5P3	PVC	GY		AL-WWAK5P3-L/P01	8051343	8051344	8051345		
	4A	5P3.1	PUR	BK		AL-WWAK5P3.1-L/S370	8045917	8045918	8045919		
	4A	5P3.1	PUR	BK		AL-WWAK5P3.1-L/S400	8075541	8075542	8075543		
	4A	5P3.1	PUR	GY		AL-WWAK5P3.1-L/S370GY	8059948	8059949	8059950		
	4A	5P3.1	PUR	OG		AL-WWAK5P3.1-L/S7400	8058952	8058953	8058954		
	4A	5P3.1	PVC	BK		AL-WWAK5P3.1-L/P01BK	8081907	8081908	8081909		
	4A	5P3.1	PVC	GY		AL-WWAK5P3.1-L/P00	8051137	8051138	8051139		
4A	5P3.1	PVC	GY		AL-WWAK5P3.1-L/P01	8051346	8051347	8051348			
 <p>Single-ended cordset female, angled, M12, grip body with thread</p>	5	30V	4A	5P3	PUR	OG		AL-WWAK4.5P3-L/S7400	8084866	8085305	8085306
			4A	5P3.1	PUR	OG		AL-WWAK4.5P3.1-L/S7400	8084867	8085307	8085308
	4	250V	4A		PUR	BK		AL-WWAKG4-L/S370	8052829	8052830	8052831
			4A		PUR	BK		AL-WWAKG4-L/S400	8075520	8075521	8075522
			4A		PUR	GY		AL-WWAKG4-L/S370GY	8059092	8059093	8059094
			4A		PUR	OG		AL-WWAKG4-L/S7400	8059095	8059096	8059097
			4A		PVC	BK		AL-WWAKG4-L/P01BK	8082062	8082063	8082064
			4A		PVC	GY		AL-WWAKG4-L/P00	8052832	8052833	8052834
			4A		PVC	GY		AL-WWAKG4-L/P01	8052835	8052836	8052837


\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

	Body				Cable			Item description	L = cable length*		
	Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
 Single-ended cordset male, straight, M12	3	250V	4A	PUR	BK		AL-WAS3-L/S370	8043804	8043805	8043806	
			4A	PUR	BK		AL-WAS3-L/S400	8075478	8075479	8075480	
			4A	PUR	GY		AL-WAS3-L/S370GY	8058955	8058956	8058957	
			4A	PUR	OG		AL-WAS3-L/S7400	8058964	8058965	8058966	
			4A	PVC	BK		AL-WAS3-L/P01BK	8081853	8081854	8081855	
			4A	PVC	GY		AL-WAS3-L/P00	8051049	8051050	8051051	
			4A	PVC	GY		AL-WAS3-L/P01	8051256	8051257	8051258	
	4	250V	4A	PUR	BK		AL-WAS4-L/S370	8043817	8043818	8043819	
			4A	PUR	BK		AL-WAS4-L/S400	8075499	8075500	8075501	
			4A	PUR	GY		AL-WAS4-L/S370GY	8058958	8058959	8058960	
			4A	PUR	OG		AL-WAS4-L/S7400	8058967	8058968	8058969	
			4A	PVC	BK		AL-WAS4-L/P01BK	8081865	8081866	8081867	
			4A	PVC	GY		AL-WAS4-L/P00	8049339	8051058	8051059	
			4A	PVC	GY		AL-WAS4-L/P01	8051268	8051269	8051270	
	4+PE	60V	4A	PUR	BK		AL-WAS5-L/S370	8046024	8046026	8046027	
			4A	PUR	BK		AL-WAS5-L/S400	8075532	8075533	8075534	
			4A	PUR	GY		AL-WAS5-L/S370GY	8058961	8058962	8058963	
			4A	PUR	OG		AL-WAS5-L/S7400	8058970	8058971	8058972	
			4A	PVC	BK		AL-WAS5-L/P01BK	8081877	8081878	8081879	
			4A	PVC	GY		AL-WAS5-L/P00	8051083	8051084	8051085	
			4A	PVC	GY		AL-WAS5-L/P01	8051292	8051293	8051294	
5	60V	4A	PUR	BK		AL-WAS4.5-L/S370	8043829	8043830	8043831		
		4A	PUR	BK		AL-WAS4.5-L/S400	8075547	8075548	8075549		
		4A	PUR	GY		AL-WAS4.5-L/S370GY	8092298	8092299	8092300		
		4A	PUR	OG		AL-WAS4.5-L/S7400	8084860	8085292	8085293		
		4A	PVC	GY		AL-WAS4.5-L/P00	8051072	8051073	8049345		
		4A	PVC	GY		AL-WAS4.5-L/P01	8051280	8051281	8051282		
8	30V	2A	PUR	BK		AL-WAS8-L/S370	8046909	8046910	8046911		
		2A	PUR	BK		AL-WAS8-L/S400	8075559	8075560	8075561		
		2A	PUR	GY		AL-WAS8-L/S370GY	8092334	8092335	8092336		
		2A	PVC	GY		AL-WAS8-L/P00	8051095	8051096	8051097		
		2A	PVC	GY		AL-WAS8-L/P01	8051304	8051305	8051306		



\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Body				Cable			Item description	L = cable length*		
		Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
	Single-ended cordset male, straight, M12	12	30V	1.5A	PUR	BK		AL-WAS12-L/S370	8046926	8046927	8046928	
				1.5A	PUR	BK		AL-WAS12-L/S400	8075571	8075572	8075573	
				1.5A	PUR	GY		AL-WAS12-L/S370GY	8092361	8092362	8092363	
				1.5A	PVC	GY		AL-WAS12-L/P00	8051107	8051108	8051109	
				1.5A	PVC	GY		AL-WAS12-L/P01	8051316	8051317	8051318	
	Single-ended cordset male, straight, M12, grip body with thread	4	250V	4A	PUR	BK		AL-WASG4-L/S370	8052838	8052839	8052840	
				4A	PUR	BK		AL-WASG4-L/S400	8075502	8075503	8075504	
				4A	PUR	GY		AL-WASG4-L/S370GY	8059098	8059099	8059100	
				4A	PUR	OG		AL-WASG4-L/S7400	8059101	8059102	8059103	
				4A	PVC	BK		AL-WASG4-L/P01BK	8082065	8082066	8082067	
				4A	PVC	GY		AL-WASG4-L/P00	8052841	8052842	8052843	
				4A	PVC	GY		AL-WASG4-L/P01	8052844	8052845	8052846	


\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

	Body				Cable			Item description	L = cable length*		
	Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
 Single-ended cordset male, angled, M12	3	250V	4A		PUR	BK		AL-WWAS3-L/S370	8043808	8043809	8043810
			4A		PUR	BK		AL-WWAS3-L/S400	8075487	8075488	8075489
			4A		PUR	GY		AL-WWAS3-L/S370GY	8058973	8058974	8058975
			4A		PUR	OG		AL-WWAS3-L/S7400	8058982	8058983	8058984
			4A		PVC	BK		AL-WWAS3-L/P01BK	8081856	8081857	8081858
			4A		PVC	GY		AL-WWAS3-L/P00	8051052	8051053	8051054
			4A		PVC	GY		AL-WWAS3-L/P01	8051259	8051260	8051261
	4	250V	4A		PUR	BK		AL-WWAS4-L/S370	8043820	8043821	8043822
			4A		PUR	BK		AL-WWAS4-L/S400	8075523	8075524	8075525
			4A		PUR	GY		AL-WWAS4-L/S370GY	8058976	8058977	8058978
			4A		PUR	OG		AL-WWAS4-L/S7400	8058985	8058986	8058987
			4A		PVC	BK		AL-WWAK4-L/P01BK	8081862	8081863	8081864
			4A		PVC	BK		AL-WWAS4-L/P01BK	8081868	8081869	8081870
			4A		PVC	GY		AL-WWAS4-L/P00	8051869	8051870	8051871
4+PE	60V	4A		PVC	GY		AL-WWAS4-L/P01	8051271	8051272	8051273	
		4A		PUR	BK		AL-WWAS5-L/S370	8046028	8046029	8046030	
		4A		PUR	BK		AL-WWAS5-L/S400	8075544	8075545	8075546	
		4A		PUR	GY		AL-WWAS5-L/S370GY	8058979	8058980	8058981	
		4A		PUR	OG		AL-WWAS5-L/S7400	8058988	8058989	8058990	
		4A		PVC	BK		AL-WWAS5-L/P01BK	8081880	8081881	8081882	
		4A		PVC	GY		AL-WWAS5-L/P00	8051086	8051087	8051088	
5	60V	4A		PVC	GY		AL-WWAS5-L/P01	8051295	8051296	8051297	
		4A		PUR	BK		AL-WWAS4.5-L/S370	8043832	8043833	8043834	
		4A		PUR	BK		AL-WWAS4.5-L/S400	8075553	8075554	8075555	
		4A		PUR	GY		AL-WWAS4.5-L/S370GY	8092307	8092308	8092309	
		4A		PUR	OG		AL-WWAS4.5-L/S7400	8084861	8085294	8085295	
		4A		PVC	GY		AL-WWAS4.5-L/P00	8051074	8051075	8051076	
8	30V	4A		PVC	GY		AL-WWAS4.5-L/P01	8051283	8051284	8051285	
		2A		PUR	BK		AL-WWAS8-L/S370	8046912	8046913	8046914	
		2A		PUR	BK		AL-WWAS8-L/S400	8075565	8075566	8075567	
		2A		PUR	GY		AL-WWAS8-L/S370GY	8092340	8092341	8092342	
		2A		PVC	GY		AL-WWAS8-L/P00	8051098	8051099	8051100	
			2A		PVC	GY	AL-WWAS8-L/P01	8051307	8051308	8051309	



\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Body				Cable			L = cable length*					
		Pins	U[max]	I[max]	LED	Material	Color	UL	Item description					
	Single-ended cordset male, angled, M12	12	30V	1.5A		PUR	BK		AL-WWAS12-L/S370			8046929	8046930	8046931
				1.5A		PUR	BK		AL-WWAS12-L/S400			8075577	8075578	8075579
				1.5A		PUR	GY		AL-WWAS12-L/S370GY			8092367	8092368	8092369
				1.5A		PVC	GY		AL-WWAS12-L/P00			8051110	8051111	8051112
				1.5A		PVC	GY		AL-WWAS12-L/P01			8051319	8051321	8051320
	Single-ended cordset male, angled, M12, grip body with thread	4	250V	4A		PUR	BK		AL-WWASG4-L/S370			8052847	8052848	8052849
				4A		PUR	BK		AL-WWASG4-L/S400			8075526	8075527	8075528
				4A		PUR	GY		AL-WWASG4-L/S370GY			8059104	8059105	8059106
				4A		PUR	OG		AL-WWASG4-L/S7400			8059107	8059108	8059109
				4A		PVC	BK		AL-WWASG4-L/P01BK			8082068	8082069	8082070
				4A		PVC	GY		AL-WWASG4-L/P00			8052850	8052851	8052852
				4A		PVC	GY		AL-WWASG4-L/P01			8052853	8052854	8052855

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.


	Body				Cable			Item description	L = cable length*		
	Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
 <p>Double-ended cordset female, straight, M12 male, straight, M12</p>	3	250V	4A		PUR	BK		AL-WAK3-L-AL-WAS3/S370	8044858	8044029	8044030
			4A		PUR	GY		AL-WAK3-L-AL-WAS3/S370GY	8058889	8058890	8058891
			4A		PUR	OG		AL-WAK3-L-AL-WAS3/S7400	8058921	8058898	8058899
			4A		PVC	BK		AL-WAK3-L-AL-WAS3/P01BK	8081952	8081953	8081954
			4A		PVC	GY		AL-WAK3-L-AL-WAS3/P00	8051459	8051460	8051461
			4A		PVC	GY		AL-WAK3-L-AL-WAS3/P01	8051667	8051668	8051669
	4	250V	4A		PUR	BK		AL-WAK4-L-AL-WAS4/S370	8044813	8044041	8044042
			4A		PUR	GY		AL-WAK4-L-AL-WAS4/S370GY	8058892	8058893	8058894
			4A		PUR	OG		AL-WAK4-L-AL-WAS4/S7400	8057296	8057322	8057324
			4A		PVC	BK		AL-WAK4-L-AL-WAS4/P01BK	8081964	8081965	8081966
			4A		PVC	GY		AL-WAK4-L-AL-WAS4/P00	8051471	8051472	8051473
			4A		PVC	GY		AL-WAK4-L-AL-WAS4/P01	8051679	8051680	8051681
	4+PE	60V	4A		PUR	BK		AL-WAK5-L-AL-WAS5/S370	8046647	8046031	8046032
			4A		PUR	GY		AL-WAK5-L-AL-WAS5/S370GY	8058895	8058896	8058897
			4A		PUR	OG		AL-WAK5-L-AL-WAS5/S7400	8058900	8058901	8058902
			4A		PVC	BK		AL-WAK5-L-AL-WAS5/P01BK	8081976	8081977	8081978
			4A		PVC	GY		AL-WAK5-L-AL-WAS5/P00	8051495	8051496	8051497
			4A		PVC	GY		AL-WAK5-L-AL-WAS5/P01	8051703	8051704	8051705
5	60V	4A		PUR	BK		AL-WAK4.5-L-AL-WAS4.5/S370	8050226	8044053	8044054	
		4A		PUR	GY		AL-WAK4.5-L-AL-WAS4.5/S370GY	8092310	8092311	8092312	
		4A		PUR	OG		AL-WAK4.5-L-AL-WAS4.5/S7400	8085296	8084862	8085297	
		4A		PVC	GY		AL-WAK4.5-L-AL-WAS4.5/P00	8051483	8051484	8051485	
		4A		PVC	GY		AL-WAK4.5-L-AL-WAS4.5/P01	8051691	8051692	8051693	
8	30V	2A		PUR	BK		AL-WAK8-L-AL-WAS8/S370	8049781	8046932	8046933	
		2A		PUR	GY		AL-WAK8-L-AL-WAS8/S370GY	8092343	8092344	8092345	
		2A		PVC	GY		AL-WAK8-L-AL-WAS8/P00	8051507	8051508	8051509	
		2A		PVC	GY		AL-WAK8-L-AL-WAS8/P01	8051715	8051716	8051717	
12	30V	1.5A		PUR	BK		AL-WAK12-L-AL-WAS12/S370	8051872	8046944	8046945	
		1.5A		PUR	GY		AL-WAK12-L-AL-WAS12/S370GY	8092370	8092371	8092372	
		1.5A		PVC	GY		AL-WAK12-L-AL-WAS12/P00	8051519	8051520	8051521	
		1.5A		PVC	GY		AL-WAK12-L-AL-WAS12/P01	8051727	8051728	8051729	

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.



	Body				Cable			Item description	L = cable length*		
	Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
  Double-ended cordset female, straight, M12 male, angled, M12	3	250V	4A		PUR	BK		AL-WAK3-L-AL-WWAS3/S370	8051873	8044035	8044036
			4A		PUR	GY		AL-WAK3-L-AL-WWAS3/S370GY	8058903	8058904	8058905
			4A		PUR	OG		AL-WAK3-L-AL-WWAS3/S7400	8058912	8058913	8058914
			4A		PVC	BK		AL-WAK3-L-AL-WWAS3/P01BK	8081958	8081959	8081960
			4A		PVC	GY		AL-WAK3-L-AL-WWAS3/P00	8051465	8051466	8051467
			4A		PVC	GY		AL-WAK3-L-AL-WWAS3/P01	8051673	8051674	8051675
	4	250V	4A		PUR	BK		AL-WAK4-L-AL-WWAS4/S370	8051874	8044047	8044048
			4A		PUR	GY		AL-WAK4-L-AL-WWAS4/S370GY	8058906	8058907	8058908
			4A		PUR	OG		AL-WAK4-L-AL-WWAS4/S7400	8058915	8058916	8058917
			4A		PVC	BK		AL-WAK4-L-AL-WWAS4/P01BK	8081970	8081971	8081972
			4A		PVC	GY		AL-WAK4-L-AL-WWAS4/P00	8051477	8051478	8051479
			4A		PVC	GY		AL-WAK4-L-AL-WWAS4/P01	8051685	8051686	8051687
4+PE	60V	4A		PUR	BK		AL-WAK5-L-AL-WWAS5/S370	8046056	8046037	8046038	
		4A		PUR	GY		AL-WAK5-L-AL-WWAS5/S370GY	8058909	8058910	8058911	
		4A		PUR	OG		AL-WAK5-L-AL-WWAS5/S7400	8058918	8058919	8058920	
		4A		PVC	BK		AL-WAK5-L-AL-WWAS5/P01BK	8081982	8081983	8081984	
		4A		PVC	GY		AL-WAK5-L-AL-WWAS5/P00	8051501	8051502	8051503	
		4A		PVC	GY		AL-WAK5-L-AL-WWAS5/P01	8051709	8051710	8051711	
5	60V	4A		PUR	BK		AL-WAK4.5-L-AL-WWAS4.5/S370	8051875	8044059	8044060	
		4A		PUR	GY		AL-WAK4.5-L-AL-WWAS4.5/S370GY	8092313	8092314	8092315	
		4A		PUR	OG		AL-WAK4.5-L-AL-WWAS4.5/S7400	8085298	8084863	8085300	
		4A		PVC	GY		AL-WAK4.5-L-AL-WWAS4.5/P00	8051489	8051490	8051491	
		4A		PVC	GY		AL-WAK4.5-L-AL-WWAS4.5/P01	8051697	8051698	8051699	
8	30V	2A		PUR	BK		AL-WAK8-L-AL-WWAS8/S370	8051876	8046938	8046939	
		2A		PUR	GY		AL-WAK8-L-AL-WWAS8/S370GY	8092346	8092347	8092348	
		2A		PVC	GY		AL-WAK8-L-AL-WWAS8/P00	8051513	8051514	8051515	
		2A		PVC	GY		AL-WAK8-L-AL-WWAS8/P01	8051721	8051722	8051723	
12	30V	1.5A		PUR	BK		AL-WAK12-L-AL-WWAS12/S370	8051877	8046950	8046951	
		1.5A		PUR	GY		AL-WAK12-L-AL-WWAS12/S370GY	8092373	8092374	8092375	
		1.5A		PVC	GY		AL-WAK12-L-AL-WWAS12/P00	8051525	8051526	8051527	
		1.5A		PVC	GY		AL-WAK12-L-AL-WWAS12/P01	8051733	8051734	8051735	

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.




		Body				Cable				L = cable length*		
		Pins	U[max]	I[max]	LED	Material	Color	UL	Item description	2m / 1m	5m / 2m	10m / 5m
 <p>Double-ended cordset female, straight, M12, with LED male, straight, M12</p>	3	30V	4A	3P2	PUR	BK		AL-WAK3P2-L-AL-WAS3/S370	8052751	8049895	8049896	
			4A	3P2	PUR	GY		AL-WAK3P2-L-AL-WAS3/S370GY	8059034	8059035	8059036	
			4A	3P2	PUR	OG		AL-WAK3P2-L-AL-WAS3/S7400	8059040	8059041	8059042	
			4A	3P2	PVC	BK		AL-WAK3P2-L-AL-WAS3/P01BK	8082059	8082060	8082061	
			4A	3P2	PVC	GY		AL-WAK3P2-L-AL-WAS3/P00	8052745	8052747	8052746	
			4A	3P2	PVC	GY		AL-WAK3P2-L-AL-WAS3/P01	8052749	8052748	8052750	
	4	30V	4A	4P2	PUR	BK		AL-WAK4P2-L-AL-WAS4/S370	8049946	8052064	8052065	
			4A	4P2	PUR	GY		AL-WAK4P2-L-AL-WAS4/S370GY	8059037	8059038	8059039	
			4A	4P2	PUR	OG		AL-WAK4P2-L-AL-WAS4/S7400	8059043	8059044	8059045	
			4A	4P2	PVC	BK		AL-WAK4P2-L-AL-WAS4/P01BK	8082028	8082029	8082030	
			4A	4P2	PVC	GY		AL-WAK4P2-L-AL-WAS4/P00	8052520	8052521	8052522	
			4A	4P2	PVC	GY		AL-WAK4P2-L-AL-WAS4/P01	8052523	8052524	8052525	



\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

	Body				Cable			Item description	L = cable length*		
	Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
  Double-ended cordset female, angled, M12 male, straight, M12	3	250V	4A		PUR	BK		AL-WWAK3-L-AL-WAS3/S370	8047133	8044038	8044039
			4A		PUR	GY		AL-WWAK3-L-AL-WAS3/S370GY	8058998	8058999	8059000
			4A		PUR	OG		AL-WWAK3-L-AL-WAS3/S7400	8059007	8059008	8059009
			4A		PVC	BK		AL-WWAK3-L-AL-WAS3/P01BK	8081961	8081962	8081963
			4A		PVC	GY		AL-WWAK3-L-AL-WAS3/P00	8051468	8051469	8051470
			4A		PVC	GY		AL-WWAK3-L-AL-WAS3/P01	8051676	8051677	8051678
	4	250V	4A		PUR	BK		AL-WWAK4-L-AL-WAS4/S370	8044664	8044050	8044051
			4A		PUR	GY		AL-WWAK4-L-AL-WAS4/S370GY	8059001	8059002	8059003
			4A		PUR	OG		AL-WWAK4-L-AL-WAS4/S7400	8059010	8059011	8059012
			4A		PVC	BK		AL-WWAK4-L-AL-WAS4/P01BK	8081973	8081974	8081975
			4A		PVC	GY		AL-WWAK4-L-AL-WAS4/P00	8051480	8051481	8051482
			4A		PVC	GY		AL-WWAK4-L-AL-WAS4/P01	8051688	8051689	8051690
	4+PE	60V	4A		PUR	BK		AL-WWAK5-L-AL-WAS5/S370	8046055	8046040	8046041
			4A		PUR	GY		AL-WWAK5-L-AL-WAS5/S370GY	8059004	8059005	8059006
			4A		PUR	OG		AL-WWAK5-L-AL-WAS5/S7400	8059013	8059014	8059015
			4A		PVC	BK		AL-WWAK5-L-AL-WAS5/P01BK	8081985	8081986	8081987
			4A		PVC	GY		AL-WWAK5-L-AL-WAS5/P00	8051504	8051505	8051506
			4A		PVC	GY		AL-WWAK5-L-AL-WAS5/P01	8051712	8051713	8051714
5	60V	4A		PUR	BK		AL-WWAK4.5-L-AL-WAS4.5/S370	8050444	8044062	8044063	
		4A		PUR	GY		AL-WWAK4.5-L-AL-WAS4.5/S370GY	8092316	8092317	8092302	
		4A		PUR	OG		AL-WWAK4.5-L-AL-WAS4.5/S7400	8085301	8084864	8085302	
		4A		PVC	GY		AL-WWAK4.5-L-AL-WAS4.5/P00	8051492	8051493	8051494	
		4A		PVC	GY		AL-WWAK4.5-L-AL-WAS4.5/P01	8051700	8051701	8051702	
8	30V	2A		PUR	BK		AL-WWAK8-L-AL-WAS8/S370	8048889	8046941	8046942	
		2A		PUR	GY		AL-WWAK8-L-AL-WAS8/S370GY	8092349	8092350	8092351	
		2A		PVC	GY		AL-WWAK8-L-AL-WAS8/P00	8051516	8051517	8051518	
		2A		PVC	GY		AL-WWAK8-L-AL-WAS8/P01	8051724	8051725	8051726	
12	30V	1.5A		PUR	BK		AL-WWAK12-L-AL-WAS12/S370	8051878	8046953	8046954	
		1.5A		PUR	GY		AL-WWAK12-L-AL-WAS12/S370GY	8092376	8092377	8092378	
		1.5A		PVC	GY		AL-WWAK12-L-AL-WAS12/P00	8051528	8051529	8051530	
		1.5A		PVC	GY		AL-WWAK12-L-AL-WAS12/P01	8051736	8051737	8051738	



\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

	Body				Cable			Item description	L = cable length*		
	Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
 <p>Double-ended cordset female, angled, M12 male, angled, M12</p>	3	250V	4A		PUR	BK		AL-WWAK3-L-AL-WWAS3/S370	8049108	8044032	8044033
			4A		PUR	GY		AL-WWAK3-L-AL-WWAS3/S370GY	8059016	8059017	8059018
			4A		PUR	OG		AL-WWAK3-L-AL-WWAS3/S7400	8059025	8059026	8059027
			4A		PVC	BK		AL-WWAK3-L-AL-WWAS3/P01BK	8081955	8081956	8081957
			4A		PVC	GY		AL-WWAK3-L-AL-WWAS3/P00	8051462	8051463	8051464
			4A		PVC	GY		AL-WWAK3-L-AL-WWAS3/P01	8051671	8051670	8051672
	4	250V	4A		PUR	BK		AL-WWAK4-L-AL-WWAS4/S370	8051879	8044044	8044045
			4A		PUR	GY		AL-WWAK4-L-AL-WWAS4/S370GY	8059019	8059020	8059021
			4A		PUR	OG		AL-WWAK4-L-AL-WWAS4/S7400	8059028	8059029	8059030
			4A		PVC	BK		AL-WWAK4-L-AL-WWAS4/P01BK	8081967	8081968	8081969
			4A		PVC	GY		AL-WWAK4-L-AL-WWAS4/P00	8051474	8051475	8051476
			4A		PVC	GY		AL-WWAK4-L-AL-WWAS4/P01	8051682	8051683	8051684
	4+PE	60V	4A		PUR	BK		AL-WWAK5-L-AL-WWAS5/S370	8051881	8046034	8046035
			4A		PUR	GY		AL-WWAK5-L-AL-WWAS5/S370GY	8059022	8059023	8059024
			4A		PUR	OG		AL-WWAK5-L-AL-WWAS5/S7400	8059031	8059032	8059033
			4A		PVC	BK		AL-WWAK5-L-AL-WWAS5/P01BK	8081979	8081980	8081981
			4A		PVC	GY		AL-WWAK5-L-AL-WWAS5/P00	8051498	8051499	8051500
			4A		PVC	GY		AL-WWAK5-L-AL-WWAS5/P01	8051706	8051707	8051708
5	60V	4A		PUR	BK		AL-WWAK4.5-L-AL-WWAS4.5/S370	8051880	8044056	8044057	
		4A		PUR	GY		AL-WWAK4.5-L-AL-WWAS4.5/S370GY	8092329	8092330	8092303	
		4A		PUR	OG		AL-WWAK4.5-L-AL-WWAS4.5/S7400	8085303	8084865	8085304	
		4A		PVC	GY		AL-WWAK4.5-L-AL-WWAS4.5/P00	8051486	8051487	8051488	
		4A		PVC	GY		AL-WWAK4.5-L-AL-WWAS4.5/P01	8051694	8051695	8051696	
8	30V	2A		PUR	BK		AL-WWAK8-L-AL-WWAS8/S370	8051882	8046935	8046936	
		2A		PUR	GY		AL-WWAK8-L-AL-WWAS8/S370GY	8092354	8092355	8092356	
		2A		PVC	GY		AL-WWAK8-L-AL-WWAS8/P00	8051510	8051511	8051512	
		2A		PVC	GY		AL-WWAK8-L-AL-WWAS8/P01	8051718	8051719	8051720	
12	30V	1.5A		PUR	BK		AL-WWAK12-L-AL-WWAS12/S370	8051883	8046947	8046948	
		1.5A		PUR	GY		AL-WWAK12-L-AL-WWAS12/S370GY	8092380	8092381	8092382	
		1.5A		PVC	GY		AL-WWAK12-L-AL-WWAS12/P00	8051522	8051523	8051524	
		1.5A		PVC	GY		AL-WWAK12-L-AL-WWAS12/P01	8051730	8051731	8051732	


\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

	Body				Cable			Item description	L = cable length*		
	Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
  <p>Double-ended cordset female, angled, M12, with LED male, straight, M12</p>	3	30V	4A	3P2	PUR	BK		AL-WWAK3P2-L-AL-WAS3/S370	8048160	8045579	8045503
			4A	3P2	PUR	GY		AL-WWAK3P2-L-AL-WAS3/S370GY	8059046	8059047	8059048
			4A	3P2	PUR	OG		AL-WWAK3P2-L-AL-WAS3/S7400	8059067	8059068	8059069
			4A	3P2	PVC	BK		AL-WWAK3P2-L-AL-WAS3/P01BK	8081991	8081992	8081993
			4A	3P2	PVC	GY		AL-WWAK3P2-L-AL-WAS3/P00	8051537	8051538	8051539
			4A	3P2	PVC	GY		AL-WWAK3P2-L-AL-WAS3/P01	8051745	8051746	8051747
	4	30V	4A	4P2	PUR	BK		AL-WWAK4P2-L-AL-WAS4/S370	8043925	8045920	8045921
			4A	4P2	PUR	GY		AL-WWAK4P2-L-AL-WAS4/S370GY	8059049	8059050	8059051
			4A	4P2	PUR	OG		AL-WWAK4P2-L-AL-WAS4/S7400	8059070	8059071	8059072
			4A	4P2	PVC	BK		AL-WWAK4P2-L-AL-WAS4/P01BK	8081994	8081995	8081996
			4A	4P2	PVC	GY		AL-WWAK4P2-L-AL-WAS4/P00	8051540	8051541	8051542
			4A	4P2	PVC	GY		AL-WWAK4P2-L-AL-WAS4/P01	8051748	8051749	8051750
			4A	4P3	PUR	BK		AL-WWAK4P3-L-AL-WAS4/S370	8049739	8045923	8045924
			4A	4P3	PUR	GY		AL-WWAK4P3-L-AL-WAS4/S370GY	8059052	8059053	8059054
4A			4P3	PUR	OG		AL-WWAK4P3-L-AL-WAS4/S7400	8058054	8057297	8057321	
4A			4P3	PVC	BK		AL-WWAK4P3-L-AL-WAS4/P01BK	8081997	8081998	8081999	
4A			4P3	PVC	GY		AL-WWAK4P3-L-AL-WAS4/P00	8051543	8051545	8051544	
4A			4P3	PVC	GY		AL-WWAK4P3-L-AL-WAS4/P01	8051751	8051752	8051753	
4A			4P3.1	PUR	BK		AL-WWAK4P3.1-L-AL-WAS4/S370	8051884	8045926	8045927	
4A			4P3.1	PUR	GY		AL-WWAK4P3.1-L-AL-WAS4/S370GY	8059055	8059056	8059057	
4A			4P3.1	PUR	OG		AL-WWAK4P3.1-L-AL-WAS4/S7400	8059073	8059074	8059075	
4A			4P3.1	PVC	BK		AL-WWAK4P3.1-L-AL-WAS4/P01BK	8082000	8082001	8082002	
4A			4P3.1	PVC	GY		AL-WWAK4P3.1-L-AL-WAS4/P00	8051546	8051547	8051548	
4A			4P3.1	PVC	GY		AL-WWAK4P3.1-L-AL-WAS4/P01	8051754	8051755	8051756	
4A			4P3.2	PUR	BK		AL-WWAK4P3.2-L-AL-WAS4/S370	8048140	8045929	8045930	
4A			4P3.2	PUR	GY		AL-WWAK4P3.2-L-AL-WAS4/S370GY	8059058	8059059	8059060	
4A	4P3.2	PUR	OG		AL-WWAK4P3.2-L-AL-WAS4/S7400	8059076	8059077	8059078			
4A	4P3.2	PVC	BK		AL-WWAK4P3.2-L-AL-WAS4/P01BK	8082004	8082005	8082006			
4A	4P3.2	PVC	GY		AL-WWAK4P3.2-L-AL-WAS4/P00	8051549	8051550	8051551			
4A	4P3.2	PVC	GY		AL-WWAK4P3.2-L-AL-WAS4/P01	8051757	8051758	8051759			


\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

	Body				Cable			Item description	L = cable length*		
	Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
 <p>Double-ended cordset female, angled, M12, with LED</p>	4+PE	30V	4A	5P3	PUR	BK		AL-WWAK5P3-L-AL-WAS5/S370	8051885	8045581	8045583
			4A	5P3	PUR	GY		AL-WWAK5P3-L-AL-WAS5/S370GY	8059061	8059062	8059063
			4A	5P3	PUR	OG		AL-WWAK5P3-L-AL-WAS5/S7400	8059079	8059080	8059081
			4A	5P3	PVC	BK		AL-WWAK5P3-L-AL-WAS5/P01BK	8082007	8082008	8082009
			4A	5P3	PVC	GY		AL-WWAK5P3-L-AL-WAS5/P00	8051552	8051553	8051554
			4A	5P3	PVC	GY		AL-WWAK5P3-L-AL-WAS5/P01	8051760	8051761	8051762
			4A	5P3.1	PUR	BK		AL-WWAK5P3.1-L-AL-WAS5/S370	8045017	8045661	8045662
			4A	5P3.1	PUR	GY		AL-WWAK5P3.1-L-AL-WAS5/S370GY	8059064	8059065	8059066
			4A	5P3.1	PUR	OG		AL-WWAK5P3.1-L-AL-WAS5/S7400	8059082	8059083	8059084
			4A	5P3.1	PVC	BK		AL-WWAK5P3.1-L-AL-WAS5/P01BK	8082010	8082011	8082012
			4A	5P3.1	PVC	GY		AL-WWAK5P3.1-L-AL-WAS5/P00	8051555	8051556	8051557
			4A	5P3.1	PVC	GY		AL-WWAK5P3.1-L-AL-WAS5/P01	8051763	8051764	8051765
				5	30V	4A	4.5P3	PUR	OG		AL-WWAK4.5P3-L-AL-WAS4.5/S7400
4A	4.5P3.1	PUR				OG		AL-WWAK4.5P3.1-L-AL-WAS4.5/S7400	8085311	8084869	8085312
 <p>Single-ended cordset female, straight, M12 shielded</p>	3	250V	4A		PUR	BK		AL-WAKS3-L/S370	8046217	8046218	8046219
			4A		PUR	GY		AL-WAKS3-L/S370GY	8091539	8091540	8091541
			4A		PVC	GY		AL-WAKS3-L/P00	8051164	8051165	8051166
			4A		PVC	GY		AL-WAKS3-L/P01	8051374	8051375	8051376
	4	250V	4A		PUR	BK		AL-WAKS4-L/S370	8046229	8046230	8046231
			4A		PUR	GY		AL-WAKS4-L/S370GY	8091588	8091589	8091590
			4A		PVC	GY		AL-WAKS4-L/P00	8051176	8051177	8051178
			4A		PVC	GY		AL-WAKS4-L/P01	8051386	8051387	8051388
	5	60V	4A		PUR	BK		AL-WAKS4.5-L/S370	8045557	8046239	8046240
			4A		PUR	GY		AL-WAKS4.5-L/S370GY	8092192	8092193	8092194
			4A		PVC	GY		AL-WAKS4.5-L/P00	8051188	8051189	8051190
			4A		PVC	GY		AL-WAKS4.5-L/P01	8051398	8051399	8051400
8	30V	2A		PUR	BK		AL-WAKS8-L/S370	8046990	8046991	8046992	
		2A		PUR	GY		AL-WAKS8-L/S370GY	8092218	8092219	8092220	
		2A		PVC	GY		AL-WAKS8-L/P00	8051200	8051201	8051202	
		2A		PVC	GY		AL-WAKS8-L/P01	8051410	8051411	8051412	
12	30V	1.5A		PUR	BK		AL-WAKS12-L/S370	8047001	8047002	8047003	
		1.5A		PUR	GY		AL-WAKS12-L/S370GY	8092268	8092269	8092270	
		1.5A		PVC	GY		AL-WAKS12-L/P00	8051212	8051213	8051214	
		1.5A		PVC	GY		AL-WAKS12-L/P01	8051422	8051423	8051424	


\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

	Body				Cable			Item description	L = cable length*		
	Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
 <p>Single-ended cordset female, angled, M12 shielded</p>	3	250V	4A		PUR	BK		AL-WWAKS3-L/S370	8046220	8046221	8046222
			4A		PUR	GY		AL-WWAKS3-L/S370GY	8091545	8091546	8091547
			4A		PVC	GY		AL-WWAKS3-L/P00	8051167	8051168	8051169
			4A		PVC	GY		AL-WWAKS3-L/P01	8051377	8051378	8051379
	4	250V	4A		PUR	BK		AL-WWAKS4-L/S370	8046232	8045279	8045280
			4A		PUR	GY		AL-WWAKS4-L/S370GY	8091599	8091600	8091601
			4A		PVC	GY		AL-WWAKS4-L/P00	8051179	8051180	8051181
			4A		PVC	GY		AL-WWAKS4-L/P01	8051389	8051390	8051391
	5	60V	4A		PUR	BK		AL-WWAKS4.5-L/S370	8045558	8046242	8046243
			4A		PUR	GY		AL-WWAKS4.5-L/S370GY	8092198	8092199	8092200
			4A		PVC	GY		AL-WWAKS4.5-L/P00	8051191	8051192	8051193
			4A		PVC	GY		AL-WWAKS4.5-L/P01	8051401	8051402	8051403
	8	30V	2A		PUR	BK		AL-WWAKS8-L/S370	8046993	8046994	8046995
			2A		PUR	GY		AL-WWAKS8-L/S370GY	8092250	8092251	8092252
			2A		PVC	GY		AL-WWAKS8-L/P00	8051203	8051204	8051205
			2A		PVC	GY		AL-WWAKS8-L/P01	8051413	8051414	8051415
12	30V	1.5A		PUR	BK		AL-WWAKS12-L/S370	8047004	8047005	8047006	
		1.5A		PUR	GY		AL-WWAKS12-L/S370GY	8092277	8092278	8092279	
		1.5A		PVC	GY		AL-WWAKS12-L/P00	8051216	8051217	8051218	
		1.5A		PVC	GY		AL-WWAKS12-L/P01	8051425	8051426	8051427	

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.


	Body				Cable			Item description	L = cable length*		
	Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
 Single-ended cordset male, straight, M12 shielded	3	250V	4A		PUR	BK		AL-WASS3-L/S370	8046223	8046224	8046225
			4A		PUR	GY		AL-WASS3-L/S370GY	8091542	8091543	8091544
			4A		PVC	GY		AL-WASS3-L/P00	8051170	8051171	8051172
			4A		PVC	GY		AL-WASS3-L/P01	8051380	8051381	8051382
	4	250V	4A		PUR	BK		AL-WASS4-L/S370	8046233	8046234	8046235
			4A		PUR	GY		AL-WASS4-L/S370GY	8091591	8091592	8091593
			4A		PVC	GY		AL-WASS4-L/P00	8051182	8051183	8051184
			4A		PVC	GY		AL-WASS4-L/P01	8051392	8051393	8051394
	5	60V	4A		PUR	BK		AL-WASS4.5-L/S370	8045559	8046244	8046245
			4A		PUR	GY		AL-WASS4.5-L/S370GY	8092195	8092196	8092197
			4A		PVC	GY		AL-WASS4.5-L/P00	8051194	8051195	8051196
			4A		PVC	GY		AL-WASS4.5-L/P01	8051404	8051405	8051406
	8	30V	2A		PUR	BK		AL-WASS8-L/S370	8046807	8046996	8046997
			2A		PUR	GY		AL-WASS8-L/S370GY	8092221	8092222	8092223
			2A		PVC	GY		AL-WASS8-L/P00	8051206	8051207	8051208
			2A		PVC	GY		AL-WASS8-L/P01	8051416	8051417	8051418
12	30V	1.5A		PUR	BK		AL-WASS12-L/S370	8047007	8047008	8047009	
		1.5A		PUR	GY		AL-WASS12-L/S370GY	8092272	8092273	8092274	
		1.5A		PVC	GY		AL-WASS12-L/P00	8051219	8051220	8051221	
		1.5A		PVC	GY		AL-WASS12-L/P01	8051428	8051429	8051430	

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.


	Body				Cable			Item description	L = cable length*		
	Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
 <p>Single-ended cordset male, angled, M12 shielded</p>	3	250V	4A		PUR	BK		AL-WWASS3-L/S370	8046226	8046227	8046228
			4A		PUR	GY		AL-WWASS3-L/S370GY	8091548	8091549	8091550
			4A		PVC	GY		AL-WWASS3-L/P00	8051173	8051174	8051175
			4A		PVC	GY		AL-WWASS3-L/P01	8051383	8051384	8051385
	4	250V	4A		PUR	BK		AL-WWASS4-L/S370	8046236	8046237	8046238
			4A		PUR	GY		AL-WWASS4-L/S370GY	8091602	8091603	8091604
			4A		PVC	GY		AL-WWASS4-L/P00	8051185	8051186	8051187
			4A		PVC	GY		AL-WWASS4-L/P01	8051395	8051396	8051397
	5	60V	4A		PUR	BK		AL-WWASS4.5-L/S370	8045560	8044617	8044618
			4A		PUR	GY		AL-WWASS4.5-L/S370GY	8092201	8092202	8092203
			4A		PVC	GY		AL-WWASS4.5-L/P00	8051198	8051197	8051199
			4A		PVC	GY		AL-WWASS4.5-L/P01	8051407	8051408	8051409
	8	30V	2A		PUR	BK		AL-WWASS8-L/S370	8046998	8046999	8047000
			2A		PUR	GY		AL-WWASS8-L/S370GY	8092253	8092254	8092255
			2A		PVC	GY		AL-WWASS8-L/P00	8051209	8051210	8051211
			2A		PVC	GY		AL-WWASS8-L/P01	8051419	8051420	8051421
12	30V	1.5A		PUR	BK		AL-WWASS12-L/S370	8047010	8047011	8047012	
		1.5A		PUR	GY		AL-WWASS12-L/S370GY	8092280	8092281	8092282	
		1.5A		PVC	GY		AL-WWASS12-L/P00	8051222	8051223	8051224	
		1.5A		PVC	GY		AL-WWASS12-L/P01	8051431	8051432	8051433	

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.




		Body				Cable			L = cable length*			
		Pins	U[max]	I[max]	LED	Material	Color	UL	Item description	2m / 1m	5m / 2m	10m / 5m
	Double-ended cordset female, straight, M12 male, straight, M12 shielded	3	250V	4A		PUR	BK		AL-WAKS3-L-AL-WASS3/S370	8051886	8046270	8046271
				4A		PUR	GY		AL-WAKS3-L-AL-WASS3/S370GY	8091551	8091552	8091553
				4A		PVC	GY		AL-WAKS3-L-AL-WASS3/P00	8051582	8051583	8051584
				4A		PVC	GY		AL-WAKS3-L-AL-WASS3/P01	8051790	8051791	8051792
		4	250V	4A		PUR	BK		AL-WAKS4-L-AL-WASS4/S370	8048241	8046282	8046283
				4A		PUR	GY		AL-WAKS4-L-AL-WASS4/S370GY	8091606	8091607	8091608
				4A		PVC	GY		AL-WAKS4-L-AL-WASS4/P00	8051594	8051595	8051596
				4A		PVC	GY		AL-WAKS4-L-AL-WASS4/P01	8051802	8051803	8051804
		5	60V	4A		PUR	BK		AL-WAKS4.5-L-AL-WASS4.5/S370	8047973	8046294	8046295
				4A		PUR	GY		AL-WAKS4.5-L-AL-WASS4.5/S370GY	8092204	8092205	8092206
				4A		PVC	GY		AL-WAKS4.5-L-AL-WASS4.5/P00	8051606	8051607	8051608
				4A		PVC	GY		AL-WAKS4.5-L-AL-WASS4.5/P01	8051814	8051815	8051816
		8	30V	2A		PUR	BK		AL-WAKS8-L-AL-WASS8/S370	8051887	8046968	8047013
				2A		PUR	GY		AL-WAKS8-L-AL-WASS8/S370GY	8092256	8092257	8092258
				2A		PVC	GY		AL-WAKS8-L-AL-WASS8/P00	8051618	8051619	8051620
				2A		PVC	GY		AL-WAKS8-L-AL-WASS8/P01	8051826	8051827	8051828
12	30V	1.5A		PUR	BK		AL-WAKS12-L-AL-WASS12/S370	8051888	8047024	8047025		
		1.5A		PUR	GY		AL-WAKS12-L-AL-WASS12/S370GY	8092283	8092284	8092285		
		1.5A		PVC	GY		AL-WAKS12-L-AL-WASS12/P00	8051630	8051631	8051632		
		1.5A		PVC	GY		AL-WAKS12-L-AL-WASS12/P01	8051838	8051839	8051840		


\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

	Body				Cable			Item description	L = cable length*		
	Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
 Double-ended cordset female, straight, M12 male, angled, M12 shielded	3	250V	4A		PUR	BK		AL-WAKS3-L-AL-WWASS3/S370	8051889	8046276	8046277
			4A		PUR	GY		AL-WAKS3-L-AL-WWASS3/S370GY	8091554	8091555	8091556
			4A		PVC	GY		AL-WAKS3-L-AL-WWASS3/P00	8051588	8051589	8051590
			4A		PVC	GY		AL-WAKS3-L-AL-WWASS3/P01	8051796	8051797	8051798
	4	250V	4A		PUR	BK		AL-WAKS4-L-AL-WWASS4/S370	8048802	8046288	8046289
			4A		PUR	GY		AL-WAKS4-L-AL-WWASS4/S370GY	8091609	8091610	8091611
			4A		PVC	GY		AL-WAKS4-L-AL-WWASS4/P00	8051600	8051601	8051602
			4A		PVC	GY		AL-WAKS4-L-AL-WWASS4/P01	8051808	8051809	8051810
	5	60V	4A		PUR	BK		AL-WAKS4.5-L-AL-WWASS4.5/S370	8051890	8046300	8046301
			4A		PUR	GY		AL-WAKS4.5-L-AL-WWASS4.5/S370GY	8092207	8092208	8092209
			4A		PVC	GY		AL-WAKS4.5-L-AL-WWASS4.5/P00	8051612	8051613	8051614
			4A		PVC	GY		AL-WAKS4.5-L-AL-WWASS4.5/P01	8051820	8051821	8051822
8	30V	2A		PUR	BK		AL-WAKS8-L-AL-WWASS8/S370	8051891	8047018	8047019	
		2A		PUR	GY		AL-WAKS8-L-AL-WWASS8/S370GY	8092259	8092260	8092261	
		2A		PVC	GY		AL-WAKS8-L-AL-WWASS8/P00	8051624	8051625	8051626	
		2A		PVC	GY		AL-WAKS8-L-AL-WWASS8/P01	8051832	8051833	8051834	
12	30V	1.5A		PUR	BK		AL-WAKS12-L-AL-WWASS12/S370	8051892	8047030	8047031	
		1.5A		PUR	GY		AL-WAKS12-L-AL-WWASS12/S370GY	8092286	8092287	8092288	
		1.5A		PVC	GY		AL-WAKS12-L-AL-WWASS12/P00	8051636	8051637	8051638	
		1.5A		PVC	GY		AL-WAKS12-L-AL-WWASS12/P01	8051844	8051845	8051846	





\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Body				Cable			L = cable length*			
		Pins	U[max]	I[max]	LED	Material	Color	UL	Item description	2m / 1m	5m / 2m	10m / 5m
 <p>Double-ended cordset female, angled, M12 male, straight, M12 shielded</p>	3	250V	4A	PUR	BK	AL-WWAKS3-L-AL-WASS3/S370	8051904	8046279	8046280			
			4A	PUR	GY	AL-WWAKS3-L-AL-WASS3/S370GY	8091557	8091558	8091559			
			4A	PVC	GY	AL-WWAKS3-L-AL-WASS3/P00	8051591	8051592	8051593			
			4A	PVC	GY	AL-WWAKS3-L-AL-WASS3/P01	8051799	8051800	8051801			
	4	250V	4A	PUR	BK	AL-WWAKS4-L-AL-WASS4/S370	8049426	8046291	8046292			
			4A	PUR	GY	AL-WWAKS4-L-AL-WASS4/S370GY	8091612	8091613	8091614			
			4A	PVC	GY	AL-WWAKS4-L-AL-WASS4/P00	8051603	8051604	8051605			
			4A	PVC	GY	AL-WWAKS4-L-AL-WASS4/P01	8051811	8051812	8051813			
	5	60V	4A	PUR	BK	AL-WWAKS4.5-L-AL-WASS4.5/S370	8051897	8046303	8046304			
			4A	PUR	GY	AL-WWAKS4.5-L-AL-WASS4.5/S370GY	8092210	8092211	8092212			
			4A	PVC	GY	AL-WWAKS4.5-L-AL-WASS4.5/P00	8051615	8051616	8051617			
			4A	PVC	GY	AL-WWAKS4.5-L-AL-WASS4.5/P01	8051823	8051824	8051825			
	8	30V	2A	PUR	BK	AL-WWAKS8-L-AL-WASS8/S370	8051898	8047021	8047022			
			2A	PUR	GY	AL-WWAKS8-L-AL-WASS8/S370GY	8092262	8092263	8092264			
			2A	PVC	GY	AL-WWAKS8-L-AL-WASS8/P00	8051627	8051628	8051629			
			2A	PVC	GY	AL-WWAKS8-L-AL-WASS8/P01	8051835	8051836	8051837			
12	30V	1.5A	PUR	BK	AL-WWAKS12-L-AL-WASS12/S370	8051899	8047033	8047034				
		1.5A	PUR	GY	AL-WWAKS12-L-AL-WASS12/S370GY	8092289	8092290	8092291				
		1.5A	PVC	GY	AL-WWAKS12-L-AL-WASS12/P00	8051639	8051640	8051641				
		1.5A	PVC	GY	AL-WWAKS12-L-AL-WASS12/P01	8051847	8051848	8051849				




\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

	Body				Cable			Item description	L = cable length*		
	Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
 <p>Double-ended cordset female, angled, M12 male, angled, M12 shielded</p>	3	250V	4A		PUR	BK		AL-WWAKS3-L-AL-WWASS3/S370	8051900	8046273	8046274
			4A		PUR	GY		AL-WWAKS3-L-AL-WWASS3/S370GY	8091560	8091561	8091562
			4A		PVC	GY		AL-WWAKS3-L-AL-WWASS3/P00	8051585	8051586	8051587
			4A		PVC	GY		AL-WWAKS3-L-AL-WWASS3/P01	8051793	8051794	8051795
	4	250V	4A		PUR	BK		AL-WWAKS4-L-AL-WWASS4/S370	8051901	8046285	8046286
			4A		PUR	GY		AL-WWAKS4-L-AL-WWASS4/S370GY	8091615	8091616	8091617
			4A		PVC	GY		AL-WWAKS4-L-AL-WWASS4/P00	8051597	8051598	8051599
			4A		PVC	GY		AL-WWAKS4-L-AL-WWASS4/P01	8051805	8051806	8051807
	5	60V	4A		PUR	BK		AL-WWAKS4.5-L-AL-WWASS4.5/S370	8051902	8046297	8046298
			4A		PUR	GY		AL-WWAKS4.5-L-AL-WWASS4.5/S370GY	8092213	8092214	8092215
			4A		PVC	GY		AL-WWAKS4.5-L-AL-WWASS4.5/P00	8051609	8051610	8051611
			4A		PVC	GY		AL-WWAKS4.5-L-AL-WWASS4.5/P01	8051817	8051818	8051819
	8	30V	2A		PUR	BK		AL-WWAKS8-L-AL-WWASS8/S370	8048908	8047015	8047016
			2A		PUR	GY		AL-WWAKS8-L-AL-WWASS8/S370GY	8092265	8092266	8092267
			2A		PVC	GY		AL-WWAKS8-L-AL-WWASS8/P00	8051621	8051622	8051623
			2A		PVC	GY		AL-WWAKS8-L-AL-WWASS8/P01	8051829	8051830	8051831
12	30V	1.5A		PUR	BK		AL-WWAKS12-L-AL-WWASS12/S370	8051903	8047027	8047028	
		1.5A		PUR	GY		AL-WWAKS12-L-AL-WWASS12/S370GY	8092292	8092293	8092294	
		1.5A		PVC	GY		AL-WWAKS12-L-AL-WWASS12/P00	8051633	8051634	8051635	
		1.5A		PVC	GY		AL-WWAKS12-L-AL-WWASS12/P01	8051841	8051842	8051843	



\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

	Body				Cable			Item description	L = cable length*		
	Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
 Single-ended cordset female, straight, M8	3	60V	4A	PUR	BK	AL-SKP3-L/S370	8043748	8043749	8043750		
			4A	PUR	BK	AL-SKP3-L/S400	8075430	8075431	8075432		
			4A	PUR	GY	AL-SKP3-L/S370GY	8059110	8059111	8059112		
			4A	PUR	OG	AL-SKP3-L/S7400	8059113	8059114	8059115		
			4A	PVC	BK	AL-SKP3-L/P01BK	8081823	8081824	8081825		
			4A	PVC	GY	AL-SKP3-L/P00	8048639	8048640	8048641		
			4A	PVC	GY	AL-SKP3-L/P01	8051226	8051227	8051228		
 Single-ended cordset female, straight, M8	4	60V	4A	PUR	BK	AL-SKP4-L/S370	8043760	8043761	8043762		
			4A	PUR	BK	AL-SKP4-L/S400	8075445	8075446	8075447		
			4A	PUR	GY	AL-SKP4-L/S370GY	8067754	8067755	8067756		
			4A	PUR	OG	AL-SKP4-L/S7400	8066417	8067456	8067457		
			4A	PVC	BK	AL-SKP4-L/P01BK	8081835	8081836	8081837		
			4A	PVC	GY	AL-SKP4-L/P00	8048645	8048646	8048647		
			4A	PVC	GY	AL-SKP4-L/P01	8051238	8051239	8051240		
 Single-ended cordset female, straight, M8	5	30V	3A	PUR	BK	AL-SKP4.5-L/S370	8051859	8051858	8051860		
			3A	PUR	BK	AL-SKP4.5-L/S400	8075460	8075461	8075462		
			3A	PVC	GY	AL-SKP4.5-L/P00	8047045	8051850	8051851		
 Single-ended cordset female, straight, M8 Pinout 4.028	4	60V	4A	PUR	BK	AL-SKP4.028-L/S370	8086573	8086574	8086575		



\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Body				Cable			Item description	L = cable length*		
		Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
	Single-ended cordset female, angled, M8	3	60V	4A		PUR	BK		AL-SWKP3-L/S370	8043751	8043752	8043753
				4A		PUR	BK		AL-SWKP3-L/S400	8075436	8075437	8075438
				4A		PUR	GY		AL-SWKP3-L/S370GY	8059116	8059117	8059118
				4A		PUR	OG		AL-SWKP3-L/S7400	8059119	8059120	8059121
				4A		PVC	BK		AL-SWKP3-L/P01BK	8081826	8081827	8081828
				4A		PVC	GY		AL-SWKP3-L/P00	8048642	8048643	8048644
				4A		PVC	GY		AL-SWKP3-L/P01	8051229	8051230	8051231
		4	60V	4A		PUR	BK		AL-SWKP4-L/S370	8043763	8043764	8043765
				4A		PUR	BK		AL-SWKP4-L/S400	8075451	8075452	8075453
				4A		PUR	GY		AL-SWKP4-L/S370GY	8067770	8067774	8067775
				4A		PUR	OG		AL-SWKP4-L/S7400	8067467	8067468	8067469
				4A		PVC	BK		AL-SWKP4-L/P01BK	8081838	8081839	8081840
				4A		PVC	GY		AL-SWKP4-L/P00	8048648	8048649	8048650
				4A		PVC	GY		AL-SWKP4-L/P01	8051241	8051242	8051243
5	30V	3A		PUR	BK		AL-SWKP4.5-L/S370	8051861	8051862	8051863		
		3A		PUR	BK		AL-SWKP4.5-L/S400	8075466	8075467	8075468		
		3A		PVC	GY		AL-SWKP4.5-L/P00	8047049	8051852	8051853		
	Single-ended cordset female, angled, M8 Pinout 4.028	4	60V	4A		PUR	BK		AL-SWKP4.028-L/S370	8086576	8086577	8086578
	Single-ended cordset female, angled, M8, with LED	3	30V	4A	3P2	PUR	BK		AL-SWKP3P2-L/S370	8045344	8045419	8045420
				4A	3P2	PUR	BK		AL-SWKP3P2-L/S400	8075439	8075440	8075441
				4A	3P2	PUR	GY		AL-SWKP3P2-L/S370GY	8059122	8059123	8059124
				4A	3P2	PUR	OG		AL-SWKP3P2-L/S7400	8059125	8059126	8059127
				4A	3P2	PVC	BK		AL-SWKP3P2-L/P01BK	8081883	8081884	8081885
				4A	3P2	PVC	GY		AL-SWKP3P2-L/P00	8051113	8051114	8051115
				4A	3P2	PVC	GY		AL-SWKP3P2-L/P01	8051322	8051323	8051324
		4	30V	4A	4P2	PUR	BK		AL-SWKP4P2-L/S370	8045345	8045421	8045422
				4A	4P2	PUR	BK		AL-SWKP4P2-L/S400	8075454	8075455	8075456
				4A	4P2	PUR	GY		AL-SWKP4P2-L/S370GY	8067809	8067810	8067811
				4A	4P2	PUR	OG		AL-SWKP4P2-L/S7400	8067532	8067533	8067534
				4A	4P2	PVC	BK		AL-SWKP4P2-L/P01BK	8081886	8081887	8081888
				4A	4P2	PVC	GY		AL-SWKP4P2-L/P00	8051116	8051117	8051118
				4A	4P2	PVC	GY		AL-SWKP4P2-L/P01	8051325	8051326	8051327

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.



	Body				Cable			Item description	L = cable length*		
	Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
 Single-ended cordset male, straight, M8	3	60V	4A		PUR	BK		AL-SSP3-L/S370	8043754	8043755	8043756
			4A		PUR	BK		AL-SSP3-L/S400	8075433	8075434	8075435
			4A		PUR	GY		AL-SSP3-L/S370GY	8059152	8059153	8059154
			4A		PUR	OG		AL-SSP3-L/S7400	8059155	8059156	8059157
			4A		PVC	BK		AL-SSP3-L/P01BK	8081829	8081830	8081831
			4A		PVC	GY		AL-SSP3-L/P00	8051031	8051032	8051033
			4A		PVC	GY		AL-SSP3-L/P01	8051232	8051233	8051234
	4	60V	4A		PUR	BK		AL-SSP4-L/S370	8043766	8043767	8043768
			4A		PUR	BK		AL-SSP4-L/S400	8075448	8075449	8075450
			4A		PUR	GY		AL-SSP4-L/S370GY	8067758	8067760	8067762
			4A		PUR	OG		AL-SSP4-L/S7400	8067458	8067460	8067461
			4A		PVC	BK		AL-SSP4-L/P01BK	8081841	8081842	8081843
			4A		PVC	GY		AL-SSP4-L/P00	8051037	8051038	8051039
			4A		PVC	GY		AL-SSP4-L/P01	8051244	8051245	8051246
5	30V	3A		PUR	BK		AL-SSP4.5-L/S370	8050052	8050053	8050054	
		3A		PUR	BK		AL-SSP4.5-L/S400	8075463	8075464	8075465	
		3A		PVC	GY		AL-SSP4.5-L/P00	8047066	8050044	8050045	
 Single-ended cordset male, angled, M8	3	60V	4A		PUR	BK		AL-SWSP3-L/S370	8043757	8043758	8043759
			4A		PUR	BK		AL-SWSP3-L/S400	8075442	8075443	8075444
			4A		PUR	GY		AL-SWSP3-L/S370GY	8059158	8059159	8059160
			4A		PUR	OG		AL-SWSP3-L/S7400	8059161	8059162	8059163
			4A		PVC	BK		AL-SWSP3-L/P01BK	8081832	8081833	8081834
			4A		PVC	GY		AL-SWSP3-L/P00	8051034	8051035	8051036
			4A		PVC	GY		AL-SWSP3-L/P01	8051235	8051236	8051237
	4	60V	4A		PUR	BK		AL-SWSP4-L/S370	8043769	8043770	8043771
			4A		PUR	BK		AL-SWSP4-L/S400	8075457	8075458	8075459
			4A		PUR	GY		AL-SWSP4-L/S370GY	8067763	8067764	8067768
			4A		PUR	OG		AL-SWSP4-L/S7400	8067462	8067463	8067464
			4A		PVC	BK		AL-SWSP4-L/P01BK	8081844	8081845	8081846
			4A		PVC	GY		AL-SWSP4-L/P00	8051040	8051041	8051042
			4A		PVC	GY		AL-SWSP4-L/P01	8051247	8051248	8051249
5	30V	3A		PUR	BK		AL-SWSP4.5-L/S370	8050055	8050056	8050057	
		3A		PUR	BK		AL-SWSP4.5-L/S400	8075469	8075470	8075471	
		3A		PVC	GY		AL-SWSP4.5-L/P00	8047050	8050046	8050047	

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.




		Body				Cable			L = cable length*			
		Pins	U[max]	I[max]	LED	Material	Color	UL	Item description	2m / 1m	5m / 2m	10m / 5m
	Double-ended cordset female, straight, M8 male, straight, M8	3	60V	4A		PUR	BK		AL-SKP3-L-AL-SSP3/S370	8044811	8044002	8044003
				4A		PUR	GY		AL-SKP3-L-AL-SSP3/S370GY	8059176	8059177	8059178
				4A		PUR	OG		AL-SKP3-L-AL-SSP3/S7400	8059179	8059180	8059181
				4A		PVC	BK		AL-SKP3-L-AL-SSP3/P01BK	8081927	8081928	8081929
				4A		PVC	GY		AL-SKP3-L-AL-SSP3/P00	8051434	8051435	8051436
				4A		PVC	GY		AL-SKP3-L-AL-SSP3/P01	8051642	8051643	8051644
		4	60V	4A		PUR	BK		AL-SKP4-L-AL-SSP4/S370	8045944	8044017	8044018
				4A		PUR	GY		AL-SKP4-L-AL-SSP4/S370GY	8067813	8067904	8067909
				4A		PUR	OG		AL-SKP4-L-AL-SSP4/S7400	8067535	8067537	8067549
				4A		PVC	BK		AL-SKP4-L-AL-SSP4/P01BK	8081940	8081941	8081942
				4A		PVC	GY		AL-SKP4-L-AL-SSP4/P00	8051447	8051448	8051449
				4A		PVC	GY		AL-SKP4-L-AL-SSP4/P01	8051655	8051656	8051657
		5	30V	3A		PUR	BK		AL-SKP4.5-L-AL-SSP4.5/S370	8052755	8052756	8052757
				3A		PVC	GY		AL-SKP4.5-L-AL-SSP4.5/P00	8052860	8042846	8042848
	Double-ended cordset female, straight, M8 male, angled, M8	3	60V	4A		PUR	BK		AL-SKP3-L-AL-SWSP3/S370	8051913	8044011	8044012
				4A		PUR	GY		AL-SKP3-L-AL-SWSP3/S370GY	8059182	8059183	8059184
				4A		PUR	OG		AL-SKP3-L-AL-SWSP3/S7400	8059185	8059186	8059188
				4A		PVC	BK		AL-SKP3-L-AL-SWSP3/P01BK	8081933	8081934	8081936
				4A		PVC	GY		AL-SKP3-L-AL-SWSP3/P00	8051440	8051441	8051442
				4A		PVC	GY		AL-SKP3-L-AL-SWSP3/P01	8051649	8051650	8051651
		4	60V	4A		PUR	BK		AL-SKP4-L-AL-SWSP4/S370	8046587	8044023	8044024
				4A		PUR	GY		AL-SKP4-L-AL-SWSP4/S370GY	8067914	8067915	8067917
				4A		PUR	OG		AL-SKP4-L-AL-SWSP4/S7400	8067559	8067560	8067633
				4A		PVC	BK		AL-SKP4-L-AL-SWSP4/P01BK	8081946	8081947	8081948
				4A		PVC	GY		AL-SKP4-L-AL-SWSP4/P00	8051453	8051454	8051455
				4A		PVC	GY		AL-SKP4-L-AL-SWSP4/P01	8051661	8051662	8051663
		5	30V	3A		PUR	BK		AL-SKP4.5-L-AL-SWSP4.5/S370	8052764	8052765	8052766
				3A		PVC	GY		AL-SKP4.5-L-AL-SWSP4.5/P00	8042859	8042860	8042861

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.






		Body				Cable			Item description	L = cable length*		
		Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
	Double-ended cordset female, angled, M8 male, straight, M8	3	60V	4A		PUR	BK		AL-SWKP3-L-AL-SSP3/S370	8044842	8044014	8044015
				4A		PUR	GY		AL-SWKP3-L-AL-SSP3/S370GY	8059189	8059190	8059191
				4A		PUR	OG		AL-SWKP3-L-AL-SSP3/S7400	8059192	8059193	8059194
				4A		PVC	BK		AL-SWKP3-L-AL-SSP3/P01BK	8081937	8081938	8081939
				4A		PVC	GY		AL-SWKP3-L-AL-SSP3/P00	8051444	8051445	8051446
				4A		PVC	GY		AL-SWKP3-L-AL-SSP3/P01	8051652	8051653	8051654
	4	60V	4A		PUR	BK		AL-SWKP4-L-AL-SSP4/S370	8046576	8044026	8044027	
			4A		PUR	GY		AL-SWKP4-L-AL-SSP4/S370GY	8067918	8067920	8067967	
			4A		PUR	OG		AL-SWKP4-L-AL-SSP4/S7400	8067634	8067641	8067648	
			4A		PVC	BK		AL-SWKP4-L-AL-SSP4/P01BK	8081949	8081950	8081951	
			4A		PVC	GY		AL-SWKP4-L-AL-SSP4/P00	8051456	8051457	8051458	
			4A		PVC	GY		AL-SWKP4-L-AL-SSP4/P01	8051664	8051665	8051666	
5	30V	3A		PUR	BK		AL-SWKP4.5-L-AL-SSP4.5/S370	8052761	8052762	8052763		
		3A		PVC	GY		AL-SWKP4.5-L-AL-SSP4.5/P00	8042855	8050039	8042857		
	Double-ended cordset female, angled, M8 male, angled, M8	3	60V	4A		PUR	BK		AL-SWKP3-L-AL-SWSP3/S370	8046572	8044008	8044009
				4A		PUR	GY		AL-SWKP3-L-AL-SWSP3/S370GY	8059195	8059196	8059197
				4A		PUR	OG		AL-SWKP3-L-AL-SWSP3/S7400	8059198	8059199	8059200
				4A		PVC	BK		AL-SWKP3-L-AL-SWSP3/P01BK	8081930	8081931	8081932
				4A		PVC	GY		AL-SWKP3-L-AL-SWSP3/P00	8051437	8051438	8051439
				4A		PVC	GY		AL-SWKP3-L-AL-SWSP3/P01	8051646	8051647	8051648
	4	60V	4A		PUR	BK		AL-SWKP4-L-AL-SWSP4/S370	8046573	8044020	8044021	
			4A		PUR	GY		AL-SWKP4-L-AL-SWSP4/S370GY	8067910	8067912	8067913	
			4A		PUR	OG		AL-SWKP4-L-AL-SWSP4/S7400	8067554	8067555	8067556	
			4A		PVC	BK		AL-SWKP4-L-AL-SWSP4/P01BK	8081943	8081944	8081945	
			4A		PVC	GY		AL-SWKP4-L-AL-SWSP4/P00	8051450	8051451	8051452	
			4A		PVC	GY		AL-SWKP4-L-AL-SWSP4/P01	8051658	8051659	8051660	
5	30V	3A		PUR	BK		AL-SWKP4.5-L-AL-SWSP4.5/S370	8052758	8052759	8052760		
		3A		PVC	GY		AL-SWKP4.5-L-AL-SWSP4.5/P00	8042850	8050038	8042852		







\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Body				Cable			Item description	L = cable length*		
		Pins	U[max]	l[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
	Double-ended cordset female, angled, M8, with LED male, straight, M8	3	30V	4A	3P2	PUR	BK		AL-SWKP3P2-L-AL-SSP3/S370	8047130	8045932	8045933
				4A	3P2	PUR	GY		AL-SWKP3P2-L-AL-SSP3/S370GY	8059201	8059202	8059203
				4A	3P2	PUR	OG		AL-SWKP3P2-L-AL-SSP3/S7400	8059204	8059205	8059206
				4A	3P2	PVC	BK		AL-SWKP3P2-L-AL-SSP3/P01BK	8082071	8082072	8082073
				4A	3P2	PVC	GY		AL-SWKP3P2-L-AL-SSP3/P00	8051531	8051532	8051533
				4A	3P2	PVC	GY		AL-SWKP3P2-L-AL-SSP3/P01	8051739	8051740	8051741
	Single-ended cordset female, straight, M8 shielded	4	30V	4A	4P2	PUR	BK		AL-SWKP4P2-L-AL-SSP4/S370	8049863	8045935	8045936
				4A	4P2	PUR	GY		AL-SWKP4P2-L-AL-SSP4/S370GY	8067968	8067969	8067970
				4A	4P2	PUR	OG		AL-SWKP4P2-L-AL-SSP4/S7400	8067649	8067703	8067704
				4A	4P2	PVC	BK		AL-SWKP4P2-L-AL-SSP4/P01BK	8081988	8081989	8081990
				4A	4P2	PVC	GY		AL-SWKP4P2-L-AL-SSP4/P00	8051534	8051535	8051536
				4A	4P2	PVC	GY		AL-SWKP4P2-L-AL-SSP4/P01	8051742	8051743	8051744
	Single-ended cordset female, angled, M8 shielded	3	60V	4A		PUR	BK		AL-SKPS3-L/S370	8046192	8046193	8046194
				4A		PUR	GY		AL-SKPS3-L/S370GY	8091071	8091072	8091074
				4A		PVC	GY		AL-SKPS3-L/P00	8051140	8051141	8051142
				4A		PVC	GY		AL-SKPS3-L/P01	8051349	8051350	8051351
		4	60V	4A		PUR	BK		AL-SKPS4-L/S370	8046204	8046205	8046206
				4A		PUR	GY		AL-SKPS4-L/S370GY	8091563	8091564	8091565
				4A		PVC	GY		AL-SKPS4-L/P00	8051152	8051153	8051154
				4A		PVC	GY		AL-SKPS4-L/P01	8051362	8051363	8051364
		5	30V	3A		PUR	BK		AL-SKPS4.5-L/S370	8047058	8051864	8051865
				3A		PUR	GY		AL-SKPS4.5-L/S370GY	8091618	8091619	8091620
				3A		PVC	GY		AL-SKPS4.5-L/P00	8047046	8051854	8051855
				3A		PVC	GY		AL-SKPS4.5-L/P01	8051353	8051354	8051355
		3	60V	4A		PUR	BK		AL-SWKPS3-L/S370	8046195	8046196	8046197
				4A		PUR	GY		AL-SWKPS3-L/S370GY	8091328	8091329	8091330
				4A		PVC	GY		AL-SWKPS3-L/P00	8051143	8051144	8051145
				4A		PVC	GY		AL-SWKPS3-L/P01	8051353	8051354	8051355
		4	60V	4A		PUR	BK		AL-SWKPS4-L/S370	8046207	8046208	8046209
				4A		PUR	GY		AL-SWKPS4-L/S370GY	8091569	8091570	8091571
				4A		PVC	GY		AL-SWKPS4-L/P00	8051155	8051156	8051157
				4A		PVC	GY		AL-SWKPS4-L/P01	8051365	8051366	8051367
		5	30V	3A		PUR	BK		AL-SWKPS4.5-L/S370	8047060	8051866	8051867
				3A		PUR	GY		AL-SWKPS4.5-L/S370GY	8091625	8091626	8091627
				3A		PVC	GY		AL-SWKPS4.5-L/P00	8047051	8051856	8051857
				3A		PVC	GY		AL-SWKPS4.5-L/P01	8051365	8051366	8051367





\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Body				Cable			Item description	L = cable length*		
		Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
	Single-ended cordset male, straight, M8 shielded	3	60V	4A	PUR	BK		AL-SSPS3-L/S370	8046198	8046199	8046200	
				4A	PUR	GY		AL-SSPS3-L/S370GY	8091075	8091325	8091326	
				4A	PVC	GY		AL-SSPS3-L/P00	8051146	8051147	8051148	
				4A	PVC	GY		AL-SSPS3-L/P01	8051356	8051357	8051358	
		4	60V	4A	PUR	BK		AL-SSPS4-L/S370	8046210	8046211	8046212	
				4A	PUR	GY		AL-SSPS4-L/S370GY	8091566	8091567	8091568	
				4A	PVC	GY		AL-SSPS4-L/P00	8051158	8051159	8051160	
				4A	PVC	GY		AL-SSPS4-L/P01	8051368	8051369	8051370	
		5	30V	3A	PUR	BK		AL-SSPS4.5-L/S370	8047061	8050058	8050059	
				3A	PUR	GY		AL-SSPS4.5-L/S370GY	8091622	8091623	8091624	
				3A	PVC	GY		AL-SSPS4.5-L/P00	8047048	8050048	8050049	
			Single-ended cordset male, angled, M8 shielded	3	60V	4A	PUR	BK		AL-SWSPS3-L/S370	8046201	8046202
4A	PUR					GY		AL-SWSPS3-L/S370GY	8091331	8091332	8091333	
4A	PVC					GY		AL-SWSPS3-L/P00	8051149	8051150	8051151	
4A	PVC					GY		AL-SWSPS3-L/P01	8051359	8051360	8051361	
4	60V			4A	PUR	BK		AL-SWSPS4-L/S370	8046214	8046215	8046216	
				4A	PUR	GY		AL-SWSPS4-L/S370GY	8091572	8091573	8091574	
				4A	PVC	GY		AL-SWSPS4-L/P00	8051161	8051162	8051163	
				4A	PVC	GY		AL-SWSPS4-L/P01	8051371	8051372	8051373	
5	30V			3A	PUR	BK		AL-SWSPS4.5-L/S370	8047062	8050060	8050061	
				3A	PUR	GY		AL-SWSPS4.5-L/S370GY	8091628	8091629	8091630	
				3A	PVC	GY		AL-SWSPS4.5-L/P00	8047052	8050050	8050051	
	Double-ended cordset female, straight, M8 shielded			3	60V	4A	PUR	BK		AL-SKPS3-L-AL-SSPS3/S370	8051896	8046246
		4A	PUR			GY		AL-SKPS3-L-AL-SSPS3/S370GY	8091334	8091335	8091336	
		4A	PVC			GY		AL-SKPS3-L-AL-SSPS3/P00	8051558	8051559	8051560	
		4A	PVC			GY		AL-SKPS3-L-AL-SSPS3/P01	8051766	8051767	8051768	
		4	60V	4A	PUR	BK		AL-SKPS4-L-AL-SSPS4/S370	8051914	8046258	8046259	
				4A	PUR	GY		AL-SKPS4-L-AL-SSPS4/S370GY	8091575	8091576	8091577	
				4A	PVC	GY		AL-SKPS4-L-AL-SSPS4/P00	8051570	8051571	8051572	
				4A	PVC	GY		AL-SKPS4-L-AL-SSPS4/P01	8051778	8051779	8051780	
		5	30V	3A	PUR	BK		AL-SKPS4.5-L-AL-SSPS4.5/S370	8052768	8052769	8052770	
				3A	PUR	GY		AL-SKPS4.5-L-AL-SSPS4.5/S370GY	8091632	8091633	8091634	
				3A	PVC	GY		AL-SKPS4.5-L-AL-SSPS4.5/P00	8042863	8042864	8042865	



\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Body				Cable			Item description	L = cable length*		
		Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
 	Double-ended cordset female, straight, M8	3	60V	4A	PUR	BK		AL-SKPS3-L-AL-SWSPS3/S370	8051915	8046252	8046253	
				4A	PUR	GY		AL-SKPS3-L-AL-SWSPS3/S370GY	8091337	8091338	8091339	
				4A	PVC	GY		AL-SKPS3-L-AL-SWSPS3/P00	8051564	8051565	8051566	
				4A	PVC	GY		AL-SKPS3-L-AL-SWSPS3/P01	8051772	8051773	8051774	
	Double-ended cordset male, angled, M8 shielded	4	60V	4A	PUR	BK		AL-SKPS4-L-AL-SWSPS4/S370	8051916	8046264	8046265	
				4A	PUR	GY		AL-SKPS4-L-AL-SWSPS4/S370GY	8091579	8091580	8091581	
				4A	PVC	GY		AL-SKPS4-L-AL-SWSPS4/P00	8051576	8051577	8051578	
				4A	PVC	GY		AL-SKPS4-L-AL-SWSPS4/P01	8051784	8051785	8051786	
		5	30V	3A	PUR	BK		AL-SKPS4.5-L-AL-SWSPS4.5/S370	8052777	8052778	8052779	
				3A	PUR	GY		AL-SKPS4.5-L-AL-SWSPS4.5/S370GY	8091635	8091636	8091637	
				3A	PVC	GY		AL-SKPS4.5-L-AL-SWSPS4.5/P00	8042876	8042877	8042878	
	 	Double-ended cordset female, angled, M8	3	60V	4A	PUR	BK		AL-SWKPS3-L-AL-SSPS3/S370	8051917	8046255	8046256
4A					PUR	GY		AL-SWKPS3-L-AL-SSPS3/S370GY	8091340	8091341	8091342	
4A					PVC	GY		AL-SWKPS3-L-AL-SSPS3/P00	8051567	8051568	8051569	
4A					PVC	GY		AL-SWKPS3-L-AL-SSPS3/P01	8051775	8051776	8051777	
Double-ended cordset male, straight, M8 shielded		4	60V	4A	PUR	BK		AL-SWKPS4-L-AL-SSPS4/S370	8051918	8046267	8046268	
				4A	PUR	GY		AL-SWKPS4-L-AL-SSPS4/S370GY	8091582	8091583	8091584	
				4A	PVC	GY		AL-SWKPS4-L-AL-SSPS4/P00	8051579	8051580	8051581	
				4A	PVC	GY		AL-SWKPS4-L-AL-SSPS4/P01	8051787	8051788	8051789	
		5	30V	3A	PUR	BK		AL-SWKPS4.5-L-AL-SSPS4.5/S370	8052774	8052775	8052776	
				3A	PUR	GY		AL-SWKPS4.5-L-AL-SSPS4.5/S370GY	8091638	8091639	8091640	
				3A	PVC	GY		AL-SWKPS4.5-L-AL-SSPS4.5/P00	8042872	8042873	8042874	
 		Double-ended cordset female, angled, M8	3	60V	4A	PUR	BK		AL-SWKPS3-L-AL-SWSPS3/S370	8051919	8046249	8046250
	4A				PUR	GY		AL-SWKPS3-L-AL-SWSPS3/S370GY	8091343	8091344	8091345	
	4A				PVC	GY		AL-SWKPS3-L-AL-SWSPS3/P00	8051561	8051562	8051563	
	4A				PVC	GY		AL-SWKPS3-L-AL-SWSPS3/P01	8051769	8051770	8051771	
	Double-ended cordset male, angled, M8 shielded	4	60V	4A	PUR	BK		AL-SWKPS4-L-AL-SWSPS4/S370	8051920	8046261	8046262	
				4A	PUR	GY		AL-SWKPS4-L-AL-SWSPS4/S370GY	8091585	8091586	8091587	
				4A	PVC	GY		AL-SWKPS4-L-AL-SWSPS4/P00	8051573	8051574	8051575	
				4A	PVC	GY		AL-SWKPS4-L-AL-SWSPS4/P01	8051781	8051782	8051783	
		5	30V	3A	PUR	BK		AL-SWKPS4.5-L-AL-SWSPS4.5/S370	8052771	8052772	8052773	
				3A	PUR	GY		AL-SWKPS4.5-L-AL-SWSPS4.5/S370GY	8091641	8091642	8091643	
				3A	PVC	GY		AL-SWKPS4.5-L-AL-SWSPS4.5/P00	8042868	8042869	8042870	



\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

	Body				Cable			Item description	L = cable length*		
	Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
 Single-ended cordset female, straight, Ø8mm snap	3	60V	4A	PUR	BK		AL-KP3-L/S370	8051894	8044517	8051895	
			4A	PUR	BK		AL-KP3-L/S400	8075163	8075164	8075410	
			4A	PUR	GY		AL-KP3-L/S370GY	8059128	8059129	8059130	
			4A	PUR	OG		AL-KP3-L/S7400	8059131	8059132	8059133	
			4A	PVC	BK		AL-KP3-L/P01BK	8082013	8082014	8082015	
			4A	PVC	GY		AL-KP3-L/P00	8052490	8052491	8052492	
			4A	PVC	GY		AL-KP3-L/P01	8052493	8052494	8052495	
	4	60V	4A	PUR	BK		AL-KP4-L/S370	8043940	8045033	8052669	
			4A	PUR	BK		AL-KP4-L/S400	8075181	8075182	8075418	
			4A	PUR	GY		AL-KP4-L/S370GY	8067979	8067981	8067982	
			4A	PUR	OG		AL-KP4-L/S7400	8067709	8067708	8067710	
			4A	PVC	BK		AL-KP4-L/P01BK	8082031	8082032	8082033	
			4A	PVC	GY		AL-KP4-L/P00	8052690	8052691	8052692	
			4A	PVC	GY		AL-KP4-L/P01	8052717	8052718	8052719	
	5	30V	3A	PUR	BK		AL-KP4.5-L/S370	8050016	8050017	8050018	
			3A	PUR	BK		AL-KP4.5-L/S400	8075201	8075202	8075424	
			3A	PVC	GY		AL-KP4.5-L/P00	8043847	8050005	8050006	
 Single-ended cordset female, straight, Ø8mm snap Wire cross-section 3x0.14mm <sup>2</sup> + 2x0.34mm <sup>2</sup>	5	30V	3A	PUR	BK		AL-KP4.5-L/S570	8069859	8070116	8070117	








\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Body				Cable			Item description	L = cable length*		
		Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
	Single-ended cordset female, straight, Ø8mm snap, with locking mechanism	3	60V	4A	PUR	BK		AL-ZKP3-L/S370	8052680	8052681	8052682	
				4A	PUR	BK		AL-ZKP3-L/S400	8075175	8075176	8075416	
				4A	PUR	GY		AL-ZKP3-L/S370GY	8059140	8059141	8059142	
				4A	PUR	OG		AL-ZKP3-L/S7400	8059143	8059144	8059145	
				4A	PVC	BK		AL-ZKP3-L/P01BK	8082046	8082047	8082048	
				4A	PVC	GY		AL-ZKP3-L/P00	8052705	8052706	8052707	
				4A	PVC	GY		AL-ZKP3-L/P01	8052733	8052734	8052735	
		4	60V	4A	PUR	BK		AL-ZKP4-L/S370	8046076	8051911	8051912	
				4A	PUR	BK		AL-ZKP4-L/S400	8075193	8075194	8075422	
				4A	PUR	GY		AL-ZKP4-L/S370GY	8068026	8068027	8068028	
				4A	PUR	OG		AL-ZKP4-L/S7400	8067747	8067749	8067750	
				4A	PVC	BK		AL-ZKP4-L/P01BK	8082049	8082050	8082051	
				4A	PVC	GY		AL-ZKP4-L/P00	8052708	8052709	8052710	
				4A	PVC	GY		AL-ZKP4-L/P01	8052736	8052737	8052738	
		5	30V	3A	PUR	BK		AL-ZKP4.5-L/S370	8050025	8050026	8050027	
				3A	PUR	BK		AL-ZKP4.5-L/S400	8075217	8075218	8075428	
				3A	PVC	GY		AL-ZKP4.5-L/P00	8049768	8050009	8050010	
	Single-ended cordset female, angled, Ø8mm snap	3	60V	4A	PUR	BK		AL-WKP3-L/S370	8052670	8044518	8052671	
				4A	PUR	BK		AL-WKP3-L/S400	8075169	8075170	8075412	
				4A	PUR	GY		AL-WKP3-L/S370GY	8059134	8059135	8059136	
				4A	PUR	OG		AL-WKP3-L/S7400	8059137	8059138	8059139	
				4A	PVC	BK		AL-WKP3-L/P01BK	8082037	8082038	8082039	
				4A	PVC	GY		AL-WKP3-L/P00	8052693	8052694	8052695	
				4A	PVC	GY		AL-WKP3-L/P01	8052724	8052725	8052726	
		4	60V	4A	PUR	BK		AL-WKP4-L/S370	8052672	8045620	8052673	
				4A	PUR	BK		AL-WKP4-L/S400	8075187	8075188	8075420	
				4A	PUR	GY		AL-WKP4-L/S370GY	8068015	8068022	8068023	
				4A	PUR	OG		AL-WKP4-L/S7400	8067716	8067745	8067746	
				4A	PVC	BK		AL-WKP4-L/P01BK	8082034	8082035	8082036	
				4A	PVC	GY		AL-WKP4-L/P00	8052696	8052697	8052698	
				4A	PVC	GY		AL-WKP4-L/P01	8052720	8052721	8052722	
		5	30V	3A	PUR	BK		AL-WKP4.5-L/S370	8050022	8050023	8050024	
				3A	PUR	BK		AL-WKP4.5-L/S400	8075207	8075208	8075426	
				3A	PVC	GY		AL-WKP4.5-L/P00	8049767	8050007	8050008	

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.



	Body				Cable			Item description	L = cable length*		
	Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
 Single-ended cordset female, angled, Ø8mm snap, with locking mechanism	3	60V	4A	PUR	BK		AL-ZWKP3-L/S370	8052683	8052684	8052685	
			4A	PUR	BK		AL-ZWKP3-L/S400	8075178	8075179	8075417	
			4A	PUR	GY		AL-ZWKP3-L/S370GY	8059146	8059147	8059148	
			4A	PUR	OG		AL-ZWKP3-L/S7400	8059149	8059150	8059151	
			4A	PVC	BK		AL-ZWKP3-L/P01BK	8082053	8082054	8082055	
			4A	PVC	GY		AL-ZWKP3-L/P00	8052711	8052712	8052713	
			4A	PVC	GY		AL-ZWKP3-L/P01	8052739	8052740	8052741	
	4	60V	4A	PUR	BK		AL-ZWKP4-L/S370	8046075	8052686	8052687	
			4A	PUR	BK		AL-ZWKP4-L/S400	8075198	8075199	8075423	
			4A	PUR	GY		AL-ZWKP4-L/S370GY	8068035	8068036	8068037	
			4A	PUR	OG		AL-ZWKP4-L/S7400	8067751	8067752	8067753	
			4A	PVC	BK		AL-ZWKP4-L/P01BK	8082056	8082057	8082058	
			4A	PVC	GY		AL-ZWKP4-L/P00	8052714	8052715	8052716	
			4A	PVC	GY		AL-ZWKP4-L/P01	8052742	8052743	8052744	
5	30V	3A	PUR	BK		AL-ZWKP4.5-L/S370	8050028	8050029	8050030		
		3A	PUR	BK		AL-ZWKP4.5-L/S400	8075226	8075227	8075429		
		3A	PVC	GY		AL-ZWKP4.5-L/P00	8049769	8050011	8050012		
 Single-ended cordset male, straight, Ø8mm snap	3	60V	4A	PUR	BK		AL-SP3-L/S370	8051905	8051906	8051907	
			4A	PUR	BK		AL-SP3-L/S400	8075166	8075167	8075411	
			4A	PUR	GY		AL-SP3-L/S370GY	8059164	8059165	8059166	
			4A	PUR	OG		AL-SP3-L/S7400	8059167	8059168	8059169	
			4A	PVC	BK		AL-SP3-L/P01BK	8082016	8082017	8082018	
			4A	PVC	GY		AL-SP3-L/P00	8052496	8052497	8052498	
			4A	PVC	GY		AL-SP3-L/P01	8052499	8052500	8052501	
	4	60V	4A	PUR	BK		AL-SP4-L/S370	8052674	8052675	8052676	
			4A	PUR	BK		AL-SP4-L/S400	8075184	8075185	8075419	
			4A	PUR	GY		AL-SP4-L/S370GY	8067972	8067973	8067978	
			4A	PUR	OG		AL-SP4-L/S7400	8067705	8067706	8067707	
			4A	PVC	BK		AL-SP4-L/P01BK	8082040	8082041	8082042	
			4A	PVC	GY		AL-SP4-L/P00	8052699	8052700	8052701	
			4A	PVC	GY		AL-SP4-L/P01	8052727	8052728	8052729	
5	30V	3A	PUR	BK		AL-SP4.5-L/S370	8050013	8050014	8050015		
		3A	PUR	BK		AL-SP4.5-L/S400	8075204	8075205	8075425		
		3A	PVC	GY		AL-SP4.5-L/P00	8050000	8050001	8050002		

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.


		Body				Cable			L = cable length*			
		Pins	U[max]	I[max]	LED	Material	Color	UL	Item description			
									2m / 1m	5m / 2m	10m / 5m	
	Single-ended cordset male, angled, Ø8mm snap	3	60V	4A		PUR	BK		AL-WSP3-L/S370	8051908	8051909	8051910
				4A		PUR	BK		AL-WSP3-L/S400	8075172	8075173	8075414
				4A		PUR	GY		AL-WSP3-L/S370GY	8059170	8059171	8059172
				4A		PUR	OG		AL-WSP3-L/S7400	8059173	8059174	8059175
				4A		PVC	BK		AL-WSP3-L/P01BK	8082019	8082020	8082021
				4A		PVC	GY		AL-WSP3-L/P00	8052502	8052503	8052504
				4A		PVC	GY		AL-WSP3-L/P01	8052505	8052506	8052507
		4	60V	4A		PUR	BK		AL-WSP4-L/S370	8052677	8052678	8052679
				4A		PUR	BK		AL-WSP4-L/S400	8075190	8075191	8075421
				4A		PUR	GY		AL-WSP4-L/S370GY	8068011	8068012	8068014
				4A		PUR	OG		AL-WSP4-L/S7400	8067711	8067712	8067713
				4A		PVC	BK		AL-WSP4-L/P01BK	8082043	8082044	8082045
				4A		PVC	GY		AL-WSP4-L/P00	8052702	8052703	8052704
				4A		PVC	GY		AL-WSP4-L/P01	8052730	8052731	8052732
5	30V	3A		PUR	BK		AL-WSP4.5-L/S370	8050019	8050020	8050021		
		3A		PUR	BK		AL-WSP4.5-L/S400	8075212	8075213	8075427		
		3A		PVC	GY		AL-WSP4.5-L/P00	8043900	8050003	8050004		
 	Double-ended cordset female, straight, Ø8mm snap male, straight, Ø8mm snap	3	60V	4A		PUR	BK		AL-KP3-L-AL-SP3/S370	8073042	8073043	8071534
				4A		PUR	GY		AL-KP3-L-AL-SP3/S370GY	8075777	8075778	8075779
				4A		PUR	OG		AL-KP3-L-AL-SP3/S7400	8070025	8075725	8062204
				4A		PVC	GY		AL-KP3-L-AL-SP3/P00	8061414	8057497	8075724
		4	60V	4A		PUR	BK		AL-KP4-L-AL-SP4/S370	8059299	8053638	8044452
				4A		PUR	GY		AL-KP4-L-AL-SP4/S370GY	8075793	8075794	8075795
				4A		PUR	OG		AL-KP4-L-AL-SP4/S7400	8075790	8075791	8075792
				4A		PVC	GY		AL-KP4-L-AL-SP4/P00	8075728	8075729	8068882
		5	30V	3A		PUR	BK		AL-KP4.5-L-AL-SP4.5/S370	8052970	8052971	8052972
				3A		PVC	GY		AL-KP4.5-L-AL-SP4.5/P00	8052958	8052959	8052960
 	Double-ended cordset female, straight, Ø8mm snap male, straight, Ø8mm snap Wire cross-section 3x0.14mm <sup>2</sup> + 2x0.34mm <sup>2</sup>	5	30V	3A		PUR	BK		AL-KP4.5-L-AL-SP4.5/S570/S320	8088631	8088244	8088894
 	Double-ended cordset female, straight, Ø8mm snap male, straight, Ø8mm snap Pinout 4.028	4	60V	4A		PUR	BK		AL-KP4.028-L-AL-SP3/S370	8087314	8086579	8086580

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.



		Body				Cable			Item description	L = cable length*		
		Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
	Double-ended cordset female, angled, Ø8mm snap male, straight, Ø 8mm snap	3	60V	4A		PUR	BK		AL-WKP3-L-AL-SP3/S370	8063830	8056384	8075727
				4A		PUR	GY		AL-WKP3-L-AL-SP3/S370GY	8075787	8075788	8075789
				4A		PUR	OG		AL-WKP3-L-AL-SP3/S7400	8075784	8075785	8075786
				4A		PVC	GY		AL-WKP3-L-AL-SP3/P00	8075781	8075782	8075783
		4	60V	4A		PUR	BK		AL-WKP4-L-AL-SP4/S370	8076453	8076454	8076455
				4A		PUR	GY		AL-WKP4-L-AL-SP4/S370GY	8075802	8075803	8075804
				4A		PUR	OG		AL-WKP4-L-AL-SP4/S7400	8075799	8075800	8075801
				4A		PVC	GY		AL-WKP4-L-AL-SP4/P00	8075796	8075797	8075798
5	30V	3A		PUR	BK		AL-WKP4.5-L-AL-SP4.5/S370	8052979	8052980	8052981		
		3A		PVC	GY		AL-WKP4.5-L-AL-SP4.5/P00	8052967	8052968	8052969		
	Double-ended cordset female, straight, Ø8mm snap male, straight, M12 Wire cross-section 3x0.14mm <sup>2</sup> + 2x0.34mm <sup>2</sup>	5	30V	3A		PUR	BK		AL-KP4.5-L-AL-WAS4.5/S570/S320	8070120	8070121	8088895


\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.
 <p>Sensor/actuator female, straight, M12 Front wall-mounting Wire contact</p>	3	A	250V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12EKUA3-0,5/M16	8082880	
									PG9	AL-FVM12EKUA3-0,5/PG9	8082892	
									Metal, CuZn, nickel-plated	M12x1	AL-FVM12KUA3-0,5/M12	8071727
										M16x1.5	AL-FVM12KUA3-0,5/M16	8071679
										PG9	AL-FVM12KUA3-0,5/PG9	8072461
										4	A	250V
	PG9	AL-FVM12EKUA4-0,5/PG9	8082893									
	Metal, CuZn, nickel-plated	M12x1	AL-FVM12KUA4-0,5/M12	8071730								
		M16x1.5	AL-FVM12KUA4-0,5/M16	8071682								
		PG9	AL-FVM12KUA4-0,5/PG9	8072462								
		4+PE	A	60V	4 A	•	0.50		Stainless steel 1.4404			
	PG9									AL-FVM12EKUA5-0,5/PG9	8082899	
Metal, CuZn, nickel-plated	M12x1									AL-FVM12KUA5-0,5/M12	8071738	
	M16x1.5									AL-FVM12KUA5-0,5/M16	8071693	
	PG9									AL-FVM12KUA5-0,5/PG9	8072467	
	5									A	60V	4 A
PG9		AL-FVM12EKUA4.5-0,5/PG9	8082897									
Metal, CuZn, nickel-plated		M12x1	AL-FVM12KUA4.5-0,5/M12	8071734								
		M16x1.5	AL-FVM12KUA4.5-0,5/M16	8071691								
		PG9	AL-FVM12KUA4.5-0,5/PG9	8072465								
		8	A	30V	2 A	•	0.50		Stainless steel 1.4404			
PG9	AL-FVM12EKUA8-0,5/PG9									8082906		
Metal, CuZn, nickel-plated	M12x1									AL-FVM12KUA8-0,5/M12	8071740	
	M16x1.5									AL-FVM12KUA8-0,5/M16	8071695	
	PG9									AL-FVM12KUA8-0,5/PG9	8072469	
	12									A	30V	1.5 A
PG9		AL-FVM12EKUA12-0,5/PG9	8082907									
Metal, CuZn, nickel-plated		M12x1	AL-FVM12KUA12-0,5/M12	8071742								
		M16x1.5	AL-FVM12KUA12-0,5/M16	8071696								
		PG9	AL-FVM12KUA12-0,5/PG9	8072470								



Sensor/actuator  
female, straight, M12  
Front wall-mounting, position-  
able  
Wire contact


Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.
3	A	250V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12EKUA3-0,5/M16/S520	8082908
							Metal, CuZn, nickel-plated	M16x1.5	AL-FVM12KUA3-0,5/M16/S520	8077913
							PG9	AL-FVM12KUA3-0,5/PG9/S520	8077917	
4	A	250V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12EKUA4-0,5/M16/S520	8082909
							Metal, CuZn, nickel-plated	M16x1.5	AL-FVM12KUA4-0,5/M16/S520	8077902
							PG9	AL-FVM12KUA4-0,5/PG9/S520	8077918	
4+PE	A	60V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12EKUA5-0,5/M16/S520	8082915
							Metal, CuZn, nickel-plated	M16x1.5	AL-FVM12KUA5-0,5/M16/S520	8077908
							PG9	AL-FVM12KUA5-0,5/PG9/S520	8077924	
5	A	60V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12EKUA4.5-0,5/M16/S520	8082913
							Metal, CuZn, nickel-plated	M16x1.5	AL-FVM12KUA4.5-0,5/M16/S520	8077906
							PG9	AL-FVM12KUA4.5-0,5/PG9/S520	8077922	
8	A	30V	2 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12EKUA8-0,5/M16/S520	8082918
							Metal, CuZn, nickel-plated	M16x1.5	AL-FVM12KUA8-0,5/M16/S520	8077911
							PG9	AL-FVM12KUA8-0,5/PG9/S520	8077927	
12	A	30V	1.5 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12EKUA12-0,5/M16/S520	8082919
							Metal, CuZn, nickel-plated	M16x1.5	AL-FVM12KUA12-0,5/M16/S520	8077912
							PG9	AL-FVM12KUA12-0,5/PG9/S520	8077928	

		Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.
 <p>Sensor/actuator male, straight, M12 Front wall-mounting Wire contact</p>	3	A	250V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12ESUA3-0,5/M16	8082990	
									PG9	AL-FVM12ESUA3-0,5/PG9	8083002	
									Metal, CuZn, nickel-plated	M12x1	AL-FVM12SUA3-0,5/M12	8071831
										M16x1.5	AL-FVM12SUA3-0,5/M16	8071801
										PG9	AL-FVM12SUA3-0,5/PG9	8072486
									4	A	250V	4 A
	PG9	AL-FVM12ESUA4-0,5/PG9	8083019									
	Metal, CuZn, nickel-plated	M12x1	AL-FVM12SUA4-0,5/M12	8071832								
		M16x1.5	AL-FVM12SUA4-0,5/M16	8071802								
		PG9	AL-FVM12SUA4-0,5/PG9	8072487								
	4+PE	A	60V	4 A	•	0.50		Stainless steel 1.4404				
									PG9	AL-FVM12ESUA5-0,5/PG9	8083026	
Metal, CuZn, nickel-plated									M12x1	AL-FVM12SUA5-0,5/M12	8071837	
									M16x1.5	AL-FVM12SUA5-0,5/M16	8071808	
									PG9	AL-FVM12SUA5-0,5/PG9	8072492	
5									A	60V	4 A	•
	PG9	AL-FVM12ESUA4.5-0,5/PG9	8083023									
	Metal, CuZn, nickel-plated	M12x1	AL-FVM12SUA4.5-0,5/M12	8071835								
		M16x1.5	AL-FVM12SUA4.5-0,5/M16	8071805								
		PG9	AL-FVM12SUA4.5-0,5/PG9	8072490								
	8	A	30V	2 A	•	0.50		Stainless steel 1.4404				
PG9									AL-FVM12ESUA8-0,5/PG9	8083028		
Metal, CuZn, nickel-plated									M12x1	AL-FVM12SUA8-0,5/M12	8071839	
									M16x1.5	AL-FVM12SUA8-0,5/M16	8071810	
									PG9	AL-FVM12SUA8-0,5/PG9	8072494	
12									A	30V	1.5 A	•
	PG9	AL-FVM12ESUA12-0,5/PG9	8083029									
	Metal, CuZn, nickel-plated	M12x1	AL-FVM12SUA12-0,5/M12	8071840								
		M16x1.5	AL-FVM12SUA12-0,5/M16	8071811								
		PG9	AL-FVM12SUA12-0,5/PG9	8072495								



Sensor/actuator  
male, straight, M12  
Front wall-mounting, position-  
able  
Wire contact

Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.
3	A	250V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12ESUA3-0,5/M16/S520	8083030
							Metal, CuZn, nickel-plated	M16x1.5	AL-FVM12SUA3-0,5/M16/S520	8077964
							PG9	AL-FVM12SUA3-0,5/PG9/S520	8078052	
4	A	250V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12ESUA4-0,5/M16/S520	8083031
							Metal, CuZn, nickel-plated	M16x1.5	AL-FVM12SUA4-0,5/M16/S520	8077965
							PG9	AL-FVM12SUA4-0,5/PG9/S520	8078053	
4+PE	A	60V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12ESUA5-0,5/M16/S520	8083038
							Metal, CuZn, nickel-plated	M16x1.5	AL-FVM12SUA5-0,5/M16/S520	8077972
							PG9	AL-FVM12SUA5-0,5/PG9/S520	8078060	
5	A	60V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12ESUA4.5-0,5/M16/S520	8083035
							Metal, CuZn, nickel-plated	M16x1.5	AL-FVM12SUA4.5-0,5/M16/S520	8077969
							PG9	AL-FVM12SUA4.5-0,5/PG9/S520	8078057	
8	A	30V	2 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12ESUA8-0,5/M16/S520	8083040
							Metal, CuZn, nickel-plated	M16x1.5	AL-FVM12SUA8-0,5/M16/S520	8077974
							PG9	AL-FVM12SUA8-0,5/PG9/S520	8078062	
12	A	30V	1.5 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12ESUA12-0,5/M16/S520	8083041
							Metal, CuZn, nickel-plated	M16x1.5	AL-FVM12SUA12-0,5/M16/S520	8077975
							PG9	AL-FVM12SUA12-0,5/PG9/S520	8078063	

		Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.
 Sensor/actuator female, straight, M12 Back wall-mounting Wire contact	3	A	250V	4 A	•	0.50			Metal, CuZn, nickel-plated	PG9	AL-FHM12KUA3-0,5/PG9	8072450
									Stainless steel 1.4404	M16x1.5	AL-FHM12EKUA3-0,5/M16	8082719
									Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KUA3-0,5/M16	8071533
								1,0...2,5	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA3-0,5/M12/S3525	8076756
								2,5...4,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA3-0,5/M12/S3540	8076742
				4,0...5,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA3-0,5/M12/S3550	8071705				
	4	A	250V	4 A	•	0.50			Stainless steel 1.4404	M16x1.5	AL-FHM12EKUA4-0,5/M16	8082720
									Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KUA4-0,5/M16	8071536
									Metal, CuZn, nickel-plated	PG9	AL-FHM12KUA4-0,5/PG9	8072451
								1,0...2,5	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA4-0,5/M12/S3525	8076795
								2,5...4,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA4-0,5/M12/S3540	8076794
				4,0...5,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA4-0,5/M12/S3550	8071707				
	4+PE	A	60V	4 A	•	0.50			Stainless steel 1.4404	M16x1.5	AL-FHM12EKUA5-0,5/M16	8082726
									Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KUA5-0,5/M16	8071666
									Metal, CuZn, nickel-plated	PG9	AL-FHM12KUA5-0,5/PG9	8072456
								1,0...2,5	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA5-0,5/M12/S3525	8076808
								2,5...4,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA5-0,5/M12/S3540	8076807
				4,0...5,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA5-0,5/M12/S3550	8071713				
	5	A	60V	4 A	•	0.50			Metal, CuZn, nickel-plated	PG9	AL-FHM12KUA4.5-0,5/PG9	8072454
									Stainless steel 1.4404	M16x1.5	AL-FHM12EKUA4.5-0,5/M16	8082724
								Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KUA4.5-0,5/M16	8071540	
1,0...2,5								Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA4.5-0,5/M12/S3525	8076801	
2,5...4,0								Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA4.5-0,5/M12/S3540	8076800	
			4,0...5,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA4.5-0,5/M12/S3550	8071711					
8	A	30V	2 A	•	0.50			Stainless steel 1.4404	M16x1.5	AL-FHM12EKUA8-0,5/M16	8082729	
								Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KUA8-0,5/M16	8071668	
								Metal, CuZn, nickel-plated	PG9	AL-FHM12KUA8-0,5/PG9	8072458	
							1,0...2,5	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA8-0,5/M12/S3525	8076825	
							2,5...4,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA8-0,5/M12/S3540	8076824	
			4,0...5,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA8-0,5/M12/S3550	8071716					
12	A	30V	1.5 A	•	0.50			Stainless steel 1.4404	M16x1.5	AL-FHM12EKUA12-0,5/M16	8082730	
								Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KUA12-0,5/M16	8071669	
								Metal, CuZn, nickel-plated	PG9	AL-FHM12KUA12-0,5/PG9	8072459	
							1,0...2,5	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA12-0,5/M12/S3525	8076827	
							2,5...4,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA12-0,5/M12/S3540	8076826	
			4,0...5,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA12-0,5/M12/S3550	8071718					



Sensor/actuator  
female, straight, M12  
Back wall-mounting  
Print contact

Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.	
3	A	250V	4 A	•			Stainless steel 1.4404	M16x1.5	AL-FHM12EKUA3-P/M16	8084910	
							Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KUA3-P/M16	8072160	
								PG9	AL-FHM12KUA3-P/PG9	8072173	
							1,0...2,5	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA3-P/M12/S3525	8076558
							2,5...4,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA3-P/M12/S3540	8076557
							4,0...5,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA3-P/M12/S3550	8072202
							4	A	250V	4 A	•
Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KUA4-P/M16	8072162								
	PG9	AL-FHM12KUA4-P/PG9	8072174								
1,0...2,5	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA4-P/M12/S3525	8076560							
2,5...4,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA4-P/M12/S3540	8076559							
4,0...5,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA4-P/M12/S3550	8072203							
4+PE	A	60V	4 A	•							
							Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KUA5-P/M16	8072168	
								PG9	AL-FHM12KUA5-P/PG9	8072177	
							1,0...2,5	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA5-P/M12/S3525	8076566
							2,5...4,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA5-P/M12/S3540	8076565
							4,0...5,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA5-P/M12/S3550	8072206
							8	A	30V	2 A	•
Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KUA8-P/M16	8072170								
	PG9	AL-FHM12KUA8-P/PG9	8072179								
1,0...2,5	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA8-P/M12/S3525	8076570							
2,5...4,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA8-P/M12/S3540	8076569							
4,0...5,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA8-P/M12/S3550	8072208							
12	A	30V	1.5 A	•							
							Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KUA12-P/M16	8072171	
								PG9	AL-FHM12KUA12-P/PG9	8072180	
							1,0...2,5	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA12-P/M12/S3525	8076572
							2,5...4,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA12-P/M12/S3540	8076571
							4,0...5,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA12-P/M12/S3550	8072209



Sensor/actuator female, straight, M12  
Back wall-mounting  
Print contact shielded


Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.
3	A	250V	4 A	•			Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KSA3-P/M16	8072214
								PG9	AL-FHM12KSA3-P/PG9	8072239
4	A	250V	4 A	•			Metal, CuZn, nickel-plated	PG9	AL-FHM12KSA4-P/PG9	8072240
								M16x1.5	AL-FHM12KSA4-P/M16	8072215
4+PE	A	60V	4 A	•			Metal, CuZn, nickel-plated	PG9	AL-FHM12KSA5-P/PG9	8072243
								M16x1.5	AL-FHM12KSA5-P/M16	8072218
8	A	30V	2 A	•			Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KSA8-P/M16	8088765
								PG9	AL-FHM12KSA8-P/PG9	8088766
12	A	30V	1.5 A	•			Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KSA12-P/M16	8088767
								PG9	AL-FHM12KSA12-P/PG9	8088768













Sensor/actuator male, straight, M12  
Back wall-mounting  
Wire contact

3	A	250V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FHM12ESUA3-0,5/M16	8082977
							Metal, CuZn, nickel-plated	M12x1	AL-FHM12SUA3-0,5/M12	8071819
								M16x1.5	AL-FHM12SUA3-0,5/M16	8071790
								PG9	AL-FHM12SUA3-0,5/PG9	8072475
4	A	250V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FHM12ESUA4-0,5/M16	8082978
							Metal, CuZn, nickel-plated	M12x1	AL-FHM12SUA4-0,5/M12	8071820
								M16x1.5	AL-FHM12SUA4-0,5/M16	8071791
								PG9	AL-FHM12SUA4-0,5/PG9	8072476
4+PE	A	60V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FHM12ESUA5-0,5/M16	8082985
							Metal, CuZn, nickel-plated	M12x1	AL-FHM12SUA5-0,5/M12	8071825
								M16x1.5	AL-FHM12SUA5-0,5/M16	8071796
								PG9	AL-FHM12SUA5-0,5/PG9	8072481
5	A	60V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FHM12ESUA4.5-0,5/M16	8082982
							Metal, CuZn, nickel-plated	M12x1	AL-FHM12SUA4.5-0,5/M12	8071823
								M16x1.5	AL-FHM12SUA4.5-0,5/M16	8071794
								PG9	AL-FHM12SUA4.5-0,5/PG9	8072479
8	A	30V	2 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FHM12ESUA8-0,5/M16	8082987
							Metal, CuZn, nickel-plated	M12x1	AL-FHM12SUA8-0,5/M12	8071827
								M16x1.5	AL-FHM12SUA8-0,5/M16	8071799
								PG9	AL-FHM12SUA8-0,5/PG9	8072483
12	A	30V	1.5 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FHM12ESUA12-0,5/M16	8082988
							Metal, CuZn, nickel-plated	M12x1	AL-FHM12SUA12-0,5/M12	8071829
								M16x1.5	AL-FHM12SUA12-0,5/M16	8071800
								PG9	AL-FHM12SUA12-0,5/PG9	8072484




		Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.			
	Sensor/actuator male, straight, M12 Back wall-mounting Print contact	3	A	250V	4 A	•			Stainless steel 1.4404	M16x1.5	AL-FHM12ESUA3-P/M16	8084962			
									Metal, CuZn, nickel-plated	M12x1	AL-FHM12SUA3-P/M12	8072370			
									M16x1.5	AL-FHM12SUA3-P/M16	8072348				
				4	A	250V	4 A	•			PG9	AL-FHM12SUA3-P/PG9	8072360		
		Stainless steel 1.4404	M16x1.5								AL-FHM12ESUA4-P/M16	8084963			
		Metal, CuZn, nickel-plated	M12x1								AL-FHM12SUA4-P/M12	8072371			
						4+PE	A	60V	4 A	•			M16x1.5	AL-FHM12SUA4-P/M16	8072349
		Stainless steel 1.4404	M16x1.5	AL-FHM12ESUA5-P/M16	8084991										
		Metal, CuZn, nickel-plated	M12x1	AL-FHM12SUA5-P/M12	8072376										
						5	A	60V	4 A	•			M16x1.5	AL-FHM12SUA5-P/M16	8072354
		Stainless steel 1.4404	M16x1.5	AL-FHM12ESUA4.5-P/M16	8084970										
		Metal, CuZn, nickel-plated	M12x1	AL-FHM12SUA4.5-P/M12	8072374										
				8	A	30V	2 A	•			M16x1.5	AL-FHM12SUA4.5-P/M16	8072352		
Stainless steel 1.4404	M16x1.5	AL-FHM12ESUA8-P/M16	8084994												
Metal, CuZn, nickel-plated	M12x1	AL-FHM12SUA8-P/M12	8072378												
				12	A	30V	1.5 A	•			M16x1.5	AL-FHM12SUA8-P/M16	8072356		
Stainless steel 1.4404	M16x1.5	AL-FHM12ESUA4.5-P/PG9	8072364												
Metal, CuZn, nickel-plated	M12x1	AL-FHM12SUA4.5-P/M12	8072374												
				12	A	30V	1.5 A	•			M16x1.5	AL-FHM12SUA8-P/PG9	8072368		
Stainless steel 1.4404	M16x1.5	AL-FHM12ESUA12-P/M16	8085002												
Metal, CuZn, nickel-plated	M12x1	AL-FHM12SUA12-P/M12	8072379												
				3	A	250V	4 A	•			M16x1.5	AL-FHM12SUA12-P/M16	8072357		
Stainless steel 1.4404	M16x1.5	AL-FHM12ESUA12-P/PG9	8072369												
Metal, CuZn, nickel-plated	M12x1	AL-FHM12SUA12-P/M12	8072379												
				3	A	250V	4 A	•			M16x1.5	AL-FHM12SSA3-P/M16	8072380		
Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12SSA3-P/M16	8072380												
				4	A	250V	4 A	•			PG9	AL-FHM12SSA3-P/PG9	8072388		
Metal, CuZn, nickel-plated	PG9	AL-FHM12SSA3-P/PG9	8072388												
				4	A	250V	4 A	•			M16x1.5	AL-FHM12SSA4-P/M16	8072381		
Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12SSA4-P/M16	8072381												
				4+PE	A	60V	4 A	•			PG9	AL-FHM12SSA4-P/PG9	8072389		
Metal, CuZn, nickel-plated	PG9	AL-FHM12SSA4-P/PG9	8072389												
				4+PE	A	60V	4 A	•			M16x1.5	AL-FHM12SSA5-P/M16	8072386		
Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12SSA5-P/M16	8072386												
				5	A	60V	4 A	•			PG9	AL-FHM12SSA5-P/PG9	8072394		
Metal, CuZn, nickel-plated	PG9	AL-FHM12SSA5-P/PG9	8072394												
				5	A	60V	4 A	•			M16x1.5	AL-FHM12SSA4.5-P/M16	8072384		
Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12SSA4.5-P/M16	8072384												
				8	A	30V	2 A	•			PG9	AL-FHM12SSA4.5-P/PG9	8072392		
Metal, CuZn, nickel-plated	PG9	AL-FHM12SSA4.5-P/PG9	8072392												
				8	A	30V	2 A	•			M16x1.5	AL-FHM12SSA8-P/M16	8088769		
Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12SSA8-P/M16	8088769												
				12	A	30V	1.5 A	•			PG9	AL-FHM12SSA8-P/PG9	8088770		
Metal, CuZn, nickel-plated	PG9	AL-FHM12SSA8-P/PG9	8088770												
				12	A	30V	1.5 A	•			M16x1.5	AL-FHM12SSA12-P/M16	8088771		
Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12SSA12-P/M16	8088771												
				12	A	30V	1.5 A	•			PG9	AL-FHM12SSA12-P/PG9	8088772		
Metal, CuZn, nickel-plated	PG9	AL-FHM12SSA12-P/PG9	8088772												


		Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.	
	Sensor/actuator female, straight, M8 Front wall-mounting Wire contact	3	A	60V	4 A	•	0.20	2,0...5,0	Stainless steel 1.4404	M8x0,5	AL-FVM8EKUA3-0,2/M8	8084376	
									Metal, CuZn, nickel-plated	M8x0,5	AL-FVM8KUA3-0,2/M8	8071345	
		4	A	60V	4 A	•	0.20	2,0...5,0	Stainless steel 1.4404	M8x0,5	AL-FVM8EKUA4-0,2/M8	8084377	
									Metal, CuZn, nickel-plated	M8x0,5	AL-FVM8KUA4-0,2/M8	8071346	
		5	B	30V	3 A	•	0.20	2,0...5,0	Stainless steel 1.4404	M8x0,5	AL-FVM8EKUB4.5-0,2/M8	8084378	
									Metal, CuZn, nickel-plated	M8x0,5	AL-FVM8KUB4.5-0,2/M8	8071347	
	Sensor/actuator male, straight, M8 Front wall-mounting Wire contact	3	A	60V	4 A	•	0.20	2,0...5,0	Stainless steel 1.4404	M8x0,5	AL-FVM8ESUA3-0,2/M8	8084382	
									Metal, CuZn, nickel-plated	M8x0,5	AL-FVM8SUA3-0,2/M8	8071417	
		4	A	60V	4 A	•	0.20	2,0...5,0	Stainless steel 1.4404	M8x0,5	AL-FVM8ESUA4-0,2/M8	8084383	
									Metal, CuZn, nickel-plated	M8x0,5	AL-FVM8SUA4-0,2/M8	8071419	
		5	B	30V	3 A	•	0.20	2,0...5,0	Stainless steel 1.4404	M8x0,5	AL-FVM8ESUB4.5-0,2/M8	8084384	
									Metal, CuZn, nickel-plated	M8x0,5	AL-FVM8SUB4.5-0,2/M8	8071420	
	Sensor/actuator female, straight, M8 Back wall-mounting Wire contact	3	A	60V	4 A	•	0.20	3,0...6,0	Stainless steel 1.4404	M10x1	AL-FHM8EKUA3-0,2/M10	8084379	
									Metal, CuZn, nickel-plated	M10x1	AL-FHM8KUA3-0,2/M10	8071402	
		4	A	60V	4 A	•	0.20	3,0...6,0	Stainless steel 1.4404	M10x1	AL-FHM8EKUA4-0,2/M10	8084380	
									Metal, CuZn, nickel-plated	M10x1	AL-FHM8KUA4-0,2/M10	8071405	
		5	B	30V	3 A	•	0.20	3,0...6,0	Stainless steel 1.4404	M10x1	AL-FHM8EKUB4.5-0,2/M10	8084381	
									Metal, CuZn, nickel-plated	M10x1	AL-FHM8KUB4.5-0,2/M10	8071406	
	Sensor/actuator male, straight, M8 Back wall-mounting Wire contact	3	A	60V	4 A	•	0.20	2,0...4,5	Stainless steel 1.4404	M8x1	AL-FHM8ESUA3-0,2/M8	8084385	
									Metal, CuZn, nickel-plated	M8x1	AL-FHM8SUA3-0,2/M8	8071421	
		4	A	60V	4 A	•	0.20	2,0...4,5	Stainless steel 1.4404	M8x1	AL-FHM8ESUA4-0,2/M8	8084386	
									Metal, CuZn, nickel-plated	M8x1	AL-FHM8SUA4-0,2/M8	8071422	
		5	B	30V	3 A	•	0.20	2,0...4,5	Stainless steel 1.4404	M8x1	AL-FHM8ESUB4.5-0,2/M8	8084387	
									Metal, CuZn, nickel-plated	M8x1	AL-FHM8SUB4.5-0,2/M8	8071423	
	Sensor/actuator female, straight, M8 Back wall-mounting Print contact	3	A	60V	4 A	•		3,0...6,0	Stainless steel 1.4404	M10x1	AL-FHM8EKUA3-P/M10	8084388	
									Metal, CuZn, nickel-plated	M10x1	AL-FHM8KUA3-P/M10	8073385	
		4	A	60V	4 A	•			3,0...6,0	Stainless steel 1.4404	M10x1	AL-FHM8EKUA4-P/M10	8084389
										Metal, CuZn, nickel-plated	M10x1	AL-FHM8KUA4-P/M10	8073386
		5	B	30V	3 A	•			3,0...6,0	Stainless steel 1.4404	M10x1	AL-FHM8EKUB4.5-P/M10	8084390
										Metal, CuZn, nickel-plated	M10x1	AL-FHM8KUB4.5-P/M10	8073387
	Sensor/actuator male, straight, M8 Back wall-mounting Print contact	3	A	60V	4 A	•		2,0...4,5	Stainless steel 1.4404	M8x1	AL-FHM8ESUA3-P/M8	8084391	
									Metal, CuZn, nickel-plated	M8x1	AL-FHM8SUA3-P/M8	8073397	
		4	A	60V	4 A	•			2,0...4,5	Stainless steel 1.4404	M8x1	AL-FHM8ESUA4-P/M8	8084392
										Metal, CuZn, nickel-plated	M8x1	AL-FHM8SUA4-P/M8	8073398
		5	B	30V	3 A	•			2,0...4,5	Stainless steel 1.4404	M8x1	AL-FHM8ESUB4.5-P/M8	8084393
										Metal, CuZn, nickel-plated	M8x1	AL-FHM8SUB4.5-P/M8	8073399

		Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.
	Sensor/actuator female, straight, M8 Back wall-mounting Print contact shielded	3	A	60V	4 A	•			Metal, CuZn, nickel-plated	M10x1	AL-FHM8KSA3-P/M10	8073389
		4	A	60V	4 A	•			Metal, CuZn, nickel-plated	M10x1	AL-FHM8KSA4-P/M10	8073390
		5	B	30V	3 A	•			Metal, CuZn, nickel-plated	M10x1	AL-FHM8KSB4.5-P/M10	8073391
	Sensor/actuator male, straight, M8 Back wall-mounting Print contact shielded	3	A	60V	4 A	•			Metal, CuZn, nickel-plated	M8x1	AL-FHM8SSA3-P/M8	8073400
		4	A	60V	4 A	•			Metal, CuZn, nickel-plated	M8x1	AL-FHM8SSA4-P/M8	8073401
		5	B	30V	3 A	•			Metal, CuZn, nickel-plated	M8x1	AL-FHM8SSB4.5-P/M8	8073402
	Sensor/actuator female, angled, M8 Back wall-mounting Print contact shielded	3	A	60V	4 A	•			Metal, CuZn, nickel-plated	M10x1	AL-WFHM8KSA3-P/M10	8088510
		4	A	60V	4 A	•			Metal, CuZn, nickel-plated	M10x1	AL-WFHM8KSA4-P/M10	8088511
		5	B	30V	3 A	•			Metal, CuZn, nickel-plated	M10x1	AL-WFHM8KSB4.5-P/M10	8088512
	Sensor/actuator male, angled, M8 Back wall-mounting Print contact shielded	3	A	60V	4 A	•			Metal, CuZn, nickel-plated	M8x1	AL-WFHM8SSA3-P/M8	8088515
		4	A	60V	4 A	•			Metal, CuZn, nickel-plated	M8x1	AL-WFHM8SSA4-P/M8	8088516
		5	B	30V	3 A	•			Metal, CuZn, nickel-plated	M8x1	AL-WFHM8SSB4.5-P/M8	8088517

Nomenclature of patched connectors

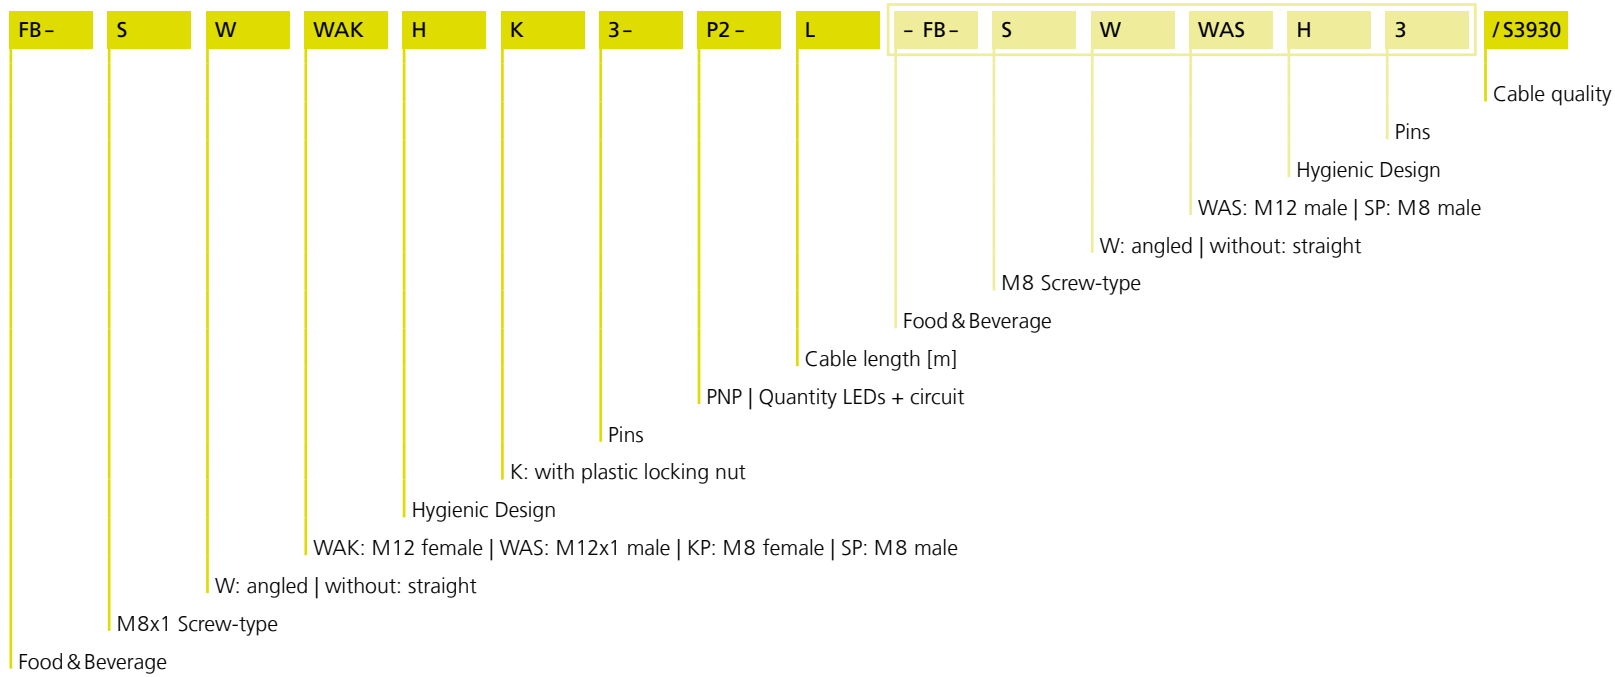

Cable	Material	UL	Colour	Feature
P00	PVC/PVC		GY	
P01	PVC/PVC	✓	GY	
S3930	TPE/TPE		GY	FDA-approved materials, good microbes- and chemical resistant

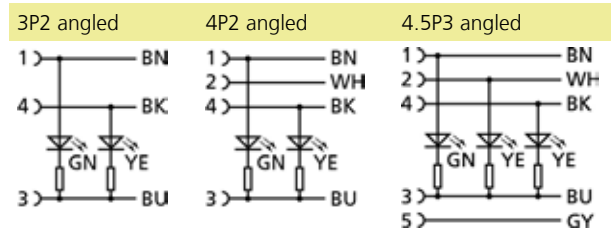







\*see flyer "Plastic locking nut for Food & Beverage"







## Food & Beverage

Technical data	M12	M8	Receptacles	Field-wireable
Insulation resistance	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$
Resistance	$\leq 5 m\Omega$	$\leq 5 m\Omega$	$\leq 5 m\Omega$	$\leq 5 m\Omega$
Ambient temperature product	-40°C...+105°C	-40°C...+105°C	-40°C...+105°C	-40°C...+85°C
Contact material	Metal, gold-plated	Metal, gold-plated	Metal, gold-plated	Metal, gold-plated
Contact-carrier material	Plastic, PP	Plastic, PP	Plastic, PP	Plastic, PA
Grip body material	Plastic, PP	Plastic, PP		Zinc die-cast, nickel-plated
Coupling nut material	Stainless steel, V4A	Stainless steel, V4A	Stainless steel, V4A	Stainless steel, V4A
Sealing (female) material	EPDM	EPDM	FPM/FKM	
Material of external sealing			EPDM	
Receptacle housing material			V4A	
Standards	IEC 61076-2-101	IEC 61076-2-104	IEC 61076-2-101	IEC 61076-2-101
Degree of protection (mounted)	IP65, IP67, IP68, IP69	IP65, IP67, IP68, IP69	IP65, IP67, IP68, IP69	IP67
Mechanical life-cycle	>100 mating cycles	>100 mating cycles	>100 mating cycles	>100 mating cycles
Degree of pollution	3	3/2	3	3
Cable outlet				4..6 mm
Connecting cross-section				max. 0,75 mm <sup>2</sup>

Our Food&Beverage connectors in 'Hygienic Design' refer to EHEDG directives. FDA-compliant materials guarantee a high resistance to sour and alkaline cleaning- and disinfectant agents. All M8- and M12-components are dust- and water-proof as well as protected against water with high pressure and steam-jet cleaning (IP65, IP67, IP68 and IP69). With PVC and TPE we offer the right cable qualities for your application.







Our new and cost-effective alternative to stainless steel: Temperature- and media resistant M12 plastic locking nuts.

		Body				Cable			Item description	L = cable length*		
		Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
	Single-ended cordset female, straight, M12	3	250V	4A		PVC	GY		FB-WAKH3-L/P00	8063805	8063806	8063807
				4A		PVC	GY		FB-WAKH3-L/P01	8063748	8063749	8063752
				4A		TPE	GY		FB-WAKH3-L/S3930	8050462	8058555	8058556
		4	250V	4A		PVC	GY		FB-WAKH4-L/P00	8063811	8063812	8063813
				4A		PVC	GY		FB-WAKH4-L/P01	8063724	8063725	8063728
				4A		TPE	GY		FB-WAKH4-L/S3930	8050464	8058557	8058558
		5	60V	4A		PVC	GY		FB-WAKH4.5-L/P00	8063817	8063818	8063819
				4A		PVC	GY		FB-WAKH4.5-L/P01	8063739	8063740	8063741
				4A		TPE	GY		FB-WAKH4.5-L/S3930	8063882	8063883	8063884
	Single-ended cordset female, angled, M12	3	250V	4A		PVC	GY		FB-WWAKH3-L/P00	8063834	8063835	8063836
				4A		PVC	GY		FB-WWAKH3-L/P01	8063703	8063704	8063705
				4A		TPE	GY		FB-WWAKH3-L/S3930	8050463	8058559	8058560
		4	250V	4A		PVC	GY		FB-WWAKH4-L/P00	8063799	8063800	8063801
				4A		PVC	GY		FB-WWAKH4-L/P01	8063672	8063673	8063674
				4A		TPE	GY		FB-WWAKH4-L/S3930	8050465	8058561	8058562
		5	60V	4A		PVC	GY		FB-WWAKH4.5-L/P00	8063823	8063824	8063825
				4A		PVC	GY		FB-WWAKH4.5-L/P01	8063687	8063688	8063689
				4A		TPE	GY		FB-WWAKH4.5-L/S3930	8063885	8063886	8063887
	Single-ended cordset female, angled, M12, with LED	3	30V	3A	3P2	PVC	GY		FB-WWAKH3P2-L/P00	8063826	8063827	8063828
				3A	3P2	PVC	GY		FB-WWAKH3P2-L/P01	8063692	8063693	8063694
				3A	3P2	TPE	GY		FB-WWAKH3P2-L/S3930	8058611	8058612	8058613
		4	30V	3A	4P2	PVC	GY		FB-WWAKH4P2-L/P00	8063787	8063788	8063789
				3A	4P2	PVC	GY		FB-WWAKH4P2-L/P01	8063666	8063667	8063668
				3A	4P2	TPE	GY		FB-WWAKH4P2-L/S3930	8058614	8058615	8058616
		5	30V	3A	5P3	PVC	GY		FB-WWAKH4.5P3-L/P00	8063808	8063809	8063810
				3A	5P3	PVC	GY		FB-WWAKH4.5P3-L/P01	8063678	8063679	8063680
				3A	5P3	TPE	GY		FB-WWAKH4.5P3-L/S3930	8063802	8063803	8063804
	Single-ended cordset male, straight, M12	3	250V	4A		PVC	GY		FB-WASH3-L/P00	8063843	8063844	8063845
				4A		PVC	GY		FB-WASH3-L/P01	8063715	8063716	8063717
				4A		TPE	GY		FB-WASH3-L/S3930	8050468	8058563	8058564
		4	250V	4A		PVC	GY		FB-WASH4-L/P00	8063837	8063838	8063839
				4A		PVC	GY		FB-WASH4-L/P01	8063706	8063707	8063708
				4A		TPE	GY		FB-WASH4-L/S3930	8050470	8058565	8058566
		5	60V	4A		PVC	GY		FB-WASH4.5-L/P00	8063840	8063841	8063842
				4A		PVC	GY		FB-WASH4.5-L/P01	8063709	8063710	8063711
				4A		TPE	GY		FB-WASH4.5-L/S3930	8063888	8063889	8063890

		Body				Cable			L = cable length*			
		Pins	U[max]	I[max]	LED	Material	Color	UL	Item description	2m / 1m	5m / 2m	10m / 5m
	Single-ended cordset male, angled, M12	3	250V	4A		PVC	GY		FB-WWASH3-L/P00	8063781	8063782	8063783
				4A		PVC	GY		FB-WWASH3-L/P01	8063663	8063664	8063665
				4A		TPE	GY		FB-WWASH3-L/S3930	8050469	8058567	8058568
		4	250V	4A		PVC	GY		FB-WWASH4-L/P00	8063775	8063776	8063777
				4A		PVC	GY		FB-WWASH4-L/P01	8063655	8063656	8063657
				4A		TPE	GY		FB-WWASH4-L/S3930	8050471	8058569	8058570
		5	60V	4A		PVC	GY		FB-WWASH4.5-L/P00	8063675	8063676	8063677
				4A		PVC	GY		FB-WWASH4.5-L/P01	8063660	8063661	8063662
				4A		TPE	GY		FB-WWASH4.5-L/S3930	8063891	8063892	8063893
	Double-ended cordset female, straight, M12 male, straight, M12	3	250V	4A		PVC	GY		FB-WAKH3-L-FB-WASH3/P00	8063852	8063853	8063854
				4A		PVC	GY		FB-WAKH3-L-FB-WASH3/P01	8063742	8063744	8063747
				4A		TPE	GY		FB-WAKH3-L-FB-WASH3/S3930	8058587	8058588	8058589
		4	250V	4A		PVC	GY		FB-WAKH4-L-FB-WASH4/P00	8063846	8063847	8063848
				4A		PVC	GY		FB-WAKH4-L-FB-WASH4/P01	8063721	8063722	8063723
				4A		TPE	GY		FB-WAKH4-L-FB-WASH4/S3930	8058590	8058591	8058592
		5	60V	4A		PVC	GY		FB-WAKH4.5-L-FB-WASH4.5/P00	8063849	8063850	8063851
				4A		PVC	GY		FB-WAKH4.5-L-FB-WASH4.5/P01	8063733	8063734	8063735
				4A		TPE	GY		FB-WAKH4.5-L-FB-WASH4.5/S3930	8063681	8063682	8063683
	Double-ended cordset female, angled, M12 male, angled, M12	3	250V	4A		PVC	GY		FB-WWAKH3-L-FB-WWASH3/P00	8063831	8063832	8063833
				4A		PVC	GY		FB-WWAKH3-L-FB-WWASH3/P01	8063697	8063698	8063699
				4A		TPE	GY		FB-WWAKH3-L-FB-WWASH3/S3930	8058593	8058594	8058595
		4	250V	4A		PVC	GY		FB-WWAKH4-L-FB-WWASH4/P00	8063793	8063794	8063795
				4A		PVC	GY		FB-WWAKH4-L-FB-WWASH4/P01	8063669	8063670	8063671
				4A		TPE	GY		FB-WWAKH4-L-FB-WWASH4/S3930	8058596	8058597	8058598
		5	60V	4A		PVC	GY		FB-WWAKH4.5-L-FB-WWASH4.5/P00	8063820	8063821	8063822
				4A		PVC	GY		FB-WWAKH4.5-L-FB-WWASH4.5/P01	8063684	8063685	8063686
				4A		TPE	GY		FB-WWAKH4.5-L-FB-WWASH4.5/S3930	8063814	8063815	8063816
	Receptacle female, straight, M12 Soldering contact Front wall-mounting	4	250V	4A					FB-FKE4-L/PG9	8068276		
		5	60V	4A					FB-FKE4.5-L/PG9	8068277		
	Receptacle female, straight, M12 Wire contact Front wall-mounting	4	250V	4A					FB-FKE4-0,5/PG9	8068278		
		5	60V	4A					FB-FKE4.5-0,5/PG9	8068279		
	Receptacle male, straight, M12 Soldering contact Front wall-mounting	4	250V	4A					FB-FSE4-L/PG9	8068272		
		5	60V	4A					FB-FSE4.5-L/PG9	8068273		

		Body				Cable			Item description	L = cable length*		
		Pins	U[max]	I[max]	LED	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
	Receptacle male, straight, M12 Wire contact Front wall-mounting	4	250V	4A					FB-FSE4-0,5/PG9	8068274		
		5	60V	4A					FB-FSE4.5-0,5/PG9	8068275		
	Field-wireable connector female, straight, M12 Screw-/clamp contact	5	125V	4A					WAKCE5K	8063393		
	Field-wireable connector female, angled, M12 Screw-/clamp contact	5	125V	4A					WWAKCE5K	8063395		
	Field-wireable connector male, straight, M12 Screw-/clamp contact	5	125V	4A					WASCE5K	8063394		
	Field-wireable connector male, angled, M12 Screw-/clamp contact	5	125V	4A					WWASCE5K	8063396		
	Single-ended cordset female, straight, M8	3	60V	4A		PVC	GY		FB-SKPH3-L/P00	8063690	8063653	8063691
				4A		PVC	GY		FB-SKPH3-L/P01	8063700	8063701	8063702
				4A		TPE	GY		FB-SKPH3-L/S3930	8050454	8058571	8058572
		4	60V	4A		PVC	GY		FB-SKPH4-L/P00	8063652	8063695	8063696
				4A		PVC	GY		FB-SKPH4-L/P01	8063712	8063713	8063714
				4A		TPE	GY		FB-SKPH4-L/S3930	8050455	8058573	8058574
	Single-ended cordset female, angled, M8	3	60V	4A		PVC	GY		FB-SWKPH3-L/P00	8063718	8063719	8063720
				4A		PVC	GY		FB-SWKPH3-L/P01	8063730	8063731	8063732
				4A		TPE	GY		FB-SWKPH3-L/S3930	8050456	8058575	8058576
		4	60V	4A		PVC	GY		FB-SWKPH4-L/P00	8063726	8063727	8063729
				4A		PVC	GY		FB-SWKPH4-L/P01	8063736	8063737	8063738
				4A		TPE	GY		FB-SWKPH4-L/S3930	8050457	8058577	8058578
	Single-ended cordset female, angled, M8, with LED	3	30V	4A	3P2	PVC	GY		FB-SWKPH3P2-L/P00	8063743	8063745	8063746
				4A	3P2	PVC	GY		FB-SWKPH3P2-L/P01	8063761	8063763	8063765
				4A	3P2	TPE	GY		FB-SWKPH3P2-L/S3930	8058619	8058620	8058621
		4	30V	4A	4P2	PVC	GY		FB-SWKPH4P2-L/P00	8063750	8063751	8063753
				4A	4P2	PVC	GY		FB-SWKPH4P2-L/P01	8063760	8063762	8063764
				4A	4P2	TPE	GY		FB-SWKPH4P2-L/S3930	8058622	8058623	8058624




		Body				Cable			L = cable length*			
		Pins	U[max]	I[max]	LED	Material	Color	UL	Item description	2m / 1m	5m / 2m	10m / 5m
	Single-ended cordset male, straight, M8	3	60V	4A		PVC	GY		FB-SSPH3-L/P00	8063769	8063770	8063771
				4A		PVC	GY		FB-SSPH3-L/P01	8063778	8063779	8063780
				4A		TPE	GY		FB-SSPH3-L/S3930	8050458	8058579	8058580
		4	60V	4A		PVC	GY		FB-SSPH4-L/P00	8063772	8063773	8063774
				4A		PVC	GY		FB-SSPH4-L/P01	8063784	8063785	8063786
				4A		TPE	GY		FB-SSPH4-L/S3930	8050459	8058581	8058582
	Single-ended cordset male, angled, M8	3	60V	4A		PVC	GY		FB-SWSPH3-L/P00	8063790	8063791	8063792
				4A		PVC	GY		FB-SWSPH3-L/P01	8063757	8063758	8063759
				4A		TPE	GY		FB-SWSPH3-L/S3930	8050460	8058583	8058584
		4	60V	4A		PVC	GY		FB-SWSPH4-L/P00	8063796	8063797	8063798
				4A		PVC	GY		FB-SWSPH4-L/P01	8063754	8063755	8063756
				4A		TPE	GY		FB-SWSPH4-L/S3930	8050461	8058585	8058586
 	Double-ended cordset female, straight, M8 male, straight, M8	3	60V	4A		PVC	GY		FB-SKPH3-L-FB-SSPH3/P00	8063875	8063876	8063877
				4A		PVC	GY		FB-SKPH3-L-FB-SSPH3/P01	8063864	8063865	8063866
				4A		TPE	GY		FB-SKPH3-L-FB-SSPH3/S3930	8058599	8058600	8058601
		4	60V	4A		PVC	GY		FB-SKPH4-L-FB-SSPH4/P00	8063861	8063862	8063863
				4A		PVC	GY		FB-SKPH4-L-FB-SSPH4/P01	8063867	8063868	8063869
				4A		TPE	GY		FB-SKPH4-L-FB-SSPH4/S3930	8058602	8058603	8058604
 	Double-ended cordset female, angled, M8 male, angled, M8	3	60V	4A		PVC	GY		FB-SWKPH3-L-FB-SWSPH3/P00	8063858	8063859	8063860
				4A		PVC	GY		FB-SWKPH3-L-FB-SWSPH3/P01	8063871	8063872	8063873
				4A		TPE	GY		FB-SWKPH3-L-FB-SWSPH3/S3930	8058605	8058606	8058607
		4	60V	4A		PVC	GY		FB-SWKPH4-L-FB-SWSPH4/P00	8063855	8063856	8063857
				4A		PVC	GY		FB-SWKPH4-L-FB-SWSPH4/P01	8063766	8063767	8063768
				4A		TPE	GY		FB-SWKPH4-L-FB-SWSPH4/S3930	8058608	8058609	8058610

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

Nomenclature of patched connectors

Double-ended cordset

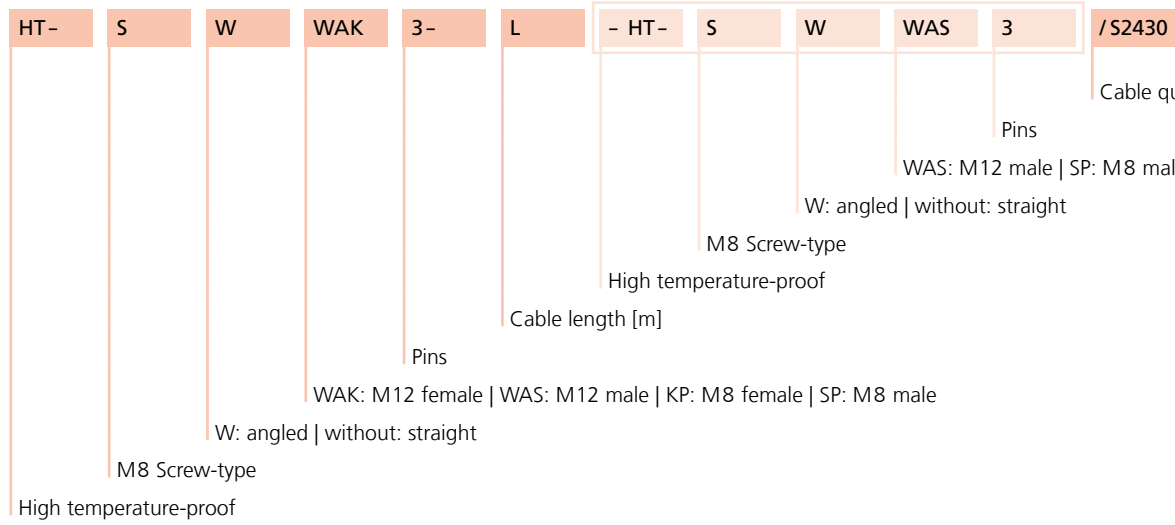

High temperature-proof



Cable	Material	UL	Colour	Feature
S2430	PTFE/PTFE		WH	-190°C...+260°C



High temperature-proof





## High temperature-proof

Technical data	M12	M8	Receptacles
Insulation resistance	≥10 <sup>8</sup> Ω	≥10 <sup>8</sup> Ω	≥10 <sup>8</sup> Ω
Resistance	≤ 5mΩ	≤ 5mΩ	≤ 5mΩ
Ambient temperature product	-20°C...+150°C	-20°C...+150°C	-20°C...+150°C
Contact material	Metal, gold-plated	Metal, gold-plated	Metal, gold-plated
Contact-carrier material	Plastic, PBT GF	Plastic, PBT GF	Plastic, PBT GF
Grip body material	Plastic, PBT GF	Plastic, PBT GF	
Coupling nut material	Metal, CuZn, nickel-plated	Metal, CuZn, nickel-plated	
Sealing (female) material	FPM/FKM	FPM/FKM	FPM/FKM
Material of external sealing			FPM/FKM
Receptacle housing material			Metal, CuZn, nickel-plated
Standards	IEC 61076-2-101	IEC 61076-2-104	IEC 61076-2-101
Degree of protection (mounted)	IP65	IP65	IP65, IP67, IP68
Mechanical life-cycle	>100 mating cycles	>100 mating cycles	>100 mating cycles
Degree of pollution	3	3	3

Due to high-temperature proof materials, our M8- and M12-connectors guarantee a reliable operating-mode even in extraordinary high-temperature applications. Permanent operating temperatures of -20°C to +150°C and a short term maximum operating temperature of +200°C do not state a problem to this product line.

		Body				Cable			Item description	L = cable length*		
		Pins	U[max]	I[max]	Special	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
	Single-ended cordset female, straight, M12	3	250V	4A		PTFE	WH		HT-WAK3-L/S2430	8039210	8036085	8039211
		4	250V	4A		PTFE	WH		HT-WAK4-L/S2430	8036518	8036086	8036154
		5	60V	4A		PTFE	WH		HT-WAK4.5-L/S2430	8039212	8036087	8039213
	Single-ended cordset female, angled, M12	3	250V	4A		PTFE	WH		HT-WWAK3-L/S2430	8039224	8036088	8039225
		4	250V	4A		PTFE	WH		HT-WWAK4-L/S2430	8039226	8036089	8037214
		5	60V	4A		PTFE	WH		HT-WWAK4.5-L/S2430	8039227	8036090	8039228
	Single-ended cordset male, straight, M12	3	250V	4A		PTFE	WH		HT-WAS3-L/S2430	8039231	8036091	8039232
		4	250V	4A		PTFE	WH		HT-WAS4-L/S2430	8039233	8036092	8039234
		5	60V	4A		PTFE	WH		HT-WAS4.5-L/S2430	8039235	8036093	8038342
	Single-ended cordset male, angled, M12	3	250V	4A		PTFE	WH		HT-WWAS3-L/S2430	8039467	8036094	8039468
		4	250V	4A		PTFE	WH		HT-WWAS4-L/S2430	8039469	8036095	8039470
		5	60V	4A		PTFE	WH		HT-WWAS4.5-L/S2430	8039471	8036096	8039472
	Double-ended cordset female, straight, M12	3	250V	4A		PTFE	WH		HT-WAK3-L-HT-WAS3/S2430	8036254	8039479	8039480
		4	250V	4A		PTFE	WH		HT-WAK4-L-HT-WAS4/S2430	8038667	8038668	8038669
		5	60V	4A		PTFE	WH		HT-WAK4.5-L-HT-WAS4.5/S2430	8051958	8039949	8039950
	Double-ended cordset female, angled, M12	3	250V	4A		PTFE	WH		HT-WWAK3-L-HT-WWAS3/S2430	8051956	8039958	8039959
		4	250V	4A		PTFE	WH		HT-WWAK4-L-HT-WWAS4/S2430	8051957	8039961	8039137
		5	60V	4A		PTFE	WH		HT-WWAK4.5-L-HT-WWAS4.5/S2430	8051959	8039963	8039964
	Receptacle female, straight, M12	3	250V	4A					HT-FK3-0,5/16/S2470	8037311		
		4	250V	4A					HT-FK4-0,5/16/S2470	8037322		
		5	60V	4A					HT-FK4.5-0,5/16/S2470	8037323		
	Receptacle male, straight, M12	3	250V	4A					HT-FS3-0,5/16/S2470	8037288		
		4	250V	4A					HT-FS4-0,5/16/S2470	8037292		
		5	60V	4A					HT-FS4.5-0,5/16/S2470	8037293		
	Single-ended cordset female, straight, M8	3	60V	4A		PTFE	WH		HT-SKP3-L/S2430	8036605	8036097	8039482
		4	60V	4A		PTFE	WH		HT-SKP4-L/S2430	8039483	8036098	8037215
	Single-ended cordset female, angled, M8	3	60V	4A		PTFE	WH		HT-SWKP3-L/S2430	8039484	8036099	8039485
		4	60V	4A		PTFE	WH		HT-SWKP4-L/S2430	8039486	8036100	8037216
	Single-ended cordset male, straight, M8	3	60V	4A		PTFE	WH		HT-SSP3-L/S2430	8039487	8036101	8039488
		4	60V	4A		PTFE	WH		HT-SSP4-L/S2430	8039489	8036102	8039490

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Body				Cable				L = cable length*		
		Pins	U[max]	I[max]	Special	Material	Color	UL	Item description	2m / 1m	5m / 2m	10m / 5m
	Single-ended cordset male, angled, M8	3	60V	4A		PTFE	WH		HT-SWSP3-L/S2430	8039491	8036103	8039492
		4	60V	4A		PTFE	WH		HT-SWSP4-L/S2430	8039493	8036104	8039494
	Double-ended cordset female, straight, M8	3	60V	4A		PTFE	WH		HT-SKP3-L-HT-SSP3/S2430	8043355	8039972	8039973
		4	60V	4A		PTFE	WH		HT-SKP4-L-HT-SSP4/S2430	8051990	8039975	8039976
	Double-ended cordset female, angled, M8	3	60V	4A		PTFE	WH		HT-SWKP3-L-HT-SWSP3/S2430	8051991	8039978	8039979
		4	60V	4A		PTFE	WH		HT-SWKP4-L-HT-SWSP4/S2430	8051992	8039981	8039982
	Double-ended cordset male, angled, M8											


High temperature-proof

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.


Nomenclature

AL-	FV	M12	E	S	S	A	3.xxx	P/	M16	S520
		M12   M8	Stainless steel	S: male   K: female	S: shielded   U: without	Coding	Contacts.allocation code	P: Print contact   L: Soldering contact   0.5: Wire-length [m]	Screw in thread M16x1.5   PG9   M12x1	Positionable
Product line										
FV: Receptacle front wall-mounting   FH: Receptacle back wall-mounting										

Through the further development of our platform-orientated panel connector- and receptacle program, we have modified our nomenclature. In addition to the previous and still valid nomenclature (below) we are also illustrating the new nomenclature (above) for your convenience.

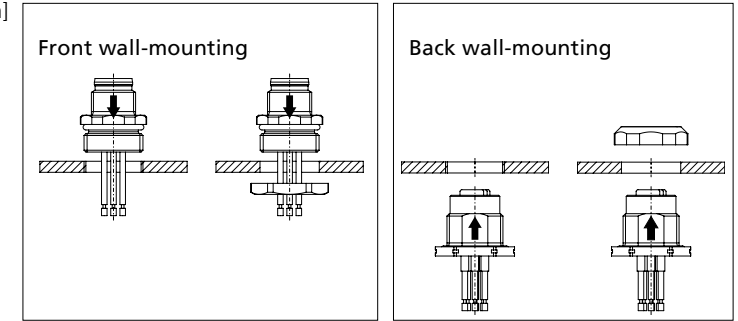


IE-	W	FK	F	D	E	S	X	8-	F	L	/ 16	/ S3500	/ S3525
		FK: female   FS: male		Adjustable	E: Stainless steel 1.4404   without: CuZn, nickel-plated	Shielded	Coding	Pins	F: M8 Threaded front (Back-wall mounting)	Cable length/Wire-length [m]	Screw in thread 16: M16x1.5   12: M12x1	Cable quality	Extra: e.g wall-thickness compensation or colored contact-carrier
Product line													
W: angled   without: straight													

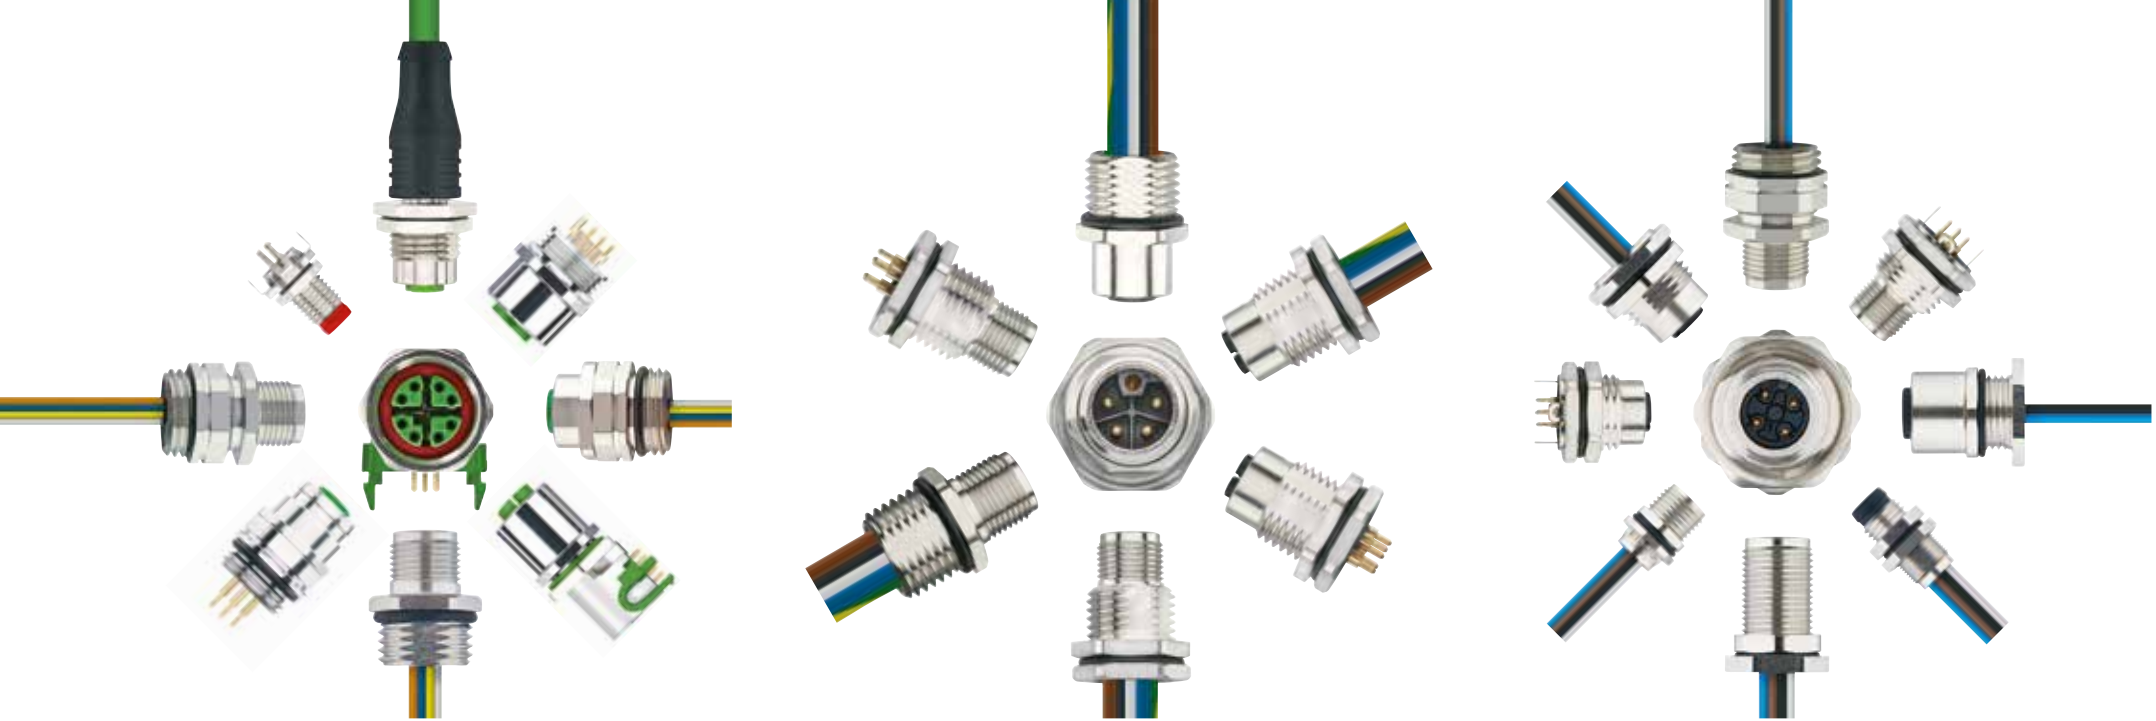

## Panel connectors | Receptacles

Technical data	M12 Receptacles	M8 Receptacles	M12 Panel connectors	M8 Panel connectors	8mm snap Panel connectors
Insulation resistance	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$
Resistance	$\leq 5 m\Omega$	$\leq 5 m\Omega$	$\leq 5 m\Omega$	$\leq 5 m\Omega$	$\leq 5 m\Omega$
Ambient temperature product	-30°C...+90°C	-30°C...+90°C	-30°C...+90°C	-30°C...+90°C	-30°C...+90°C
Contact material	Metal, gold-plated	Metal, gold-plated	Metal, gold-plated	Metal, gold-plated	Metal, gold-plated
Contact-carrier material	Plastic	Plastic	Plastic	Plastic	Plastic, PA
Receptacle housing material	Metal   Stainless steel	Metal   Stainless steel			
Standards	IEC 61076-2-101	IEC 61076-2-104	IEC 61076-2-101	IEC 61076-2-104	IEC 61076-2-104
Degree of protection (mounted)	IP65, IP67, IP68	IP65, IP67, IP68	IP65, IP67	IP65, IP67	IP65, IP67
Mechanical life-cycle	>100 mating cycles	>100 mating cycles	>100 mating cycles	>100 mating cycles	>100 mating cycles
Degree of pollution	3	3/2	3/2	3/2	3/2


		Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.
 <p>Sensor/actuator female, straight, M12 Front wall-mounting Wire contact</p>	3	A	250V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12EKUA3-0,5/M16	8082880	
									PG9	AL-FVM12EKUA3-0,5/PG9	8082892	
									Metal, CuZn, nickel-plated	M12x1	AL-FVM12KUA3-0,5/M12	8071727
										M16x1.5	AL-FVM12KUA3-0,5/M16	8071679
										PG9	AL-FVM12KUA3-0,5/PG9	8072461
									4	A	250V	4 A
	PG9	AL-FVM12EKUA4-0,5/PG9	8082893									
	Metal, CuZn, nickel-plated	M12x1	AL-FVM12KUA4-0,5/M12	8071730								
		M16x1.5	AL-FVM12KUA4-0,5/M16	8071682								
		PG9	AL-FVM12KUA4-0,5/PG9	8072462								
	4+PE	A	60V	4 A	•	0.50		Stainless steel 1.4404				
									PG9	AL-FVM12EKUA5-0,5/PG9	8082899	
Metal, CuZn, nickel-plated									M12x1	AL-FVM12KUA5-0,5/M12	8071738	
									M16x1.5	AL-FVM12KUA5-0,5/M16	8071693	
									PG9	AL-FVM12KUA5-0,5/PG9	8072467	
5									A	60V	4 A	•
	PG9	AL-FVM12EKUA4.5-0,5/PG9	8082897									
	Metal, CuZn, nickel-plated	M12x1	AL-FVM12KUA4.5-0,5/M12	8071734								
		M16x1.5	AL-FVM12KUA4.5-0,5/M16	8071691								
		PG9	AL-FVM12KUA4.5-0,5/PG9	8072465								
	8	A	30V	2 A	•	0.50		Stainless steel 1.4404				
PG9									AL-FVM12EKUA8-0,5/PG9	8082906		
Metal, CuZn, nickel-plated									M12x1	AL-FVM12KUA8-0,5/M12	8071740	
									M16x1.5	AL-FVM12KUA8-0,5/M16	8071695	
									PG9	AL-FVM12KUA8-0,5/PG9	8072469	
12									A	30V	1.5 A	•
	PG9	AL-FVM12EKUA12-0,5/PG9	8082907									
	Metal, CuZn, nickel-plated	M12x1	AL-FVM12KUA12-0,5/M12	8071742								
		M16x1.5	AL-FVM12KUA12-0,5/M16	8071696								
		PG9	AL-FVM12KUA12-0,5/PG9	8072470								





Sensor/actuator  
female, straight, M12  
Front wall-mounting, position-  
able  
Wire contact


Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.
3	A	250V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12EKUA3-0,5/M16/S520	8082908
							Metal, CuZn, nickel-plated	M16x1.5	AL-FVM12KUA3-0,5/M16/S520	8077913
							PG9	AL-FVM12KUA3-0,5/PG9/S520	8077917	
4	A	250V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12EKUA4-0,5/M16/S520	8082909
							Metal, CuZn, nickel-plated	M16x1.5	AL-FVM12KUA4-0,5/M16/S520	8077902
							PG9	AL-FVM12KUA4-0,5/PG9/S520	8077918	
4+PE	A	60V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12EKUA5-0,5/M16/S520	8082915
							Metal, CuZn, nickel-plated	M16x1.5	AL-FVM12KUA5-0,5/M16/S520	8077908
							PG9	AL-FVM12KUA5-0,5/PG9/S520	8077924	
5	A	60V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12EKUA4.5-0,5/M16/S520	8082913
							Metal, CuZn, nickel-plated	M16x1.5	AL-FVM12KUA4.5-0,5/M16/S520	8077906
							PG9	AL-FVM12KUA4.5-0,5/PG9/S520	8077922	
8	A	30V	2 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12EKUA8-0,5/M16/S520	8082918
							Metal, CuZn, nickel-plated	M16x1.5	AL-FVM12KUA8-0,5/M16/S520	8077911
							PG9	AL-FVM12KUA8-0,5/PG9/S520	8077927	
12	A	30V	1.5 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12EKUA12-0,5/M16/S520	8082919
							Metal, CuZn, nickel-plated	M16x1.5	AL-FVM12KUA12-0,5/M16/S520	8077912
							PG9	AL-FVM12KUA12-0,5/PG9/S520	8077928	

		Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.
 <p>Sensor/actuator male, straight, M12 Front wall-mounting Wire contact</p>	3	A	250V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12ESUA3-0,5/M16	8082990	
									PG9	AL-FVM12ESUA3-0,5/PG9	8083002	
									Metal, CuZn, nickel-plated	M12x1	AL-FVM12SUA3-0,5/M12	8071831
										M16x1.5	AL-FVM12SUA3-0,5/M16	8071801
										PG9	AL-FVM12SUA3-0,5/PG9	8072486
									4	A	250V	4 A
	PG9	AL-FVM12ESUA4-0,5/PG9	8083019									
	Metal, CuZn, nickel-plated	M12x1	AL-FVM12SUA4-0,5/M12	8071832								
		M16x1.5	AL-FVM12SUA4-0,5/M16	8071802								
		PG9	AL-FVM12SUA4-0,5/PG9	8072487								
	4+PE	A	60V	4 A	•	0.50		Stainless steel 1.4404				
									PG9	AL-FVM12ESUA5-0,5/PG9	8083026	
Metal, CuZn, nickel-plated									M12x1	AL-FVM12SUA5-0,5/M12	8071837	
									M16x1.5	AL-FVM12SUA5-0,5/M16	8071808	
									PG9	AL-FVM12SUA5-0,5/PG9	8072492	
5									A	60V	4 A	•
	PG9	AL-FVM12ESUA4.5-0,5/PG9	8083023									
	Metal, CuZn, nickel-plated	M12x1	AL-FVM12SUA4.5-0,5/M12	8071835								
		M16x1.5	AL-FVM12SUA4.5-0,5/M16	8071805								
		PG9	AL-FVM12SUA4.5-0,5/PG9	8072490								
	8	A	30V	2 A	•	0.50		Stainless steel 1.4404				
PG9									AL-FVM12ESUA8-0,5/PG9	8083028		
Metal, CuZn, nickel-plated									M12x1	AL-FVM12SUA8-0,5/M12	8071839	
									M16x1.5	AL-FVM12SUA8-0,5/M16	8071810	
									PG9	AL-FVM12SUA8-0,5/PG9	8072494	
12									A	30V	1.5 A	•
	PG9	AL-FVM12ESUA12-0,5/PG9	8083029									
	Metal, CuZn, nickel-plated	M12x1	AL-FVM12SUA12-0,5/M12	8071840								
		M16x1.5	AL-FVM12SUA12-0,5/M16	8071811								
		PG9	AL-FVM12SUA12-0,5/PG9	8072495								



Sensor/actuator  
male, straight, M12  
Front wall-mounting, position-  
able  
Wire contact



Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.
3	A	250V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12ESUA3-0,5/M16/S520	8083030
							Metal, CuZn, nickel-plated	M16x1.5	AL-FVM12SUA3-0,5/M16/S520	8077964
							PG9	AL-FVM12SUA3-0,5/PG9/S520	8078052	
4	A	250V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12ESUA4-0,5/M16/S520	8083031
							Metal, CuZn, nickel-plated	M16x1.5	AL-FVM12SUA4-0,5/M16/S520	8077965
							PG9	AL-FVM12SUA4-0,5/PG9/S520	8078053	
4+PE	A	60V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12ESUA5-0,5/M16/S520	8083038
							Metal, CuZn, nickel-plated	M16x1.5	AL-FVM12SUA5-0,5/M16/S520	8077972
							PG9	AL-FVM12SUA5-0,5/PG9/S520	8078060	
5	A	60V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12ESUA4.5-0,5/M16/S520	8083035
							Metal, CuZn, nickel-plated	M16x1.5	AL-FVM12SUA4.5-0,5/M16/S520	8077969
							PG9	AL-FVM12SUA4.5-0,5/PG9/S520	8078057	
8	A	30V	2 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12ESUA8-0,5/M16/S520	8083040
							Metal, CuZn, nickel-plated	M16x1.5	AL-FVM12SUA8-0,5/M16/S520	8077974
							PG9	AL-FVM12SUA8-0,5/PG9/S520	8078062	
12	A	30V	1.5 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FVM12ESUA12-0,5/M16/S520	8083041
							Metal, CuZn, nickel-plated	M16x1.5	AL-FVM12SUA12-0,5/M16/S520	8077975
							PG9	AL-FVM12SUA12-0,5/PG9/S520	8078063	

		Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.		
 <p>Sensor/actuator female, straight, M12 Back wall-mounting Wire contact</p>	3	A	250V	4 A	•	0.50			Metal, CuZn, nickel-plated	PG9	AL-FHM12KUA3-0,5/PG9	8072450		
									Stainless steel 1.4404	M16x1.5	AL-FHM12EKUA3-0,5/M16	8082719		
									Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KUA3-0,5/M16	8071533		
									1,0...2,5	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA3-0,5/M12/S3525	8076756	
									2,5...4,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA3-0,5/M12/S3540	8076742	
	4,0...5,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA3-0,5/M12/S3550	8071705									
	4	A	250V	4 A	•	0.50				Stainless steel 1.4404	M16x1.5	AL-FHM12EKUA4-0,5/M16	8082720	
										Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KUA4-0,5/M16	8071536	
										Metal, CuZn, nickel-plated	PG9	AL-FHM12KUA4-0,5/PG9	8072451	
										1,0...2,5	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA4-0,5/M12/S3525	8076795
										2,5...4,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA4-0,5/M12/S3540	8076794
	4,0...5,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA4-0,5/M12/S3550	8071707									
	4+PE	A	60V	4 A	•	0.50				Stainless steel 1.4404	M16x1.5	AL-FHM12EKUA5-0,5/M16	8082726	
										Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KUA5-0,5/M16	8071666	
										Metal, CuZn, nickel-plated	PG9	AL-FHM12KUA5-0,5/PG9	8072456	
1,0...2,5										Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA5-0,5/M12/S3525	8076808	
2,5...4,0										Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA5-0,5/M12/S3540	8076807	
4,0...5,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA5-0,5/M12/S3550	8071713										
5	A	60V	4 A	•	0.50				Metal, CuZn, nickel-plated	PG9	AL-FHM12KUA4.5-0,5/PG9	8072454		
									Stainless steel 1.4404	M16x1.5	AL-FHM12EKUA4.5-0,5/M16	8082724		
									Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KUA4.5-0,5/M16	8071540		
									1,0...2,5	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA4.5-0,5/M12/S3525	8076801	
									2,5...4,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA4.5-0,5/M12/S3540	8076800	
4,0...5,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA4.5-0,5/M12/S3550	8071711										
8	A	30V	2 A	•	0.50				Stainless steel 1.4404	M16x1.5	AL-FHM12EKUA8-0,5/M16	8082729		
									Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KUA8-0,5/M16	8071668		
									Metal, CuZn, nickel-plated	PG9	AL-FHM12KUA8-0,5/PG9	8072458		
									1,0...2,5	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA8-0,5/M12/S3525	8076825	
									2,5...4,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA8-0,5/M12/S3540	8076824	
4,0...5,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA8-0,5/M12/S3550	8071716										
12	A	30V	1.5 A	•	0.50				Stainless steel 1.4404	M16x1.5	AL-FHM12EKUA12-0,5/M16	8082730		
									Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KUA12-0,5/M16	8071669		
									Metal, CuZn, nickel-plated	PG9	AL-FHM12KUA12-0,5/PG9	8072459		
									1,0...2,5	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA12-0,5/M12/S3525	8076827	
									2,5...4,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA12-0,5/M12/S3540	8076826	
4,0...5,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA12-0,5/M12/S3550	8071718										













Sensor/actuator  
female, straight, M12  
Back wall-mounting  
Print contact












Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.	
3	A	250V	4 A	•			Stainless steel 1.4404	M16x1.5	AL-FHM12EKUA3-P/M16	8084910	
							Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KUA3-P/M16	8072160	
								PG9	AL-FHM12KUA3-P/PG9	8072173	
							1,0...2,5	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA3-P/M12/S3525	8076558
							2,5...4,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA3-P/M12/S3540	8076557
							4,0...5,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA3-P/M12/S3550	8072202
							4	A	250V	4 A	•
Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KUA4-P/M16	8072162								
	PG9	AL-FHM12KUA4-P/PG9	8072174								
1,0...2,5	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA4-P/M12/S3525	8076560							
2,5...4,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA4-P/M12/S3540	8076559							
4,0...5,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA4-P/M12/S3550	8072203							
4+PE	A	60V	4 A	•							
							Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KUA5-P/M16	8072168	
								PG9	AL-FHM12KUA5-P/PG9	8072177	
							1,0...2,5	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA5-P/M12/S3525	8076566
							2,5...4,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA5-P/M12/S3540	8076565
							4,0...5,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA5-P/M12/S3550	8072206
							8	A	30V	2 A	•
Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KUA8-P/M16	8072170								
	PG9	AL-FHM12KUA8-P/PG9	8072179								
1,0...2,5	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA8-P/M12/S3525	8076570							
2,5...4,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA8-P/M12/S3540	8076569							
4,0...5,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA8-P/M12/S3550	8072208							
12	A	30V	1.5 A	•							
							Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KUA12-P/M16	8072171	
								PG9	AL-FHM12KUA12-P/PG9	8072180	
							1,0...2,5	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA12-P/M12/S3525	8076572
							2,5...4,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA12-P/M12/S3540	8076571
							4,0...5,0	Metal, CuZn, nickel-plated	M12x1	AL-FHM12KUA12-P/M12/S3550	8072209











		Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.	
 <p>Sensor/actuator female, straight, M12 Back wall-mounting Print contact shielded</p>		3	A	250V	4 A	•			Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KSA3-P/M16	8072214	
											PG9	AL-FHM12KSA3-P/PG9	8072239
		4	A	250V	4 A	•				Metal, CuZn, nickel-plated	PG9	AL-FHM12KSA4-P/PG9	8072240
											M16x1.5	AL-FHM12KSA4-P/M16	8072215
		4+PE	A	60V	4 A	•				Metal, CuZn, nickel-plated	PG9	AL-FHM12KSA5-P/PG9	8072243
											M16x1.5	AL-FHM12KSA5-P/M16	8072218
		8	A	30V	2 A	•				Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KSA8-P/M16	8088765
											PG9	AL-FHM12KSA8-P/PG9	8088766
		12	A	30V	1.5 A	•				Metal, CuZn, nickel-plated	M16x1.5	AL-FHM12KSA12-P/M16	8088767
											PG9	AL-FHM12KSA12-P/PG9	8088768
 <p>Sensor/actuator male, straight, M12 Back wall-mounting Wire contact</p>		3	A	250V	4 A	•	0.50		Stainless steel 1.4404	M16x1.5	AL-FHM12ESUA3-0,5/M16	8082977	
									Metal, CuZn, nickel-plated	M12x1	AL-FHM12SUA3-0,5/M12	8071819	
										M16x1.5	AL-FHM12SUA3-0,5/M16	8071790	
										PG9	AL-FHM12SUA3-0,5/PG9	8072475	
										M16x1.5	AL-FHM12ESUA4-0,5/M16	8082978	
										M12x1	AL-FHM12SUA4-0,5/M12	8071820	
		4	A	250V	4 A	•	0.50			Stainless steel 1.4404	M16x1.5	AL-FHM12ESUA4-0,5/M16	8082978
										Metal, CuZn, nickel-plated	M12x1	AL-FHM12SUA4-0,5/M12	8071820
											M16x1.5	AL-FHM12SUA4-0,5/M16	8071791
											PG9	AL-FHM12SUA4-0,5/PG9	8072476
											M16x1.5	AL-FHM12ESUA5-0,5/M16	8082985
											M12x1	AL-FHM12SUA5-0,5/M12	8071825
		4+PE	A	60V	4 A	•	0.50			Stainless steel 1.4404	M16x1.5	AL-FHM12ESUA5-0,5/M16	8082985
										Metal, CuZn, nickel-plated	M12x1	AL-FHM12SUA5-0,5/M12	8071825
											M16x1.5	AL-FHM12SUA5-0,5/M16	8071796
											PG9	AL-FHM12SUA5-0,5/PG9	8072481
											M16x1.5	AL-FHM12ESUA4.5-0,5/M16	8082982
											M12x1	AL-FHM12SUA4.5-0,5/M12	8071823
5	A	60V	4 A	•	0.50			Stainless steel 1.4404	M16x1.5	AL-FHM12ESUA4.5-0,5/M16	8082982		
								Metal, CuZn, nickel-plated	M12x1	AL-FHM12SUA4.5-0,5/M12	8071823		
									M16x1.5	AL-FHM12SUA4.5-0,5/M16	8071794		
									PG9	AL-FHM12SUA4.5-0,5/PG9	8072479		
									M16x1.5	AL-FHM12ESUA8-0,5/M16	8082987		
									M12x1	AL-FHM12SUA8-0,5/M12	8071827		
8	A	30V	2 A	•	0.50			Stainless steel 1.4404	M16x1.5	AL-FHM12ESUA8-0,5/M16	8082987		
								Metal, CuZn, nickel-plated	M12x1	AL-FHM12SUA8-0,5/M12	8071827		
									M16x1.5	AL-FHM12SUA8-0,5/M16	8071799		
									PG9	AL-FHM12SUA8-0,5/PG9	8072483		
									M16x1.5	AL-FHM12ESUA12-0,5/M16	8082988		
									M12x1	AL-FHM12SUA12-0,5/M12	8071829		
12	A	30V	1.5 A	•	0.50			Stainless steel 1.4404	M16x1.5	AL-FHM12ESUA12-0,5/M16	8082988		
								Metal, CuZn, nickel-plated	M12x1	AL-FHM12SUA12-0,5/M12	8071829		
									M16x1.5	AL-FHM12SUA12-0,5/M16	8071800		
									PG9	AL-FHM12SUA12-0,5/PG9	8072484		
























		Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.	
	Sensor/actuator female, angled, M12 Back wall-mounting Print contact	4	A	250V	4 A	•		1,0...2,5	Metal, CuZn, nickel-plated		EC-WFKF4-P/12/S3525	8050275	
								2,5...4,0			EC-WFKF4-P/12/S3540	8050274	
								4,0...5,0			EC-WFKF4-P/12/S3550	8045188	
		4+PE	A	60V	4 A	•			1,0...2,5	Metal, CuZn, nickel-plated		EC-WFKF5-P/12/S3525	8050273
									2,5...4,0			EC-WFKF5-P/12/S3540	8050272
									4,0...5,0			EC-WFKF5-P/12/S3550	8050257
	Sensor/actuator male, angled, M12 Back wall-mounting Print contact	4	A	250V	4 A	•		1,0...5,0	Metal, CuZn, nickel-plated		EC-WFSF4-P/12	8046571	
		4+PE	A	60V	4 A	•			Metal   Stainless steel		EC-WFSF5-P/12	8044960	
	male, M12 Soldering contact	4	A	250V	4 A						EWAS4	8008155	
		4+PE	A	60V	4 A						EWAS5	8017592	
		5	A	60V	4 A						EWAS4.5	8008156	
		8	A	30V	2 A						EWAS8	8009737	
		12	A	30V	1.5 A						EWAS12	8030496	
	Food & Beverage female, straight, M12 Front wall-mounting Soldering contact	4	A	250V	4 A				V4A	PG9	FB-FKE4-L/PG9	8068276	
		5	A	60V	4 A				V4A	PG9	FB-FKE4.5-L/PG9	8068277	
	Food & Beverage female, straight, M12 Front wall-mounting Wire contact	4	A	250V	4 A		0.50		V4A	PG9	FB-FKE4-0,5/PG9	8068278	
		5	A	60V	4 A		0.50		V4A	PG9	FB-FKE4.5-0,5/PG9	8068279	
	Food & Beverage male, straight, M12 Front wall-mounting Soldering contact	4	A	250V	4 A				V4A	PG9	FB-FSE4-L/PG9	8068272	
		5	A	60V	4 A				V4A	PG9	FB-FSE4.5-L/PG9	8068273	
	Food & Beverage male, straight, M12 Front wall-mounting Wire contact	4	A	250V	4 A		0.50		V4A	PG9	FB-FSE4-0,5/PG9	8068274	
		5	A	60V	4 A		0.50		V4A	PG9	FB-FSE4.5-0,5/PG9	8068275	
	High temperature female, straight, M12 Front wall-mounting Wire contact	3	A	250V	4 A		0.50		Metal, CuZn, nickel-plated	M16x1.5	HT-FK3-0,5/16/S2470	8037311	
		4	A	250V	4 A		0.50		Metal, CuZn, nickel-plated	M16x1.5	HT-FK4-0,5/16/S2470	8037322	
		5	A	60V	4 A		0.50		Metal, CuZn, nickel-plated	M16x1.5	HT-FK4.5-0,5/16/S2470	8037323	
	High temperature male, straight, M12 Front wall-mounting Wire contact	3	A	250V	4 A		0.50		Metal, CuZn, nickel-plated	M16x1.5	HT-FS3-0,5/16/S2470	8037288	
		4	A	250V	4 A		0.50		Metal, CuZn, nickel-plated	M16x1.5	HT-FS4-0,5/16/S2470	8037292	
		5	A	60V	4 A		0.50		Metal, CuZn, nickel-plated	M16x1.5	HT-FS4.5-0,5/16/S2470	8037293	
	IE, rail approved female, straight, M12 Back wall-mounting Wire contact	4	D	250V	4 A	•	0.50		Metal, CuZn, nickel-plated	M16x1.5	IE-FHM12KUD4.029-0,5/M16	8072504	

















		Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.
	IE, rail approved male, straight, M12 Back wall-mounting Wire contact	4	D	250V	4 A	•	0.50		Metal, CuZn, nickel-plated	M16x1.5	IE-FHM12SUD4.029-0,5/M16	8072520
	IE, rail approved female, straight, M12 Front wall-mounting Wire contact	4	D	250V	4 A	•	0.50		Metal, CuZn, nickel-plated	M16x1.5	IE-FVM12KUD4.029-0,5/M16	8072505
	IE, rail approved female, straight, M12 Front wall-mounting, positionable Wire contact	4	D	250V	4 A	•	0.50		Metal, CuZn, nickel-plated	M16x1.5	IE-FVM12KUD4.029-0,5/M16/S520	8077905
	IE, rail approved male, straight, M12 Front wall-mounting Wire contact	4	D	250V	4 A	•	0.50		Metal, CuZn, nickel-plated	M16x1.5	IE-FVM12SUD4.029-0,5/M16	8072521
	IE, rail approved male, straight, M12 Front wall-mounting, positionable Wire contact	4	D	250V	4 A	•	0.50		Metal, CuZn, nickel-plated	M16x1.5	IE-FVM12SUD4.029-0,5/M16/S520	8077968
	IE, rail approved male, straight, M12 Back wall-mounting Print contact	4	D	250V	4 A	•		1,0...5,0	Metal, CuZn, nickel-plated	M16x1.5	IE-FHM12SUD4-P/M16	8072586
	IE, rail approved female, straight, M12 Front wall-mounting Print contact shielded	8	X	50V <sub>AC</sub>   60V <sub>DC</sub>	0.5 A	•		0,9...2,5	Metal, CuZn, nickel-plated	M12x1	IE-FKDSX8-P/12	8050232
	IE, rail approved female, straight, M12 Back wall-mounting Print contact	4	D	250V	4 A	•		1,0...5,0	Metal, CuZn, nickel-plated	M16x1.5	IE-FHM12KUD4-P/M16	8072576
	IE, rail approved female, straight, M12 Back wall-mounting Print contact	4	D	250V	4 A	•		1,0...2,5	Metal, CuZn, nickel-plated	M12x1	IE-FHM12KUD4-P/M12/S3525	8074847
								2,5...4,0	Metal, CuZn, nickel-plated	M12x1	IE-FHM12KUD4-P/M12/S3540	8074846
								4,0...5,0	Metal, CuZn, nickel-plated	M12x1	IE-FHM12KUD4-P/M12/S3550	8072578
	female, straight, M12 Back wall-mounting Print contact shielded	8	X	50V <sub>AC</sub>   60V <sub>DC</sub>	0.5 A	•			Metal, CuZn, nickel-plated		IE-FHM12KSX8P/PG9	8079981
	Industrial Ethernet female, angled, M12 Back wall-mounting Print contact shielded	4	D	250V	4 A	•		1,0...2,5	Metal, CuZn, nickel-plated	M12x1	IE-WFKFSY4-P/12/S3525	8050282
								2,5...4,0	Metal, CuZn, nickel-plated	M12x1	IE-WFKFSY4-P/12/S3540	8050284
								4,0...5,0	Metal, CuZn, nickel-plated	M12x1	IE-WFKFSY4-P/12/S3550	8050285









		Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.
	IE, rail approved female, angled, M12 Back wall-mounting Print contact shielded	8	X	50V <sub>AC</sub>   60V <sub>DC</sub>	0.5 A	•		1,0...2,5	Metal, CuZn, nickel-plated		IE-WFKFSX8-P/12/S3525	8059345
								2,5...4,0			IE-WFKFSX8-P/12/S3540	8059346
								4,0...5,0			IE-WFKFSX8-P/12/S3550	8059347
	Industrial Ethernet female, straight, M12 Back wall-mounting PROFINET AWG22/7 Typ C shielded	4	D	250V	4 A		2		Metal, CuZn, nickel-plated	M16x1.5	IE-FKFDSY4.029-2/16/S2171	8063608
								5			IE-FKFDSY4.029-5/16/S2171	8063609
								10			IE-FKFDSY4.029-10/16/S2171	8063610
	Industrial Ethernet female, straight, M12 Back wall-mounting PROFINET robotic AWG22/19 Typ R, shielded	4	D	250V	4 A		2		Metal, CuZn, nickel-plated	M16x1.5	IE-FKFDSY4.029-2/16/S5100	8088147
								5			IE-FKFDSY4.029-5/16/S5100	8088148
								10			IE-FKFDSY4.029-10/16/S5100	8088149
	Industrial Ethernet female, straight, M12 Front wall-mounting PROFINET AWG22/7 Typ C shielded	4	D	250V	4 A		2		Metal, CuZn, nickel-plated	M16x1.5	IE-FKSY4.029-2/16/S2171/S3941	8063614
								5			IE-FKSY4.029-5/16/S2171/S3941	8063615
								10			IE-FKSY4.029-10/16/S2171/S3941	8063616
	Industrial Ethernet female, straight, M12 Front wall-mounting PROFINET robotic AWG22/19 Typ R, shielded	4	D	250V	4 A		2		Metal, CuZn, nickel-plated	M16x1.5	IE-FKSY4.029-2/16/S5100/S3941	8088984
								5			IE-FKSY4.029-5/16/S5100/S3941	8088985
								10			IE-FKSY4.029-10/16/S5100/S3941	8089428
	Industrial Ethernet female, straight, M12 Back wall-mounting shielded	4	D	250V	4 A		2		Metal, CuZn, nickel-plated	M16x1.5	IE-FKFDSY4.082-2/16/S3400	8064034
								5			IE-FKFDSY4.082-5/16/S3400	8064035
								10			IE-FKFDSY4.082-10/16/S3400	8064036
	Industrial Ethernet female, angled, M12 Back wall-mounting PROFINET AWG22/7 Typ C shielded	4	D	250V	4 A		2		Metal, CuZn, nickel-plated	M16x1.5	IE-WFKFDSY4.029-2/16/S2171	8063611
								5			IE-WFKFDSY4.029-5/16/S2171	8063612
								10			IE-WFKFDSY4.029-10/16/S2171	8063613
	Industrial Ethernet female, angled, M12 Back wall-mounting PROFINET robotic AWG22/19 Typ R, shielded	4	D	250V	4 A		2		Metal, CuZn, nickel-plated	M16x1.5	IE-WFKFDSY4.029-2/16/S5100	8088150
								5			IE-WFKFDSY4.029-5/16/S5100	8088151
								10			IE-WFKFDSY4.029-10/16/S5100	8088152
	Industrial Ethernet female, straight, M12 Front wall-mounting Sercos shielded	4	D	250V	4 A		2		Metal, CuZn, nickel-plated	M16x1.5	IE-FKSY4.029-2/16/S3800/S3801	8063605
								5			IE-FKSY4.029-5/16/S3800/S3801	8063606
								10			IE-FKSY4.029-10/16/S3800/S3801	8063607
	Industrial Ethernet female, straight, M12 Back wall-mounting Print contact	4	D	250V	4 A	•			Metal, CuZn, nickel-plated	M16x1.5	IE-FKFDY4-P/16/S38	8055849













		Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.	
	Industrial Ethernet female, angled, M12 Back wall-mounting Print contact shielded	4	D	250V	4 A			1,0...2,5	Metal, CuZn, nickel-plated		IE-WFKFSY4-P/12/S3825	8055850	
								2,5...4,0			IE-WFKFSY4-P/12/S3840	8055851	
								4,0...5,0			IE-WFKFSY4-P/12/S3850	8055852	
	Industrial Ethernet female, straight, M12 Back wall-mounting Sercos shielded	4	D	250V	4 A		2		Metal, CuZn, nickel-plated	M16x1.5	IE-FKFDSY4.029-2/16/S3800/S38	8063599	
								5			IE-FKFDSY4.029-5/16/S3800/S38	8063600	
								10			IE-FKFDSY4.029-10/16/S3800/S38	8063601	
	Industrial Ethernet female, angled, M12 Back wall-mounting Sercos shielded	4	D	250V	4 A		2		Metal, CuZn, nickel-plated	M16x1.5	IE-WFKFDSY4.029-2/16/S3800/S38	8063602	
								5			IE-WFKFDSY4.029-5/16/S3800/S38	8063603	
								10			IE-WFKFDSY4.029-10/16/S3800/S38	8063604	
	Profibus female, angled, M12 Back wall-mounting Print contact shielded	5	B	60V	4 A			1,0...2,5	Metal, CuZn, nickel-plated	M12x1	PB-WFKFSW5-P/12/S3525	8050279	
								2,5...4,0			PB-WFKFSW5-P/12/S3540	8050280	
								4,0...5,0			PB-WFKFSW5-P/12/S3550	8050281	
	Profibus female, straight, M12 Back wall-mounting Wire contact	5	B	60V	4 A		0.50		Metal, CuZn, nickel-plated	M16x1.5	PB-FHM12KUB2.012-0,5/M16	8072599	
	Profibus female, straight, M12 Back wall-mounting Print contact	5	B	60V	4 A						M16x1.5	PB-FHM12KUB5-P/M16	8072611
	Profibus male, straight, M12 Back wall-mounting Wire contact	5	B	60V	4 A		0.50				M16x1.5	PB-FHM12SUB2.012-0,5/M16	8072633
	Profibus female, straight, M12 Front wall-mounting Wire contact	5	B	60V	4 A		0.50		Metal, CuZn, nickel-plated	M16x1.5	PB-FVM12KUB2.012-0,5/M16	8072602	
	Profibus female, straight, M12 Front wall-mounting, positionable Wire contact	5	B	60V	4 A		0.50				M16x1.5	PB-FVM12KUB2.012-0,5/M16/S520	8077910
	Profibus male, straight, M12 Front wall-mounting Wire contact	5	B	60V	4 A		0.50				M16x1.5	PB-FVM12SUB2.012-0,5/M16	8072634
	Profibus male, straight, M12 Front wall-mounting, positionable Wire contact	5	B	60V	4 A		0.50		Metal, CuZn, nickel-plated	M16x1.5	PB-FVM12SUB2.012-0,5/M16/S520	8077971	

		Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.
	Profibus male, straight, M12 Back wall-mounting Print contact	5	B	60V	4 A	•			Metal, CuZn, nickel-plated	M16x1.5	PB-FHM12SUB4.5-P/M16	8072718
	Profibus male, angled, M12 Back wall-mounting Print contact shielded	5	B	60V	4 A				Metal, CuZn, nickel-plated	M12x1	PB-WFSFSW5-P/12	8045658
	Profibus female, straight, M12 Back wall-mounting PROFIBUS shielded	5	B	60V	4 A	•	2		Metal, CuZn, nickel-plated	M16x1.5	PB-FKFDSW2.012-2/16/S1800	8061882
							5		Metal, CuZn, nickel-plated	M16x1.5	PB-FKFDSW2.012-5/16/S1800	8063617
							10		Metal, CuZn, nickel-plated	M16x1.5	PB-FKFDSW2.012-10/16/S1800	8063618
	Profibus female, angled, M12 Back wall-mounting PROFIBUS shielded	5	B	60V	4 A	•	2		Metal, CuZn, nickel-plated	M16x1.5	PB-WFKFDSW2.012-2/16/S1800	8061881
							5		Metal, CuZn, nickel-plated	M16x1.5	PB-WFKFDSW2.012-5/16/S1800	8063619
							10		Metal, CuZn, nickel-plated	M16x1.5	PB-WFKFDSW2.012-10/16/S1800	8063620
	Profibus female, straight, M12 Front wall-mounting PROFIBUS shielded	5	B	60V	4 A	•	2		Metal, CuZn, nickel-plated	M16x1.5	PB-FKSW2.012-2/16/S1800/S3941	8063621
							5		Metal, CuZn, nickel-plated	M16x1.5	PB-FKSW2.012-5/16/S1800/S3941	8063622
							10		Metal, CuZn, nickel-plated	M16x1.5	PB-FKSW2.012-10/16/S1800/S3941	8063623
	CANopen/DeviceNet female, straight, M12 Front wall-mounting Wire contact	5	A	60V	4 A	•	0.50		Metal, CuZn, nickel-plated	M16x1.5	CD-FVM12KUA5.022-0,5/M16	8085770
	CANopen/DeviceNet male, straight, M12 Front wall-mounting Wire contact	5	A	60V	4 A	•	0.50		Metal, CuZn, nickel-plated	M16x1.5	CD-FVM12SUA5.022-0,5/M16	8085772
	CANopen/DeviceNet female, straight, M12 Back wall-mounting Wire contact	5	A	60V	4 A	•	0.50		Metal, CuZn, nickel-plated	M16x1.5	CD-FHM12KUA5.022-0,5/M16	8085771
	CANopen/DeviceNet male, straight, M12 Back wall-mounting Wire contact	5	A	60V	4 A	•	0.50		Metal, CuZn, nickel-plated	M16x1.5	CD-FHM12SUA5.022-0,5/M16	8085773
	POWER female, straight, M12 Front wall-mounting Wire contact	2+PE	S	630V <sub>AC</sub>  600V <sub>AC(UL)</sub>	12 A	•	0.20	2.5	Metal, CuZn, nickel-plated	M16x1.5	PS-FVM12KU3.002-0,2/M16/S5025	8086643
								1.5	Metal, CuZn, nickel-plated	M16x1.5	PS-FVM12KU3.002-0,2/M16/S5015	8087076
		3+PE	S	630V <sub>AC</sub>  600V <sub>AC(UL)</sub>	12 A	•	0.20	2.5	Metal, CuZn, nickel-plated	M16x1.5	PS-FVM12KU4.155-0,2/M16/S5025	8086188
								1.5	Metal, CuZn, nickel-plated	M16x1.5	PS-FVM12KU4.155-0,2/M16/S5015	8087080










		Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.
	POWER male, straight, M12 Front wall-mounting Wire contact	2+PE	S	630V <sub>AC</sub>  600V <sub>AC(UL)</sub>	12 A	•	0.20	2.5	Metal, CuZn, nickel-plated	M16x1.5	PS-FVM12SU3.002-0,2/M16/S5025	8086644
								1.5	Metal, CuZn, nickel-plated	M16x1.5	PS-FVM12SU3.002-0,2/M16/S5015	8087077
		3+PE	S	630V <sub>AC</sub>  600V <sub>AC(UL)</sub>	12 A	•	0.20	2.5	Metal, CuZn, nickel-plated	M16x1.5	PS-FVM12SU4.155-0,2/M16/S5025	8086189
								1.5	Metal, CuZn, nickel-plated	M16x1.5	PS-FVM12SU4.155-0,2/M16/S5015	8087081
	POWER female, straight, M12 Back wall-mounting Wire contact	2+PE	S	630V <sub>AC</sub>  600V <sub>AC(UL)</sub>	12 A	•	0.20	2.5	Metal, CuZn, nickel-plated	M16x1.5	PS-FHM12KU3.002-0,2/M16/S5025	8086182
								1.5	Metal, CuZn, nickel-plated	M16x1.5	PS-FHM12KU3.002-0,2/M16/S5015	8087074
		3+PE	S	630V <sub>AC</sub>  600V <sub>AC(UL)</sub>	12 A	•	0.20	2.5	Metal, CuZn, nickel-plated	M16x1.5	PS-FHM12KU4.155-0,2/M16/S5025	8086184
								1.5	Metal, CuZn, nickel-plated	M16x1.5	PS-FHM12KU4.155-0,2/M16/S5015	8087078
	POWER male, straight, M12 Back wall-mounting Wire contact	2+PE	S	630V <sub>AC</sub>  600V <sub>AC(UL)</sub>	12 A	•	0.20	2.5	Metal, CuZn, nickel-plated	M16x1.5	PS-FHM12SU3.002-0,2/M16/S5025	8086183
								1.5	Metal, CuZn, nickel-plated	M16x1.5	PS-FHM12SU3.002-0,2/M16/S5015	8087075
		3+PE	S	630V <sub>AC</sub>  600V <sub>AC(UL)</sub>	12 A	•	0.20	2.5	Metal, CuZn, nickel-plated	M16x1.5	PS-FHM12SU4.155-0,2/M16/S5025	8086185
								1.5	Metal, CuZn, nickel-plated	M16x1.5	PS-FHM12SU4.155-0,2/M16/S5015	8087079
	POWER female, straight, M12 Back wall-mounting Print contact	2+PE	S	630V <sub>AC</sub>  600V <sub>AC(UL)</sub>	12 A	•			Metal, CuZn, nickel-plated	M16x1.5	PS-FHM12KU3-P/M16	8086641
		3+PE	S	630V <sub>AC</sub>  600V <sub>AC(UL)</sub>	12 A	•			Metal, CuZn, nickel-plated	M16x1.5	PS-FHM12KU4-P/M16	8086186
	POWER female, straight, M12 Back wall-mounting Print contact	2+PE	S	630V <sub>AC</sub>  600V <sub>AC(UL)</sub>	12 A	•			Metal, CuZn, nickel-plated	M16x1.5	PS-FHM12SU3-P/M16	8086642
		3+PE	S	630V <sub>AC</sub>  600V <sub>AC(UL)</sub>	12 A	•			Metal, CuZn, nickel-plated	M16x1.5	PS-FHM12SU4-P/M16	8086187
	POWER female, straight, M12 Front wall-mounting Wire contact	4	T	63V <sub>bc</sub>	12 A	•	0.20	2.5	Metal, CuZn, nickel-plated	M16x1.5	PT-FVM12KU4-0,2/M16/S5025	8086194
								1.5	Metal, CuZn, nickel-plated	M16x1.5	PT-FVM12KU4-0,2/M16/S5015	8087084
	POWER male, straight, M12 Front wall-mounting Wire contact	4	T	63V <sub>bc</sub>	12 A	•	0.20	2.5	Metal, CuZn, nickel-plated	M16x1.5	PT-FVM12SU4-0,2/M16/S5025	8086195
								1.5	Metal, CuZn, nickel-plated	M16x1.5	PT-FVM12SU4-0,2/M16/S5015	8087085
	POWER female, straight, M12 Back wall-mounting Wire contact	4	T	63V <sub>bc</sub>	12 A	•	0.20	2.5	Metal, CuZn, nickel-plated	M16x1.5	PT-FHM12KU4-0,2/M16/S5025	8086190
								1.5	Metal, CuZn, nickel-plated	M16x1.5	PT-FHM12KU4-0,2/M16/S5015	8087082
	POWER male, straight, M12 Back wall-mounting Wire contact	4	T	63V <sub>bc</sub>	12 A	•	0.20	2.5	Metal, CuZn, nickel-plated	M16x1.5	PT-FHM12SU4-0,2/M16/S5025	8086191
								1.5	Metal, CuZn, nickel-plated	M16x1.5	PT-FHM12SU4-0,2/M16/S5015	8087083
	POWER female, straight, M12 Back wall-mounting Print contact	4	T	63V <sub>bc</sub>	12 A	•			Metal, CuZn, nickel-plated	M16x1.5	PT-FHM12KU4-P/M16	8086192
	POWER male, straight, M12 Back wall-mounting Print contact	4	T	63V <sub>bc</sub>	12 A	•			Metal, CuZn, nickel-plated	M16x1.5	PT-FHM12SU4-P/M16	8086193

		Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.
	POWER female, straight, M12 Front wall-mounting Wire contact	4	L	63V <sub>dc</sub>	12 A	•	0.20	2.5	Metal, CuZn, nickel-plated	M16x1.5	PL-FVM12KU4-0,2/M16/S5025	8086638
								1.5			PL-FVM12KU4-0,2/M16/S5015	8087068
		4+FE	L	63V <sub>dc</sub>	16 A	•	0.20	2.5	Metal, CuZn, nickel-plated	M16x1.5	PL-FVM12KU5.269-0,2/M16/S5025	8086180
								1.5			PL-FVM12KU5.269-0,2/M16/S5015	8087073
	POWER male, straight, M12 Front wall-mounting Wire contact	4	L	63V <sub>dc</sub>	12 A	•	0.20	2.5	Metal, CuZn, nickel-plated	M16x1.5	PL-FVM12SU4-0,2/M16/S5025	8086639
								1.5			PL-FVM12SU4-0,2/M16/S5015	8087069
		4+FE	L	63V <sub>dc</sub>	16 A	•	0.20	2.5	Metal, CuZn, nickel-plated	M16x1.5	PL-FVM12SU5.269-0,2/M16/S5025	8086181
								1.5			PL-FVM12SU5.269-0,2/M16/S5015	8087072
	POWER female, straight, M12 Back wall-mounting Wire contact	4	L	63V <sub>dc</sub>	12 A	•	0.20	2.5	Metal, CuZn, nickel-plated	M16x1.5	PL-FHM12KU4-0,2/M16/S5025	8086175
								1.5			PL-FHM12KU4-0,2/M16/S5015	8087066
		4+FE	L	63V <sub>dc</sub>	16 A	•	0.20	2.5	Metal, CuZn, nickel-plated	M16x1.5	PL-FHM12KU5.269-0,2/M16/S5025	8086177
								1.5			PL-FHM12KU5.269-0,2/M16/S5015	8087070
	POWER male, straight, M12 Back wall-mounting Wire contact	4	L	63V <sub>dc</sub>	12 A	•	0.20	2.5	Metal, CuZn, nickel-plated	M16x1.5	PL-FHM12SU4-0,2/M16/S5025	8086176
								1.5			PL-FHM12SU4-0,2/M16/S5015	8087067
		4+FE	L	63V <sub>dc</sub>	16 A	•	0.20	2.5	Metal, CuZn, nickel-plated	M16x1.5	PL-FHM12SU5.269-0,2/M16/S5025	8086178
								1.5			PL-FHM12SU5.269-0,2/M16/S5015	8087071
	POWER female, straight, M12 Back wall-mounting Print contact	4	L	63V <sub>dc</sub>	16 A	•			Metal, CuZn, nickel-plated	M16x1.5	PL-FHM12KU4-P/M16	8086636
		4+FE	L	63V <sub>dc</sub>	16 A	•					PL-FHM12KU5-P/M16	8086640
	POWER male, straight, M12 Back wall-mounting Print contact	4	L	63V <sub>dc</sub>	16 A	•			Metal, CuZn, nickel-plated	M16x1.5	PL-FHM12SU4-P/M16	8086637
		4+FE	L	63V <sub>dc</sub>	16 A	•					PL-FHM12SU5-P/M16	8086179
	POWER female, straight, M12 Front wall-mounting Wire contact	4+PE	K	630V <sub>Ac</sub>  600V <sub>Ac(UL)</sub>	12 A	•	0.20	2.5	Metal, CuZn, nickel-plated	M16x1.5	PK-FVM12KU5.244-0,2/M16/S5025	8086173
								1.5			PK-FVM12KU5.244-0,2/M16/S5015	8087065
	POWER male, straight, M12 Front wall-mounting Wire contact	4+PE	K	630V <sub>Ac</sub>  600V <sub>Ac(UL)</sub>	12 A	•	0.20	2.5	Metal, CuZn, nickel-plated	M16x1.5	PK-FVM12SU5.244-0,2/M16/S5025	8086174
								1.5			PK-FVM12SU5.244-0,2/M16/S5015	8087064
	POWER female, straight, M12 Back wall-mounting Wire contact	4+PE	K	630V <sub>Ac</sub>  600V <sub>Ac(UL)</sub>	12 A	•	0.20	2.5	Metal, CuZn, nickel-plated	M16x1.5	PK-FHM12KU5.244-0,2/M16/S5025	8086169
								1.5			PK-FHM12KU5.244-0,2/M16/S5015	8087062
	POWER male, straight, M12 Back wall-mounting Wire contact	4+PE	K	630V <sub>Ac</sub>  600V <sub>Ac(UL)</sub>	12 A	•	0.20	2.5	Metal, CuZn, nickel-plated	M16x1.5	PK-FHM12SU5.244-0,2/M16/S5025	8086170
								1.5			PK-FHM12SU5.244-0,2/M16/S5015	8087063
	POWER female, straight, M12 Back wall-mounting Print contact	4+PE	K	630V <sub>Ac</sub>  600V <sub>Ac(UL)</sub>	12 A	•			Metal, CuZn, nickel-plated	M16x1.5	PK-FHM12KU5-P/M16	8086171

		Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.	
	POWER male, straight, M12 Back wall-mounting Print contact	4+PE	K	630V <sub>AC</sub>  600V <sub>AC(UL)</sub>	12 A	•			Metal, CuZn, nickel-plated	M16x1.5	PK-FHM12SU5-P/M16	8086172	
	Sensor/actuator female, straight, M8 Front wall-mounting Wire contact	3	A	60V	4 A	•	0.20	2,0...5,0	Stainless steel 1.4404	M8x0,5	AL-FVM8EKUA3-0,2/M8	8084376	
								2,0...5,0	Metal, CuZn, nickel-plated	M8x0,5	AL-FVM8KUA3-0,2/M8	8071345	
		4	A	60V	4 A	•	0.20	2,0...5,0	2,0...5,0	Stainless steel 1.4404	M8x0,5	AL-FVM8EKUA4-0,2/M8	8084377
									2,0...5,0	Metal, CuZn, nickel-plated	M8x0,5	AL-FVM8KUA4-0,2/M8	8071346
	Sensor/actuator male, straight, M8 Front wall-mounting Wire contact	3	A	60V	4 A	•	0.20	2,0...5,0	Stainless steel 1.4404	M8x0,5	AL-FVM8EKUB4.5-0,2/M8	8084378	
								2,0...5,0	Metal, CuZn, nickel-plated	M8x0,5	AL-FVM8KUB4.5-0,2/M8	8071347	
		4	A	60V	4 A	•	0.20	2,0...5,0	2,0...5,0	Stainless steel 1.4404	M8x0,5	AL-FVM8ESUA3-0,2/M8	8084382
									2,0...5,0	Metal, CuZn, nickel-plated	M8x0,5	AL-FVM8SUA3-0,2/M8	8071417
	Sensor/actuator female, straight, M8 Back wall-mounting Wire contact	4	A	60V	4 A	•	0.20	2,0...5,0	Stainless steel 1.4404	M8x0,5	AL-FVM8ESUA4-0,2/M8	8084383	
								2,0...5,0	Metal, CuZn, nickel-plated	M8x0,5	AL-FVM8SUA4-0,2/M8	8071419	
		5	B	30V	3 A	•	0.20	2,0...5,0	2,0...5,0	Stainless steel 1.4404	M8x0,5	AL-FVM8ESUB4.5-0,2/M8	8084384
									2,0...5,0	Metal, CuZn, nickel-plated	M8x0,5	AL-FVM8SUB4.5-0,2/M8	8071420
	Sensor/actuator male, straight, M8 Back wall-mounting Wire contact	3	A	60V	4 A	•	0.20	3,0...6,0	Stainless steel 1.4404	M10x1	AL-FVM8EKUA3-0,2/M10	8084379	
								3,0...6,0	Metal, CuZn, nickel-plated	M10x1	AL-FVM8KUA3-0,2/M10	8071402	
		4	A	60V	4 A	•	0.20	3,0...6,0	3,0...6,0	Stainless steel 1.4404	M10x1	AL-FVM8EKUA4-0,2/M10	8084380
									3,0...6,0	Metal, CuZn, nickel-plated	M10x1	AL-FVM8KUA4-0,2/M10	8071405
	Sensor/actuator female, straight, M8 Back wall-mounting Print contact	5	B	30V	3 A	•	0.20	3,0...6,0	Stainless steel 1.4404	M10x1	AL-FVM8EKUB4.5-0,2/M10	8084381	
								3,0...6,0	Metal, CuZn, nickel-plated	M10x1	AL-FVM8KUB4.5-0,2/M10	8071406	
		3	A	60V	4 A	•	0.20	2,0...4,5	2,0...4,5	Stainless steel 1.4404	M8x1	AL-FHM8ESUA3-0,2/M8	8084385
									2,0...4,5	Metal, CuZn, nickel-plated	M8x1	AL-FHM8SUA3-0,2/M8	8071421
	Sensor/actuator male, straight, M8 Back wall-mounting Wire contact	4	A	60V	4 A	•	0.20	2,0...4,5	Stainless steel 1.4404	M8x1	AL-FHM8ESUA4-0,2/M8	8084386	
								2,0...4,5	Metal, CuZn, nickel-plated	M8x1	AL-FHM8SUA4-0,2/M8	8071422	
		5	B	30V	3 A	•	0.20	2,0...4,5	2,0...4,5	Stainless steel 1.4404	M8x1	AL-FHM8ESUB4.5-0,2/M8	8084387
									2,0...4,5	Metal, CuZn, nickel-plated	M8x1	AL-FHM8SUB4.5-0,2/M8	8071423
	Sensor/actuator female, straight, M8 Back wall-mounting Wire contact	3	A	60V	4 A	•		3,0...6,0	Stainless steel 1.4404	M10x1	AL-FHM8EKUA3-P/M10	8084388	
								3,0...6,0	Metal, CuZn, nickel-plated	M10x1	AL-FHM8KUA3-P/M10	8073385	
		4	A	60V	4 A	•		3,0...6,0	3,0...6,0	Stainless steel 1.4404	M10x1	AL-FHM8EKUA4-P/M10	8084389
									3,0...6,0	Metal, CuZn, nickel-plated	M10x1	AL-FHM8KUA4-P/M10	8073386
		5	B	30V	3 A	•		3,0...6,0	Stainless steel 1.4404	M10x1	AL-FHM8EKUB4.5-P/M10	8084390	
								3,0...6,0	Metal, CuZn, nickel-plated	M10x1	AL-FHM8KUB4.5-P/M10	8073387	

		Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.	
	Sensor/actuator male, straight, M8 Back wall-mounting Print contact	3	A	60V	4 A	•		2,0...4,5	Stainless steel 1.4404	M8x1	AL-FHM8ESUA3-P/M8	8084391	
								2,0...4,5	Metal, CuZn, nickel-plated	M8x1	AL-FHM8SUA3-P/M8	8073397	
		4	A	60V	4 A	•			2,0...4,5	Stainless steel 1.4404	M8x1	AL-FHM8ESUA4-P/M8	8084392
									2,0...4,5	Metal, CuZn, nickel-plated	M8x1	AL-FHM8SUA4-P/M8	8073398
		5	B	30V	3 A	•			2,0...4,5	Stainless steel 1.4404	M8x1	AL-FHM8ESUB4.5-P/M8	8084393
									2,0...4,5	Metal, CuZn, nickel-plated	M8x1	AL-FHM8SUB4.5-P/M8	8073399
	Sensor/actuator female, straight, M8 Back wall-mounting Print contact shielded	3	A	60V	4 A	•			Metal, CuZn, nickel-plated	M10x1	AL-FHM8KSA3-P/M10	8073389	
		4	A	60V	4 A	•			Metal, CuZn, nickel-plated	M10x1	AL-FHM8KSA4-P/M10	8073390	
		5	B	30V	3 A	•			Metal, CuZn, nickel-plated	M10x1	AL-FHM8KSB4.5-P/M10	8073391	
	Sensor/actuator male, straight, M8 Back wall-mounting Print contact shielded	3	A	60V	4 A	•			Metal, CuZn, nickel-plated	M8x1	AL-FHM8SSA3-P/M8	8073400	
		4	A	60V	4 A	•			Metal, CuZn, nickel-plated	M8x1	AL-FHM8SSA4-P/M8	8073401	
		5	B	30V	3 A	•			Metal, CuZn, nickel-plated	M8x1	AL-FHM8SSB4.5-P/M8	8073402	
	Sensor/actuator female, angled, M8 Back wall-mounting Print contact shielded	3	A	60V	4 A	•			Metal, CuZn, nickel-plated	M10x1	AL-WFHM8KSA3-P/M10	8088510	
		4	A	60V	4 A	•			Metal, CuZn, nickel-plated	M10x1	AL-WFHM8KSA4-P/M10	8088511	
		5	B	30V	3 A	•			Metal, CuZn, nickel-plated	M10x1	AL-WFHM8KSB4.5-P/M10	8088512	
	Sensor/actuator male, angled, M8 Back wall-mounting Print contact shielded	3	A	60V	4 A	•			Metal, CuZn, nickel-plated	M8x1	AL-WFHM8SSA3-P/M8	8088515	
		4	A	60V	4 A	•			Metal, CuZn, nickel-plated	M8x1	AL-WFHM8SSA4-P/M8	8088516	
		5	B	30V	3 A	•			Metal, CuZn, nickel-plated	M8x1	AL-WFHM8SSB4.5-P/M8	8088517	
	male, M8/Ø8mm snap Soldering contact	3		60V	4 A						SESP3SL	8008157	
		4		60V	4 A						SESP4SL	8037479	
	female, Ø8mm snap Print contact	3		60V	4 A						EKP3SP	8009728	
		4		60V	4 A						EKP4SP	8009729	
		5		30V	3 A						EKP4.5SP	8043797	
	male, Ø8mm snap Print contact	4		60V	4 A						ESP4SP	8036657	
		5		30V	3 A						ESP5SP	8089243	
	male, Ø8mm snap Soldering contact	3		60V	4 A						ESP3SL	8008163	
		4		60V	4 A						ESP4S	8008164	
		5		30V	3 A						ESP5SL	8089106	
	male, Ø8mm snap Print contact	3		60V	4 A						ESHP3P	8008159	
		4		60V	4 A						ESHP4P	8008160	
	male, Ø8mm snap Soldering contact	3		60V	4 A						ESHP3L	8008161	
		4		60V	4 A						ESHP4L	8008162	
	male, M8/Ø8mm snap Print contact	3		60V	4 A						ESGP3P	8008742	
		4		60V	4 A						ESGP4P	8008743	



		Pins	Cod.	U[max]	I[max]	UL	L [m]	Δh[mm]	Receptacle housing material	Fastening thread	Item description	Item-No.
	male, M8/Ø8mm snap Soldering contact	3		60V	4 A						ESGP3L	8008744
		4		60V	4 A						ESGP4L	8008745
	Industrial Ethernet female, straight, M8 Back wall-mounting Print contact shielded	4	D	50V <sub>AC</sub>   60V <sub>DC</sub>	4 A				Metal, CuZn, nickel-plated	M10x1	IE-FHM8KSD4-P/M10	8089337
	Industrial Ethernet male, straight, M8 Back wall-mounting Print contact shielded	4	D	50V <sub>AC</sub>   60V <sub>DC</sub>	4 A				Metal, CuZn, nickel-plated	M8x1	IE-FHM8SSD4-P/M8	8089338
	Industrial Ethernet female, angled, M8 Back wall-mounting Print contact shielded	4	D	50V <sub>AC</sub>   60V <sub>DC</sub>	4 A				Metal, CuZn, nickel-plated	M10x1	IE-WFHM8KSD4-P/M10	8089339
	Industrial Ethernet male, angled, M8 Back wall-mounting Print contact shielded	4	D	50V <sub>AC</sub>   60V <sub>DC</sub>	4 A				Metal, CuZn, nickel-plated	M8x1	IE-WFHM8SSD4-P/M8	8089340
	Industrial Ethernet female, straight, M8 Back wall-mounting Print contact shielded	4	P	50V <sub>AC</sub>   60V <sub>DC</sub>	4 A				Metal, CuZn, nickel-plated	M10x1	IE-FHM8KSP4-P/M10	8089341
	Industrial Ethernet male, straight, M8 Back wall-mounting Print contact shielded	4	P	50V <sub>AC</sub>   60V <sub>DC</sub>	4 A				Metal, CuZn, nickel-plated	M8x1	IE-FHM8SSP4-P/M8	8089342
	Industrial Ethernet female, angled, M8 Back wall-mounting Print contact shielded	4	P	50V <sub>AC</sub>   60V <sub>DC</sub>	4 A				Metal, CuZn, nickel-plated	M10x1	IE-WFHM8KSP4-P/M10	8089343
	Industrial Ethernet male, angled, M8 Back wall-mounting Print contact shielded	4	P	50V <sub>AC</sub>   60V <sub>DC</sub>	4 A				Metal, CuZn, nickel-plated	M8x1	IE-WFHM8SSP4-P/M8	8089344

Nomenclature

PB- W WAK C S E W 3- K

Connection K: Screw-terminal | S: Insulation displacement contact | L: Soldering

Pins

Coding

V4A locking mechanism

Shielded

Field-wireable

WAK: M12x1 female | WAS: M12 male | KP: M8 female | SP: M8 male | RJ45S: RJ45 male

W: angled | without: straight

Product line PB: Profibus | IE: Industrial Ethernet | S: M8 Screw-type












Field-wireable connectors

































## Field-wireable connectors

Technical data	M12	M12 shielded	M8	M23	RJ45
Insulation resistance	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$
Resistance	$\leq 5 m\Omega$	$\leq 5 m\Omega$	$\leq 5 m\Omega$	$\leq 5 m\Omega$	$\leq 5 m\Omega$
Ambient temperature product	-40°C...+85°C	-40°C...+85°C	-40°C...+85°C	-40°C...+125°C	-40°C...+70°C
Contact material	Metal, gold-plated	Metal, gold-plated	Metal, gold-plated	Metal, gold-plated	Metal, gold-plated
Contact-carrier material	Plastic, PA	Plastic, PA	Plastic, PA	Plastic, PBT	Plastic, PA
Grip body material	Plastic	Zinc die-cast, nickel-plated	Plastic	Plastic	Plastic
Coupling nut material	Metal, nickel-plated	Metal, nickel-plated	Metal, nickel-plated	Metal, nickel-plated	
Standards	IEC 61076-2-101	IEC 61076-2-101	IEC 61076-2-104		IEC 60603-7-5
Degree of protection (mounted)	IP67	IP67	IP67		IP20
Mechanical life-cycle	>100 mating cycles	>100 mating cycles	>100 mating cycles	>100 mating cycles	>750 mating cycles
Degree of pollution	3	3 (8X: 2)	3	3	1

		Body						
		Pins	U[max]	I[max]	Cable outlet	Connecting cross-section	Item description	Item-No.
	Field-wireable connector female, straight, M12 Screw-/clamp contact	4, A	250V	4A	4...6 mm	max. 0.75 mm <sup>2</sup>	WAKC4K	8004811
		5, A	125V	4A	4...6 mm	max. 0.75 mm <sup>2</sup>	WAKC5K	8004815
		8, A	60V	2A	6...8 mm	max. 0.5 mm <sup>2</sup>	WAKC8K	8021862
	Field-wireable connector female, straight, M12 Screw-/clamp contact Stainless steel	5, A	125V	4A	4...6 mm	max. 0.75 mm <sup>2</sup>	WAKCE5K	8063393
	Field-wireable connector female, angled, M12 Screw-/clamp contact	4, A	250V	4A	4...6 mm	max. 0.75 mm <sup>2</sup>	WWAKC4K	8004808
		5, A	125V	4A	4...6 mm	max. 0.75 mm <sup>2</sup>	WWAKC5K	8004809
		8, A	30V	2A	6...8 mm	max. 0.25 mm <sup>2</sup>	WWAKC8K	8041146
	Field-wireable connector female, angled, M12 Screw-/clamp contact Stainless steel	5, A	125V	4A	4...6 mm	max. 0,75 mm <sup>2</sup>	WWAKCE5K	8063395
	Field-wireable connector male, straight, M12 Screw-/clamp contact	4, A	250V	4A	4...6 mm	max. 0.75 mm <sup>2</sup>	WASC4K	8004804
		5, A	125V	4A	4...6 mm	max. 0.75 mm <sup>2</sup>	WASC5K	8004805
		8, A	60V	2A	6...8 mm	max. 0.5 mm <sup>2</sup>	WASC8K	8021863
	Field-wireable connector male, straight, M12 Screw-/clamp contact Stainless steel	5, A	125V	4A	4...6 mm	max. 0.75 mm <sup>2</sup>	WASCE5K	8063394
	Field-wireable connector male, angled, M12 Screw-/clamp contact	4, A	250V	4A	4...6 mm	max. 0.75 mm <sup>2</sup>	WWASC4K	8004806
		5, A	125V	4A	4...6 mm	max. 0.75 mm <sup>2</sup>	WWASC5K	8004807
		8, A	30V	2A	6...8 mm	max. 0.75 mm <sup>2</sup>	WWASC8K	8052219
	Field-wireable connector male, angled, M12 Screw-/clamp contact Stainless steel	5, A	125V	4A	4...6 mm	max. 0,75 mm <sup>2</sup>	WWASCE5K	8063396
	Field-wireable connector female, straight, M12 Insulation displacement contact	3, A	32V	4A	2,9...5,1 mm	0.14...0.34 mm <sup>2</sup>   AWG26...22	WAKC3S	8019714
		4, A	32V	4A	2,9...5,1 mm	0.14...0.34 mm <sup>2</sup>   AWG26...22	WAKC4S	8019718
	Field-wireable connector female, angled, M12 Insulation displacement contact	4, A	32V	4A	4...5,1 mm	max. 0.5 mm <sup>2</sup>	WWAKC4S	8019719
	Field-wireable connector male, straight, M12 Insulation displacement contact	3, A	32V	4A	2,9...5,1 mm	0.14...0.34 mm <sup>2</sup>   AWG26...22	WASC3S	8019712
		4, A	32V	4A	2,9...5,1 mm	0.14...0.34 mm <sup>2</sup>   AWG26...22	WASC4S	8019716

		Body						
		Pins	U[max]	I[max]	Cable outlet	Connecting cross-section	Item description	Item-No.
	Field-wireable connector male, angled, M12 Insulation displacement contact	4, A	32V	4A	4...5,1mm	max. 0.5 mm <sup>2</sup>	WWASC4S	8019717
	Field-wireable connector female, straight, M12 Soldering contact	12, A	30V	1A	6...8 mm	max. 0.25 mm <sup>2</sup>	WAKC12L	8031858
	Field-wireable connector female, angled, M12 Soldering contact	12, A	30V	2A	6...8 mm	max. 0.25 mm <sup>2</sup>	WWAKC12L	8031859
	Field-wireable connector male, straight, M12 Soldering contact	12, A	30V	2A	6...8 mm	max. 0.25 mm <sup>2</sup>	WASC12L	8031860
	Field-wireable connector male, angled, M12 Soldering contact	12, A	30V	2A	6...8 mm	max. 0.25 mm <sup>2</sup>	WWASC12L	8031861
	Field-wireable connector female, straight, M12 shielded Screw-/clamp contact	4, A	250V	4A	5...8 mm	max. 0.75 mm <sup>2</sup>	WAKCS4K	8068908
		5, A	125V	4A	5...8 mm	max. 0.75 mm <sup>2</sup>	WAKCS5K	8068910
		8, A	60V	2A	6...8 mm	max. 0,50 mm <sup>2</sup>	WAKCS8K	8035193
	Field-wireable connector male, straight, M12 shielded Screw-/clamp contact	4, A	250V	4A	5...8 mm	max. 0.75 mm <sup>2</sup>	WASCS4K	8068909
		5, A	60V	4A	5...8 mm	max. 0,75 mm <sup>2</sup>	WASCS5K	8068911
		8, A	60V	2A	6...8 mm	max. 0.5 mm <sup>2</sup>	WASCS8K	8035192
	Field-wireable connector female, straight, M12 shielded Soldering contact	12, A	30V	2A	6...8 mm	max. 0.25 mm <sup>2</sup>	WAKCS12L	8052220
	Field-wireable connector male, straight, M12 shielded Soldering contact	12, A	30V	2A	6...8 mm	max. 0.25 mm <sup>2</sup>	WASCS12L	8037435
	Field-wireable connector female, straight, M12 shielded Insulation displacement contact	8, X	50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A	5...9,7 mm	AWG 26/1 - AWG 22/1, AWG 26/7 - AWG 22/7	IE-WAKCSX8S	8086078
	Field-wireable connector male, straight, M12 shielded Insulation displacement contact	4, D	250V	4A	5...9,7 mm	AWG 24/1 - AWG 22/1, AWG 26/7 - AWG 22/7	IE-WASCSY4S	8065954
		8, X	50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A	5...9,7 mm	AWG 26/1 - AWG 22/1, AWG 26/7 - AWG 22/7	IE-WASCSX8S	8050231

		Body						
		Pins	U[max]	I[max]	Cable outlet	Connecting cross-section	Item description	Item-No.
	Field-wireable connector female, straight, M12 shielded Screw-/clamp contact	5, B	125V	4A	6,5...8,5 mm	max. 0.75 mm <sup>2</sup>	PB-WAKCSW4.5K	8031376
	Field-wireable connector female, angled, M12 shielded Screw-/clamp contact	5, B	125V	4A	6...8 mm	max. 0.75 mm <sup>2</sup>	PB-WWAKCSW4.5K	8040235
	Field-wireable connector male, straight, M12 shielded Screw-/clamp contact	5, B	125V	4A	5...8 mm	max. 0.75 mm <sup>2</sup>	PB-WASCSW4.5K	8031375
	Field-wireable connector male, angled, M12 shielded Screw-/clamp contact	5, B	125V	4A	6...8 mm	max. 0.75 mm <sup>2</sup>	PB-WWASCSW4.5K	8040236
	Field-wireable connector female, straight, M12 Screw-/clamp contact	3+PE, S	630V <sub>DC</sub>	12A	8...10 mm	max. 1,50 mm <sup>2</sup>	PS-WAKC4K	8063400
		4, T	63V <sub>DC</sub>	12A	8...10 mm	max. 1,50 mm <sup>2</sup>	PT-WAKC4K	8063398
		5, K	630V <sub>DC</sub>	12A	8...13 mm	max. 2,5 mm <sup>2</sup>	PK-WAKC5K	8086298
		5, L	63V <sub>DC</sub>	16A	8...13 mm	max. 2,5 mm <sup>2</sup>	PL-WAKC5K	8086300
	Field-wireable connector male, straight, M12 Screw-/clamp contact	3+PE, S	630V <sub>DC</sub>	12A	8...10 mm	max. 1,50 mm <sup>2</sup>	PS-WASC4K	8063399
		4, T	63V <sub>DC</sub>	12A	8...10 mm	max. 1,50 mm <sup>2</sup>	PT-WASC4K	8063397
		5, K	630V <sub>DC</sub>	12A	8...13 mm	max. 2,5 mm <sup>2</sup>	PK-WASC5K	8086297
		5, L	63V <sub>DC</sub>	16A	8...13 mm	max. 2,5 mm <sup>2</sup>	PL-WASC5K	8086299
	Field-wireable connector male, Duo sealed, straight, M12 Screw-/clamp contact	4, A	250V	4A	2 x Ø 2,1-3 mm   Ø 4-5 mm	0.75 mm <sup>2</sup>   AWG18	FSMC4K	8017231
		5, A	125V	4A	2 x Ø 2,1-3 mm   Ø 4-5 mm	0.75 mm <sup>2</sup>   AWG18	FSMC5K	8032825
	Field-wireable connector female, straight, M8 Screw-/clamp contact	3	60V	4A	3,5...5 mm	max. 0.5 mm <sup>2</sup>	SKPC3K	8004833
		4	30V	4A	3,5...5 mm	max. 0.5 mm <sup>2</sup>	SKPC4K	8004834
	Field-wireable connector male, straight, M8 Screw-/clamp contact	3	60V	4A	3,5...5 mm	max. 0.5 mm <sup>2</sup>	SSPC3K	8004831
		4	30V	4A	3,5...5 mm	max. 0.5 mm <sup>2</sup>	SSPC4K	8004832
	Field-wireable connector female, straight, M8 Insulation displacement contact	3	32V	4A	2,5...5,1 mm	0.14...0.34 mm <sup>2</sup>   AWG26...22	SKPC3S	8019721
		4	32V	4A	2,5...5,1 mm	0.14...0.34 mm <sup>2</sup>   AWG26...22	SKPC4S	8019723
	Field-wireable connector male, straight, M8 Insulation displacement contact	3	32V	4A	2,5...5,1 mm	0.14...0.34 mm <sup>2</sup>   AWG26...22	SSPC3S	8019720
		4	32V	4A	2,5...5,1 mm	0.14...0.34 mm <sup>2</sup>   AWG26...22	SSPC4S	8019722

		Body						
		Pins	U[max]	I[max]	Cable outlet	Connecting cross-section	Item description	Item-No.
	Field-wireable connector female, angled, M8 Soldering contact	3	32V	4A	3,5...5 mm	0.14...0.34 mm <sup>2</sup>   AWG26...22	SWKPC3L	8017351
		4	30V	4A	3.5...5 mm	max. 0.25 mm <sup>2</sup>	SWKPC4L	8017364
	Field-wireable connector male, angled, M8 Soldering contact	3	60V	4A	3,5...5 mm	max. 0.25 mm <sup>2</sup>	SWSPC3L	8017365
		4	30V	4A	3,5...5 mm	max. 0.25 mm <sup>2</sup>	SWSPC4L	8017366
	Field-wireable connector female, straight, M23 Soldering contact	12	150V	8A* 4A**	8...12 mm	contacts 10,11,12*: 0,75...1,0 mm <sup>2</sup>   all other**: 0,5...0,75 mm <sup>2</sup>	MKCC12L	8013694
		19	125V	10A* 4A**	10...14 mm	contacts 6,12,19*: 0,75...1,0 mm <sup>2</sup>   all other**: 0,5...0,75 mm <sup>2</sup>	MKCC19L	8013696
	Field-wireable connector female, angled, M23 Soldering contact	12	150V	8A* 4A**	8...12 mm	contacts 9,10,11,12*: 0,75...1,0 mm <sup>2</sup>   all other**: 0,5...0,75 mm <sup>2</sup>	WMKCC12L	8017153
		19	125V	10A* 4A**	10...14 mm	contacts 6,12,19*: 0,75...1,0 mm <sup>2</sup>   all other**: 0,5...0,75 mm <sup>2</sup>	WMKCC19L	8017151
	Field-wireable connector male, straight, RJ45 Insulation displacement contact	8	50V	1A	5,5...10,5 mm	AWG27/7-AWG22/7 (0,46-0,76 mm)   AWG26/1-AWG22/1 (0,40-0,64 mm)	IE-RJ45SCS8	8065955
	Sealing, Field-wireable connector, M12						Set sealing 4-6mm	8061922

Nomenclature of patched connectors

Double-ended cordset


IE-	S	W	WAS	S	C	X	8.066-	L	- IE-	S	W	WAS	S	X	8.066	/ S3500
-----	---	---	-----	---	---	---	--------	---	-------	---	---	-----	---	---	-------	---------

Cable quality  
 Contacts.allocation code  
 X: X-coded | Y: D-coded | P: P-coded  
 Shielded  
 WAS: M12 male | RJ45S: male | SP: M8 male  
 W: angled | without: straight  
 M8 Screw-type  
 Industrial Ethernet  
 Cable length [m]  
 Contacts.allocation code  
 X: X-coded | Y: D-coded | P: P-coded  
 Field-wireable  
 Shielded  
 WAS: M12 male | WAK: M12 female | RJ45S: male | RJ45SL: light | SP: M8 male | SK: M8 female  
 Without: straight | W: angled | for RJ45: W0=0°, W3=90°, W6=180°, W9=270°  
 M8 Screw-type  
 Industrial Ethernet

0° W0    90° W3    180° W6    270° W9

Industrial Ethernet

Cable	Material	UL	Color	Transmission features	Feature	drag chain-adapted	torsion resistant
S3500	PUR/PE	✓	GN	Cat7			
S3800	PUR/FRNC	✓	RD	Cat5e	Sercos	✓	
S2171	PUR/FRNC	✓	GN	Cat5e	PROFINET AWG22/7 Typ C	✓	
S3400	PUR/PP	✓	GN	Cat5		✓	
S4030	PUR/Foam-Skin Polyolefin	✓	GN	Cat7	PROFINET 4x2xAWG24/7 Typ C		✓
S4031	PUR/FRNC	✓	GN	Cat6	PROFINET 4x2xAWG26/19 Typ C	✓	
S5058	PUR/Foam-Skin Polyolefin	✓	BK, with red vertical stripe	Cat5e	EtherCAT P AWG22/7	✓	
S5059	PUR/Foam-Skin Polyolefin	✓	BK, with red vertical stripe	Cat5e	EtherCAT P AWG24/7	✓	
S5100	PUR/PE	✓	GN	Cat5e	PROFINET robotic AWG22/19 Typ R	✓	✓

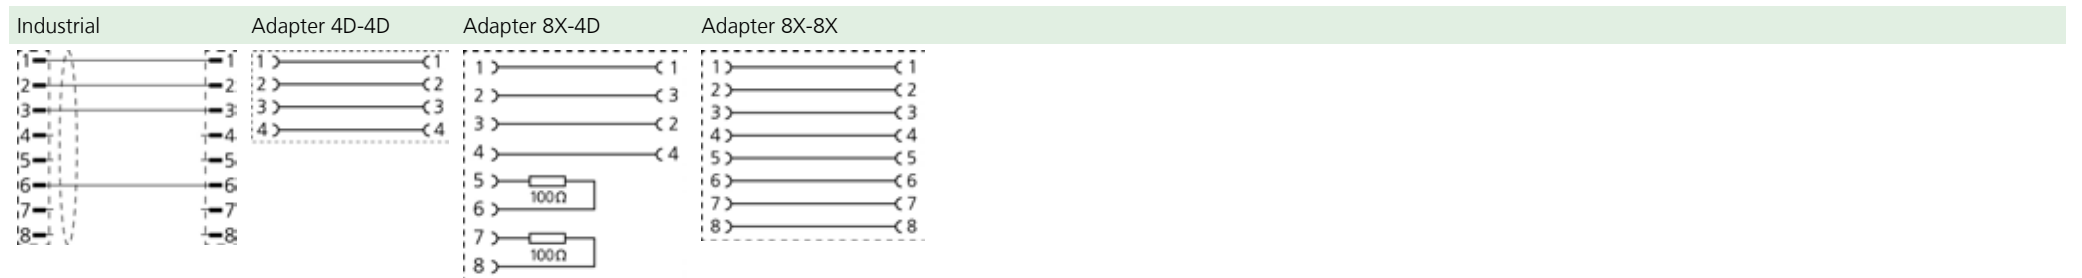














## Industrial Ethernet











Technical data	M12	M8	RJ45	Receptacle
Insulation resistance	≥10 <sup>8</sup> Ω	≥10 <sup>8</sup> Ω	≥10 <sup>8</sup> Ω	≥10 <sup>8</sup> Ω
Resistance	≤ 5mΩ	≤ 5mΩ	≤ 5mΩ	≤ 5mΩ
Ambient temperature product	-30°C...+90°C	-30°C...+90°C	-40°C...+70°C	-30°C...+90°C (* +70°C )
Contact material	Metal, gold-plated	Metal, gold-plated	Metal, gold-plated	Metal, gold-plated
Contact-carrier material	Plastic, TPU	Plastic, PA	Plastic	Plastic
Grip body material	Plastic, TPU	Plastic, TPU	Plastic, TPE	Plastic, TPU
Coupling nut material	Metal, nickel-plated	Metal, nickel-plated		
Sealing (female) material				FPM/FKM
Material of external sealing				NBR
Receptacle housing material				Metal, CuZn, nickel-plated
Standards	IEC 61076-2-101/-109	IEC 61076-2-104	IEC 60603-7-5	IEC 61076-2-101/-109
Degree of protection (mounted)	IP65, IP67, IP68	IP65, IP67, IP68	IP20	IP65, IP67, IP68
Mechanical life-cycle	>100 mating cycles	>100 mating cycles	>750 mating cycles	>100 mating cycles
Degree of pollution	2	3/2	1	3/2

With our Industrial-Ethernet-components we provide a comprehensive system wiring for various Ethernet applications. Due to a broad range of overmolded and field-wireable connectors, receptacles as well as cable-qualities it is possible to build up a reliable and future-proof system. As usual with ESCHA, the products were designed according to HF-aspects through which the specified data-transmission-properties can be 100 percent guaranteed.

		Body				Cable			Item description	L = cable length*		
		Pins	U[max]	I[max]	Δh[mm]	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
	Single-ended cordset female, straight, M12 shielded Cat5e	4, D	250V	4A	PUR	GN	◦	IE-WAKSY4.029-L/S5100	8088951	8088952	8089476	
				4A	PUR	GN	•	IE-WAKSY4.029-L/S2171	8075040	8079563	8080567	
	Single-ended cordset female, angled, M12 shielded Cat5e	4, D	250V	4A	PUR	GN	◦	IE-WWAKSY4.029-L/S5100	8088954	8089276	8089277	
				4A	PUR	GN	•	IE-WWAKSY4.029-L/S2171	8075044	8079564	8081799	
	Single-ended cordset male, straight, M12 shielded Cat5e	4, D	250V	4A	PUR	GN	◦	IE-WASSY4.029-L/S5100	8088138	8088139	8088140	
				4A	PUR	GN	•	IE-WASSY4.029-L/S2171	8031449	8031450	8031451	
				4A	PUR	GN	•	IE-WASSY4.082-L/S3400	8056566	8056567	8056568	
	Single-ended cordset male, angled, M12 shielded Cat5e	4, D	250V	4A	PUR	GN	◦	IE-WWASSY4.029-L/S5100	8088141	8088142	8088143	
				4A	PUR	GN	•	IE-WWASSY4.029-L/S2171	8044087	8041940	8044088	
				4A	PUR	GN	•	IE-WWASSY4.082-L/S3400	8056569	8056570	8056571	
	Field-wireable connector male, straight, M12 shielded Cat5e Insulation displacement contact	4, D	250V	4A				IE-WASCSY4S	8065954			
	Single-ended cordset male, straight, RJ45 shielded Cat5e	4	50V	1A	PUR	GN	•	IE-RJ45SS4.003-L/S2171	8062329	8062330	8062331	
				1A	PUR	GN	•	IE-RJ45SS4.003-L/S5100	8088144	8088145	8088146	
				1A	PUR	GN	•	IE-RJ45SS8.005-L/S3400	8056581	8056582	8056583	
	Single-ended cordset male, angled, RJ45, 0° shielded Cat5e	4	50V	1A	PUR	GN		IE-WORJ45SS8.005-L/S3400	8080677	8080356	8080678	
	Single-ended cordset male, angled, RJ45, 90° shielded Cat5e	4	50V	1A	PUR	GN		IE-W3RJ45SS8.005-L/S3400	8080679	8079038	8080680	
	Single-ended cordset male, angled, RJ45, 180° shielded Cat5e	4	50V	1A	PUR	GN		IE-W6RJ45SS8.005-L/S3400	8080681	8080682	8080683	










\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m. Other cable- and wire lengths are available upon request.

• UL approved | ◦ UL in preparation

		Body				Cable			Item description	L = cable length*		
		Pins	U[max]	I[max]	Δh[mm]	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
	Single-ended cordset male, angled, RJ45, 270° shielded Cat5e	4	50V	1A		PUR	GN		IE-W9RJ45SS8.005-L/S3400	8080684	8080802	8080994
	Field-wireable connector male, straight, RJ45 Cat6A Insulation displacement contact	8	50V	1A					IE-RJ45SCS8	8065955		
	Receptacle Single-ended cordset female, straight, M12 shielded Cat5e Cable Front wall-mounting	4, D	250V	4A		PUR	GN		IE-FKSY4.029-L/16/S2171/S3941	8063614	8063615	8063616
				4A		PUR	GN		IE-FKSY4.029-L/16/S5100/S3941	8088984	8088985	8089428
	Receptacle female, straight, M12 Cat5e Print contact Back wall-mounting	4, D	250V	4A	1,0...2,5			•	IE-FHM12KUD4-P/M12/S3525	8074847		
				4A	2,5...4,0			•	IE-FHM12KUD4-P/M12/S3540	8074846		
				4A	4,0...5,0			•	IE-FHM12KUD4-P/M12/S3550	8072578		
	Receptacle female, angled, M12 shielded Print contact Back wall-mounting	4, D	250V	4A	1,0...2,5			•	IE-WFKFSY4-P/12/S3525	8050282		
				4A	2,5...4,0			•	IE-WFKFSY4-P/12/S3540	8050284		
				4A	4,0...5,0			•	IE-WFKFSY4-P/12/S3550	8050285		
	Receptacle female, straight, M12 Wire contact Back wall-mounting	4, D	250V	4A				•	IE-FHM12KUD4.029-0,5/M16	8072504		
	Receptacle male, straight, M12 Wire contact Back wall-mounting	4, D	250V	4A				•	IE-FHM12SUD4.029-0,5/M16	8072520		
	Receptacle female, straight, M12 Wire contact Front wall-mounting	4, D	250V	4A				•	IE-FVM12KUD4.029-0,5/M16	8072505		
	Receptacle female, straight, M12 Wire contact Front wall-mounting, positionable	4, D	250V	4A				•	IE-FVM12KUD4.029-0,5/M16/S520	8077905		
	Receptacle male, straight, M12 Wire contact Front wall-mounting	4, D	250V	4A				•	IE-FVM12SUD4.029-0,5/M16	8072521		

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m. Other cable- and wire lengths are available upon request.

• UL approved | ◦ UL in preparation

		Body				Cable			UL	Item description	L = cable length*		
		Pins	U[max]	I[max]	Δh[mm]	Material	Color	2m / 1m			5m / 2m	10m / 5m	
	Receptacle male, straight, M12 Wire contact Front wall-mounting, positionable	4, D	250V	4A					•	IE-FVM12SUD4.029-0,5/M16/S520	8077968		
	Receptacle female, straight, M12 Cat5e Print contact Back wall-mounting	4, D	250V	4A	1,0...5,0				•	IE-FHM12KUD4-P/M16	8072576		
	Receptacle male, straight, M12 Cat5e Print contact Back wall-mounting	4, D	250V	4A	1,0...5,0				•	IE-FHM12SUD4-P/M16	8072586		
	Receptacle Single-ended cordset female, straight, M12 shielded Cat5e Cable Back wall-mounting	4, D	250V	4A		PUR	GN			IE-FKFDSY4.029-L/16/S2171	8063608	8063609	8063610
				4A		PUR	GN			IE-FKFDSY4.029-L/16/S5100	8088147	8088148	8088149
				4A		PUR	GN			IE-FKFDSY4.082-L/16/S3400	8064034	8064035	8064036
	Receptacle Single-ended cordset female, angled, M12 shielded Cat5e Cable Back wall-mounting	4, D	250V	4A		PUR	GN			IE-WFKFDSY4.029-L/16/S2171	8063611	8063612	8063613
				4A		PUR	GN			IE-WFKFDSY4.029-L/16/S5100	8088150	8088151	8088152
	Single-ended cordset male, straight, M8 shielded Cat5e	4	60V	4A		PUR	GN		•	IE-SSPS4.027-L/S3400	8055529	8055530	8055531
	Single-ended cordset male, angled, M8 shielded Cat5e	4	60V	4A		PUR	GN		•	IE-SWSPS4.027-L/S3400	8055789	8055790	8055791
	Double-ended cordset female, straight, M12 shielded Cat5e	4, D	250V	4A		PUR	GN		◦	IE-WAKSY4.029-L-IE-WASSY4.029/S5100	8088168	8088169	8088170
		4, D		4A		PUR	GN		•	IE-WAKSY4.029-L-IE-WASSY4.029/S2171	8080564	8080565	8080566
	Double-ended cordset female, straight, M12 shielded Cat5e	4, D	250V	4A		PUR	GN		◦	IE-WAKSY4.029-L-IE-WWASSY4.029/S5100	8088171	8088172	8088173
		4, D		4A		PUR	GN		•	IE-WAKSY4.029-L-IE-WWASSY4.029/S2171	8081796	8075047	8081791







\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m. Other cable- and wire lengths are available upon request.

• UL approved | ◦ UL in preparation

		Body				Cable			Item description	L = cable length*		
		Pins	U[max]	I[max]	Δh[mm]	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
	Double-ended cordset female, angled, M12 male, straight, M12 shielded Cat5e	4, D 4, D	250V	4A		PUR	GN	◦	IE-WWAKSY4.029-L-IE-WASSY4.029/S5100	8088174	8088175	8088176
	Double-ended cordset female, angled, M12 male, angled, M12 shielded Cat5e	4, D 4, D	250V	4A		PUR	GN	◦	IE-WWAKSY4.029-L-IE-WWASSY4.029/S5100	8088177	8088178	8088179
	Double-ended cordset male, straight, M12 male, straight, M12 shielded Cat5e	4, D 4, D	60V	4A		PUR	GN	◦	IE-WASSY4.029-L-IE-WASSY4.029/S5100	8088153	8088154	8088155
				4A		PUR	GN	•	IE-WASSY4.029-L-IE-WASSY4.029/S2171	8031558	8031560	8031561
				4A		PUR	GN	•	IE-WASSY4.082-L-IE-WASSY4.082/S3400	8056557	8056558	8056559
	Double-ended cordset male, straight, M12 male, straight, RJ45 shielded Cat5e	4, D 4	50V	1A		PUR	GN	◦	IE-WASSY4.029-L-IE-RJ45SS4.003/S5100	8088162	8088163	8088164
				1A		PUR	GN	•	IE-WASSY4.029-L-IE-RJ45SS4.003/S2171	8061081	8061082	8061083
				1A		PUR	GN	•	IE-WASSY4.082-L-IE-RJ45SS8.005/S3400	8056572	8056573	8056574
	Double-ended cordset male, straight, M12 male, straight, M8 shielded Cat5e	4, D 4	60V	4A		PUR	GN		IE-WASSY4.082-L-IE-SSPS4.027/S3400	8055552	8055553	8055554
	female, straight, M12 male, straight, RJ45 Cat5e	4, D	50V	1A		PUR	GN	◦	IE-FKFDSY4.029-L-IE-RJ45SS4.003/S2171	8064023	8064024	8064025
				1A		PUR	GN	•	IE-FKFDSY4.029-L-IE-RJ45SS4.003/S5100	8089267	8088945	8088946
				1A		PUR	GN	•	IE-FKFDSY4.082-L-IE-RJ45SS8.005/S3400	8060876	8063625	8063626
	Receptacle Double-ended cordset female, angled, M12 male, straight, RJ45 shielded Cat5e	4, D	50V	1A		PUR	GN	•	IE-WFKFDSY4.082-L-IE-RJ45SS8.005/S3400	8069853	8069854	8069855
	Double-ended cordset male, angled, M12 male, straight, M12 shielded Cat5e	4, D 4, D	60V	4A		PUR	GN	◦	IE-WWASSY4.029-L-IE-WASSY4.029/S5100	8088156	8088157	8088158
				4A		PUR	GN	•	IE-WWASSY4.029-L-IE-WASSY4.029/S2171	8046398	8044089	8044090
				4A		PUR	GN	•	IE-WWASSY4.082-L-IE-WASSY4.082/S3400	8056563	8056564	8056565









\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m. Other cable- and wire lengths are available upon request.

• UL approved | ◦ UL in preparation

		Body				Cable			Item description	L = cable length*		
		Pins	U[max]	l[max]	Δh[mm]	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
	Double-ended cordset male, angled, M12 male, straight, RJ45 shielded Cat5e	4, D 4	50V	1A		PUR	GN	◦	IE-WWASSY4.029-L-IE-RJ45SS4.003/S5100	8088165	8088166	8088167
				1A		PUR	GN	•	IE-WWASSY4.029-L-IE-RJ45SS4.003/S2171	8062317	8062318	8062319
				1A		PUR	GN	•	IE-WWASSY4.082-L-IE-RJ45SS8.005/S3400	8056575	8056576	8056577
	Double-ended cordset male, angled, M12 male, angled, M12 shielded Cat5e	4, D 4, D	60V	4A		PUR	GN	◦	IE-WWASSY4.029-L-IE-WWASSY4.029/S5100	8088159	8088160	8088161
				4A		PUR	GN	•	IE-WWASSY4.029-L-IE-WWASSY4.029/S2171	8046893	8036902	8036903
				4A		PUR	GN	•	IE-WWASSY4.082-L-IE-WWASSY4.082/S3400	8056560	8056561	8056562
	Double-ended cordset male, straight, RJ45 shielded Cat5e Industrial	4 4	50V	1A		PUR	GN	◦	IE-RJ45SS4.003-L-IE-RJ45SS4.003/S5100	8088974	8089268	8088975
				1A		PUR	GN	•	IE-RJ45SS4.003-L-IE-RJ45SS4.003/S2171	8062323	8062324	8065056
				1A		PUR	GN	•	IE-RJ45SS8.005-L-IE-RJ45SS8.005/S3400	8056578	8056579	8056580
	Double-ended cordset male, angled, RJ45, 0° male, straight, RJ45 shielded Cat5e Industrial	4 4	50V	1A		PUR	GN		IE-W0RJ45SS8.005-L-IE-RJ45SS8.005/S3400	8080803	8080804	8080752
	Double-ended cordset male, angled, RJ45, 90° male, straight, RJ45 shielded Cat5e Industrial	4 4	50V	1A		PUR	GN		IE-W3RJ45SS8.005-L-IE-RJ45SS8.005/S3400	8080805	8080806	8080753
	Double-ended cordset male, angled, RJ45, 180° male, straight, RJ45 shielded Cat5e Industrial	4 4	50V	1A		PUR	GN		IE-W6RJ45SS8.005-L-IE-RJ45SS8.005/S3400	8080807	8080995	8080754










\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m. Other cable- and wire lengths are available upon request.

◦ UL approved | • UL in preparation

		Body				Cable			L = cable length*			
		Pins	U[max]	I[max]	Δh[mm]	Material	Color	UL	Item description	2m / 1m	5m / 2m	10m / 5m
	Double-ended cordset male, angled, RJ45, 270° male, straight, RJ45 shielded Cat5e Industrial	4 4	50V	1A		PUR	GN		IE-W9RJ45SS8.005-L-IE-RJ45SS8.005/S3400	8080808	8080997	8080755
	Double-ended cordset male, straight, RJ45 light male, straight, RJ45 light shielded Cat5e Industrial	4 4	50V	1A		PUR	GN		IE-RJ45SLS8.005-L-IE-RJ45SLS8.005/S3400	8069789	8071964	8075806
	Double-ended cordset female, straight, M8 male, straight, M8 shielded Cat5e	4 4	60V	4A		PUR	GN	•	IE-SKPS4.027-L-IE-SSPS4.027/S3400	8055535	8055537	8055538
	Double-ended cordset male, straight, M8 male, straight, M8 shielded Cat5e	4 4	60V	4A		PUR	GN		IE-SSPS4.027-L-IE-SSPS4.027/S3400	8055532	8055533	8055534
	Double-ended cordset male, straight, M8 male, straight, RJ45 shielded Cat5e	4 4	50V	1A		PUR	GN		IE-SSPS4.027-L-IE-RJ45SS8.005/S3400	8055536	8055539	8055540
	Double-ended cordset male, angled, M8 male, straight, M8 shielded Cat5e	4 4	60V	4A		PUR	GN		IE-SWSPS4.027-L-IE-SSPS4.027/S3400	8055795	8055796	8055797
	Double-ended cordset male, angled, M8 male, angled, M8 shielded Cat5e	4 4	60V	4A		PUR	GN		IE-SWSPS4.027-L-IE-SWSPS4.027/S3400	8055801	8055802	8055804
	Single-ended cordset male, straight, M12 shielded Cat5e	4, D	250V	4A		PUR	RD	•	IE-WASSY4.029-L/S3800	8055493	8055494	8055495









\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m. Other cable- and wire lengths are available upon request.

• UL approved | ◦ UL in preparation

		Body				Cable			Item description	L = cable length*		
		Pins	U[max]	I[max]	Δh[mm]	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
	Single-ended cordset male, angled, M12 shielded Cat5e	4, D	250V	4A		PUR	RD	•	IE-WWASSY4.029-L/S3800	8055499	8055500	8055501
	Field-wireable connector male, straight, M12 shielded Cat5e Insulation displacement contact	4, D	250V	4A					IE-WASCSY4S	8065954		
	Single-ended cordset male, straight, RJ45 shielded Cat5e	4	50V	1A		PUR	RD	•	IE-RJ45SS4.003-L/S3800	8062332	8062333	8062334
	Field-wireable connector male, straight, RJ45 Cat6A Insulation displacement contact	8	50V	1A					IE-RJ45SCS8	8065955		
	Receptacle Single-ended cordset female, straight, M12 shielded Cat5e Cable Front wall-mounting	4, D	250V	4A		PUR	RD		IE-FKSY4.029-L/16/S3800/S3801	8063605	8063606	8063607
	Receptacle female, straight, M12 Cat5e Print contact Back wall-mounting	4, D	250V	4A				•	IE-FKFDY4-P/16/S38	8055849		
	Receptacle female, angled, M12 shielded Cat5e Print contact Back wall-mounting	4, D	250V	4A	1,0...2,5				IE-WFKFSY4-P/12/S3825	8055850		
				4A	2,5...4,0				IE-WFKFSY4-P/12/S3840	8055851		
				4A	4,0...5,0				IE-WFKFSY4-P/12/S3850	8055852		
	Receptacle Single-ended cordset female, straight, M12 shielded Cat5e Cable Back wall-mounting	4, D	250V	4A		PUR	RD		IE-FKFDY4.029-L/16/S3800/S38	8063599	8063600	8063601
	Receptacle Single-ended cordset female, angled, M12 shielded Cat5e Cable Back wall-mounting	4, D	250V	4A		PUR	RD		IE-WFKFDSY4.029-L/16/S3800/S38	8063602	8063603	8063604

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.












		Body				Cable				L = cable length*		
		Pins	U[max]	I[max]	Δh[mm]	Material	Color	UL	Item description	2m / 1m	5m / 2m	10m / 5m
	Double-ended cordset male, straight, M12 male, straight, M12 shielded Cat5e	4, D 4, D	60V	4A		PUR	RD	•	IE-WASSY4.029-L-IE-WASSY4.029/S3800	8055496	8055497	8055498
	Double-ended cordset male, straight, M12 male, straight, RJ45 shielded Cat5e	4, D 4	50V	1A		PUR	RD	•	IE-WASSY4.029-L-IE-RJ45SS4.003/S3800	8061084	8061085	8061086
	Receptacle Double-ended cordset female, straight, M12 male, straight, RJ45 shielded Cat5e	4, D	50V	1A		PUR	RD	•	IE-FKFDSY4.029-L-IE-RJ45SS4.003/S3800	8064026	8064027	8064028
	Double-ended cordset male, angled, M12 male, straight, M12 shielded Cat5e	4, D 4, D	60V	4A		PUR	RD	•	IE-WWASSY4.029-L-IE-WASSY4.029/S3800	8055502	8055503	8055504
	Double-ended cordset male, angled, M12 male, straight, RJ45 shielded Cat5e	4, D 4	50V	1A		PUR	RD	•	IE-WWASSY4.029-L-IE-RJ45SS4.003/S3800	8062320	8062321	8062322
	Double-ended cordset male, angled, M12 male, angled, M12 shielded Cat5e	4, D 4, D	60V	4A		PUR	RD	•	IE-WWASSY4.029-L-IE-WWASSY4.029/S3800	8055505	8055506	8055507
	Double-ended cordset male, straight, RJ45 male, straight, RJ45 shielded Cat5e Industrial	4 4	50V	1A		PUR	RD	•	IE-RJ45SS4.003-L-IE-RJ45SS4.003/S3800	8062326	8062327	8062328
	Adapter female, straight, M12 female, straight, M12 shielded Cat5e	4, D 4, D	250V	4A					IE-WAKSY4-IE-WAKSY4	8065952		

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Body				Cable				L = cable length*		
		Pins	U[max]	I[max]	Δh[mm]	Material	Color	UL	Item description	2m / 1m	5m / 2m	10m / 5m
	Adapter female, straight, M12 shielded Cat5e	8, X 4, D	50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A					IE-WAKSX8-IE-WAKSY4	8065950		
	Panel feed through female, straight, M12 shielded Cat5e	4, D 8	50V <sub>AC/DC</sub>	0.2A					IE-FKFDSY4-RJ45KS	8069793		
Back wall-mounting												
	Panel feed through female, angled, M12 shielded Cat5e	4, D 8	50V <sub>AC/DC</sub>	0.2A					IE-WKFDSY4-RJ45KS	8069794		
Back wall-mounting												
	Single-ended cordset male, straight, M12 shielded Cat6A	8, X	50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A		PUR	GN	•	IE-WASSX8.066-L/S3500	8049457	8049458	8049459
	Single-ended cordset male, straight, M12 shielded Cat6A	8, X	50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A		PUR	GN	•	IE-WASSX8.066-L/S4030	8063566	8063567	8063568
				0.5A		PUR	GN	•	IE-WASSX8.066-L/S4031	8063578	8063579	8063580
	Single-ended cordset male, angled, M12 shielded Cat6A	8, X	50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A		PUR	GN	•	IE-WWASSX8.066-L/S3500	8055441	8055442	8055443
	Single-ended cordset male, straight, RJ45 shielded Cat6A	8	50V	1A		PUR	GN	•	IE-RJ45SS8.002-L/S3500	8052214	8052215	8052216
	Field-wireable connector male, straight, RJ45 Cat6A Insulation displacement contact	8	50V	1A					IE-RJ45SCS8	8065955		
	Receptacle female, straight, M12 shielded Cat6A Print contact Front wall-mounting	8, X	50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A	0,9...2,5			•	IE-FKDSX8-P/12	8050232		












\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Body				Cable			L = cable length*		
		Pins	U[max]	I[max]	Δh[mm]	Material	Color	UL	Item description		
									2m / 1m	5m / 2m	10m / 5m
	Receptacle female, straight, M12 shielded Cat6A Print contact Back wall-mounting	8, X	50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A				•	IE-FHM12K5X8P/PG9 8079981		
	Receptacle female, angled, M12 shielded Cat6A Print contact Back wall-mounting	8, X	50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A	1,0...2,5			•	IE-WFKFSX8-P/12/S3525 8059345		
				0.5A	2,5...4,0			•	IE-WFKFSX8-P/12/S3540 8059346		
				0.5A	4,0...5,0			•	IE-WFKFSX8-P/12/S3550 8059347		
	Receptacle Single-ended cordset female, straight, M12 shielded Cat6A Cable Back wall-mounting	8, X	50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A		PUR	GN		IE-FKFDSX8.066-L/S3500 8061148 8061149 8061150		
	Receptacle Single-ended cordset female, straight, M12 shielded Cat6A Cable Back wall-mounting	8, X	50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A		PUR	GN		IE-FKFDSX8.066-L/S4030 8063572 8063573 8063574		
				0.5A		PUR	GN		IE-FKFDSX8.066-L/S4031 8063584 8063585 8063586		
	Double-ended cordset male, straight, M12 shielded Cat6A	8, X	50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A		PUR	GN	•	IE-WASSX8.066-L-IE-WASSX8.066/S3500 8048865 8049460 8049461		
		8, X							IE-WASSX8.066-L-IE-WASSX8.066/S4030 8063563 8063564 8063565		
	Double-ended cordset male, straight, M12 shielded Cat6A	8, X	50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A		PUR	GN	•	IE-WASSX8.066-L-IE-WASSX8.066/S4031 8063575 8063576 8063577		
		8, X							IE-WASSX8.066-L-IE-WASSX8.066/S4031 8063575 8063576 8063577		
	Double-ended cordset male, straight, M12 shielded Cat6A	8, X	50V	0.5A		PUR	GN	•	IE-WASSX8.066-L-IE-RJ45SS8.002/S3500 8053444 8053288 8053289		
	Receptacle Double-ended cordset female, straight, M12 male, straight, M12 Cat6A	8, X	50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A		PUR	GN	•	IE-FKFDSX8.066-L-IE-WASSX8.066/S3500 8061289 8061290 8061291		
		8, X							IE-FKFDSX8.066-L-IE-WASSX8.066/S4030 8063569 8063570 8063571		
	Receptacle Double-ended cordset female, straight, M12 male, straight, M12 Cat6A	8, X	50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A		PUR	GN	•	IE-FKFDSX8.066-L-IE-WASSX8.066/S4030 8063569 8063570 8063571		
		8, X							IE-FKFDSX8.066-L-IE-WASSX8.066/S4031 8063581 8063582 8063583		










\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Body				Cable				L = cable length*		
		Pins	U[max]	I[max]	Δh[mm]	Material	Color	UL	Item description	2m / 1m	5m / 2m	10m / 5m
	Receptacle Double-ended cordset female, straight, M12 male, straight, RJ45 shielded Cat6A	8, X 8	50V	0.5A		PUR	GN	•	IE-FKFDXSX8.066-L-IE-RJ45SS8.002/S3500	8061295	8061296	8061297
	Double-ended cordset male, angled, M12 male, straight, M12 shielded Cat6A	8, X 8, X	50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A		PUR	GN	•	IE-WWASSX8.066-L-IE-WASSX8.066/S3500	8055444	8055445	8055446
	Double-ended cordset male, angled, M12 male, straight, RJ45 shielded Cat6A	8, X 8	50V	0.5A		PUR	GN	•	IE-WWASSX8.066-L-IE-RJ45SS8.002/S3500	8055447	8055448	8055449
	Double-ended cordset male, straight, RJ45 male, straight, RJ45 shielded Cat6A T568B	8 8	50V	1A		PUR	GN	•	IE-RJ45SS8.002-L-IE-RJ45SS8.002/S3500	8052205	8048829	8048830
	Adapter female, straight, M12 female, straight, M12 shielded Cat6A	8, X 8, X	50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A					IE-WAKSX8-IE-WAKSX8	8065951		
	Panel feed through female, angled, M12 female, straight, RJ45 shielded Cat6A	8, X 8	50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A					IE-WFKFDSX8-RJ45KS	8055774		
	Back wall-mounting											
	Panel feed through female, straight, M12 female, straight, RJ45 shielded Cat6A	8, X 8	50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A					IE-FKFDXSX8-RJ45KS	8055773		
	Back wall-mounting											
	Wiring connector Cat7 Insulation displacement contact	8	60V <sub>DC</sub>	0.5A					IE-LVCS8	8055776		

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Body				Cable			Item description	L = cable length*		
		Pins	U[max]	I[max]	Δh[mm]	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
	Wall bracket for Industrial Ethernet adapter								Befestigungswinkel IE-Adapter	8065953		
	Adapter female, straight, RJ45	8	50V <sub>AC/DC</sub>	1A					IE-RJ45KS-RJ45KS	8076629		
	female, straight, RJ45 Cat6E	8										
	Field-wireable connector female, straight, M12 shielded	8, X	50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A					IE-WAKCSX8S	8086078		
	Cat6A Insulation displacement contact											
	Field-wireable connector male, straight, M12 shielded	8, X	50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A					IE-WASCSX8S	8050231		
	Cat6A Insulation displacement contact											
	Single-ended cordset female, straight, M8 shielded	4, D	50V <sub>AC</sub>   60V <sub>DC</sub>	4A		PUR	GN		IE-SKPSD4.071-L/S3400	8089116	8089132	8089136
	Cat5e			4A		PUR	GN		IE-SKPSD4.073-L/S2171	8089171	8089172	8089173
	Single-ended cordset female, angled, M8 shielded	4, D	50V <sub>AC</sub>   60V <sub>DC</sub>	4A		PUR	GN		IE-SWKPSD4.071-L/S3400	8089137	8089138	8089139
	Cat5e			4A		PUR	GN		IE-SWKPSD4.073-L/S2171	8089175	8089176	8089177
	Single-ended cordset male, straight, M8 shielded	4, D	50V <sub>AC</sub>   60V <sub>DC</sub>	4A		PUR	GN		IE-SSPSD4.071-L/S3400	8089140	8089141	8089142
	Cat5e			4A		PUR	GN		IE-SSPSD4.073-L/S2171	8089178	8089179	8089180
	Single-ended cordset male, angled, M8 shielded	4, D	50V <sub>AC</sub>   60V <sub>DC</sub>	4A		PUR	GN		IE-SWSPSD4.071-L/S3400	8089143	8089144	8089145
	Cat5e			4A		PUR	GN		IE-SWSPSD4.073-L/S2171	8089181	8089182	8089183
	Single-ended cordset female, straight, M8 shielded	4, P	50V <sub>AC</sub>   60V <sub>DC</sub>	4A		PUR	BK		IE-SKPSP4.054-L/S5058	8089159	8089160	8089161
	Cat5e			4A		PUR	BK		IE-SKPSP4.054-L/S5059	8089147	8089148	8089149
	Single-ended cordset female, angled, M8 shielded	4, P	50V <sub>AC</sub>   60V <sub>DC</sub>	4A		PUR	BK		IE-SWKPSP4.054-L/S5058	8089162	8089163	8089164
	Cat5e			4A		PUR	BK		IE-SWKPSP4.054-L/S5059	8089150	8089151	8089152

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.



		Body				Cable			L = cable length*		
		Pins	U[max]	I[max]	Δh[mm]	Material	Color	UL	Item description		
									2m / 1m	5m / 2m	10m / 5m
	Single-ended cordset male, straight, M8 shielded Cat5e	4, P	50V <sub>AC</sub>   60V <sub>DC</sub>	4A		PUR	BK		IE-SSPSP4.054-L/S5058		
				4A		PUR	BK		IE-SSPSP4.054-L/S5059		
	Single-ended cordset male, angled, M8 shielded Cat5e	4, P	50V <sub>AC</sub>   60V <sub>DC</sub>	4A		PUR	BK		IE-SWSPSP4.054-L/S5058		
				4A		PUR	BK		IE-SWSPSP4.054-L/S5059		
	Double-ended cordset female, straight, M8 shielded Cat5e	4, D	50V <sub>AC</sub>   60V <sub>DC</sub>	4A		PUR	GN		IE-SKPSD4.071-L-IE-SSPSD4.071/S3400		
				4A		PUR	GN		IE-SKPSD4.073-L-IE-SSPSD4.073/S2171		
	Double-ended cordset female, angled, M8 shielded Cat5e	4, D	50V <sub>AC</sub>   60V <sub>DC</sub>	4A		PUR	GN		IE-SWKPSD4.071-L-IE-SWSPSD4.071/S3400		
				4A		PUR	GN		IE-SWKPSD4.073-L-IE-SWSPSD4.073/S2171		
	Double-ended cordset male, straight, M8 shielded Cat5e	4, D	50V <sub>AC</sub>   60V <sub>DC</sub>	4A		PUR	GN		IE-SSPSD4.071-L-IE-SSPSD4.071/S3400		
				4A		PUR	GN		IE-SSPSD4.073-L-IE-SSPSD4.073/S2171		
	Double-ended cordset male, angled, M8 shielded Cat5e	4, D	50V <sub>AC</sub>   60V <sub>DC</sub>	4A		PUR	GN		IE-SWSPSD4.071-L-IE-SWSPSD4.071/S3400		
				4A		PUR	GN		IE-SWSPSD4.073-L-IE-SWSPSD4.073/S2171		
	Double-ended cordset female, straight, M8 shielded Cat5e	4, P	50V <sub>AC</sub>   60V <sub>DC</sub>	4A		PUR	BK		IE-SKPSD4.054-L-IE-SSPSP4.054/S5058		
				4A		PUR	BK		IE-SKPSD4.054-L-IE-SSPSP4.054/S5059		
	Double-ended cordset female, angled, M8 shielded Cat5e	4, P	50V <sub>AC</sub>   60V <sub>DC</sub>	4A		PUR	BK		IE-SWKPSD4.054-L-IE-SWSPSP4.054/S5058		
				4A		PUR	BK		IE-SWKPSD4.054-L-IE-SWSPSP4.054/S5059		
	Double-ended cordset male, straight, M8 shielded Cat5e	4, P	50V <sub>AC</sub>   60V <sub>DC</sub>	4A		PUR	BK		IE-SSPSP4.054-L-IE-SSPSP4.054/S5058		
				4A		PUR	BK		IE-SSPSP4.054-L-IE-SSPSP4.054/S5059		

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Body				Cable			L = cable length*			
		Pins	U[max]	I[max]	Δh[mm]	Material	Color	UL	Item description	2m / 1m	5m / 2m	10m / 5m
	Double-ended cordset male, angled, M8	4, P	50V <sub>AC</sub>   60V <sub>DC</sub>	4A		PUR	BK		IE-SWSPSP4.054-L-IE-SWSPSP4.054/S5058	8089196	8089197	8089198
	male, angled, M8 shielded Cat5e	4, P		4A		PUR	BK		IE-SWSPSP4.054-L-IE-SWSPSP4.054/S5059	8089209	8089210	8089211
	Receptacle female, straight, M8 shielded	4, D	50V <sub>AC</sub>   60V <sub>DC</sub>	4A					IE-FHM8KSD4-P/M10	8089337		
	Cat5e, print contact Back wall-mounting											
	Receptacle male, straight, M8 shielded	4, D	50V <sub>AC</sub>   60V <sub>DC</sub>	4A					IE-FHM8SSD4-P/M8	8089338		
	Cat5e, print contact Back wall-mounting											
	Receptacle female, angled, M8 shielded	4, D	50V <sub>AC</sub>   60V <sub>DC</sub>	4A					IE-WFHM8KSD4-P/M10	8089339		
	Cat5e, print contact Back wall-mounting											
	Receptacle male, angled, M8 shielded	4, D	50V <sub>AC</sub>   60V <sub>DC</sub>	4A					IE-WFHM8SSD4-P/M8	8089340		
	Cat5e, print contact Back wall-mounting											
	Receptacle female, straight, M8 shielded	4, P	50V <sub>AC</sub>   60V <sub>DC</sub>	4A					IE-FHM8KSP4-P/M10	8089341		
	Cat5e, print contact Back wall-mounting											
	Receptacle male, straight, M8 shielded	4, P	50V <sub>AC</sub>   60V <sub>DC</sub>	4A					IE-FHM8SSP4-P/M8	8089342		
	Cat5e, print contact Back wall-mounting											
	Receptacle female, angled, M8 shielded	4, P	50V <sub>AC</sub>   60V <sub>DC</sub>	4A					IE-WFHM8KSP4-P/M10	8089343		
	Cat5e, print contact Back wall-mounting											
	Receptacle male, angled, M8 shielded	4, P	50V <sub>AC</sub>   60V <sub>DC</sub>	4A					IE-WFHM8SSP4-P/M8	8089344		
	Cat5e, print contact Back wall-mounting											

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

Nomenclature

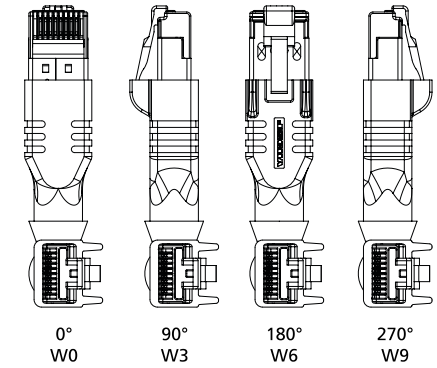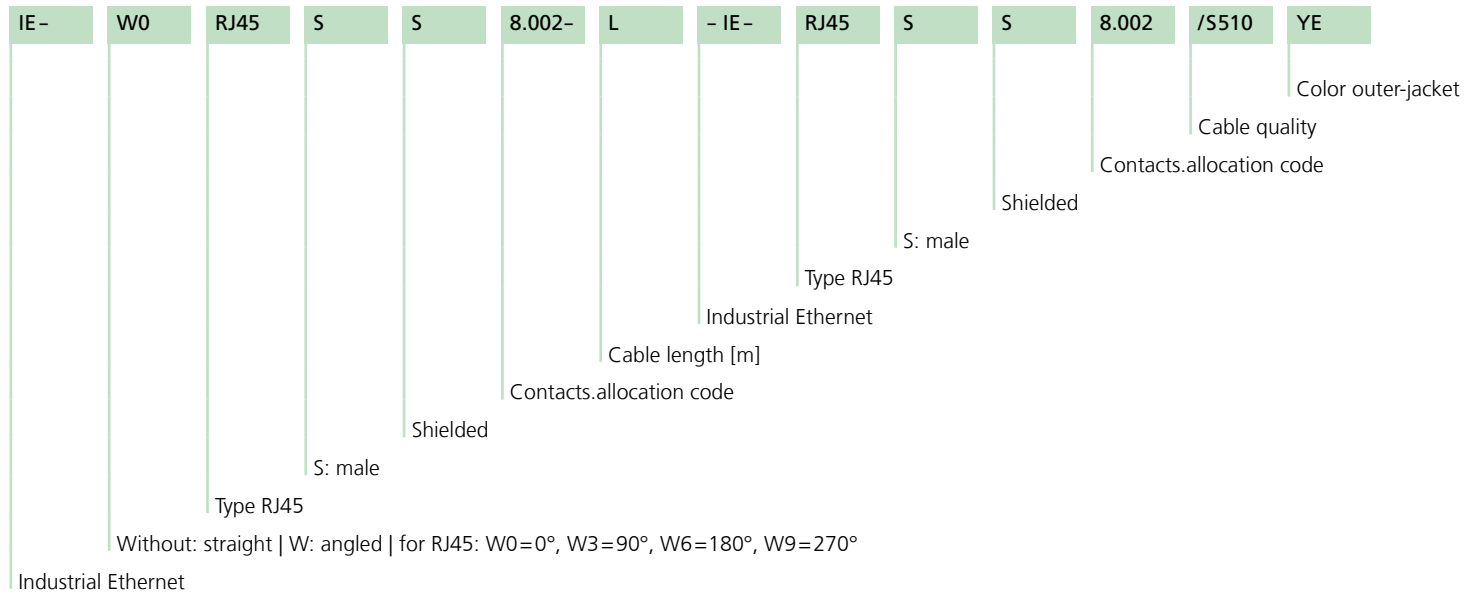


RJ45 patch cords



Cable	Material	UL	Color	Transmission features	Drag chain-adapted
S510	PVC/PE		GY, RD, YE, BU, GN	Cat5e	
S620	HFC/PE	✓	GY, RD, YE, BU, GN, BK	Cat7	
S3400	PUR/PP	✓	GN	Cat5e	✓

Industrial
























## RJ45 patch cords

Technical data	RJ45
Insulation resistance	$\geq 10^8 \Omega$
Resistance	$\leq 5 m\Omega$
Ambient temperature product	-40°C...+70°C
Contact material	Metal, CuZn, gold-plated
Contact-carrier material	Plastic
Grip body material	Plastic, TPE, BK
Standards	IEC 60603-7-5
Degree of protection (mounted)	IP20
Mechanical life-cycle	>750 mating cycles
Degree of pollution	1

Our RJ45 patch cords are adapted for industrial applications as well as a structured building wiring. We have launched two product lines: one with PVC-cable quality for Cat5e-applications and another with FRNC-cable quality for Cat6A-applications respectively including four-pair AWG26-cables. The RJ45 patch cords are IP20 tested.

				L = cable length								
	Color	UL	Item description	0,3m	0,5m	1m	2m	5m	7,5m	10m	12,5m	
	GY		Double-ended cordset male, straight, RJ45 Cat5e T568B IE-RJ45SS8.002-L-IE-RJ45SS8.002/S510GY	8068494	8068495	8068496	8068497	8068499	8068501	8068502	8068503	
	RD		Double-ended cordset male, straight, RJ45 Cat5e T568B IE-RJ45SS8.002-L-IE-RJ45SS8.002/S510RD	8068540	8068541	8068542	8068543	8068545	8068546	8068547	8068548	
	YE		Double-ended cordset male, straight, RJ45 Cat5e T568B IE-RJ45SS8.002-L-IE-RJ45SS8.002/S510YE	8068524	8068525	8068526	8068527	8068529	8068530	8068531	8068532	
	BU		Double-ended cordset male, straight, RJ45 Cat5e T568B IE-RJ45SS8.002-L-IE-RJ45SS8.002/S510BU	8068556	8068557	8068558	8068559	8068560	8068561	8068562	8068563	
	GN		Double-ended cordset male, straight, RJ45 Cat5e T568B IE-RJ45SS8.002-L-IE-RJ45SS8.002/S510GN	8068571	8068572	8068573	8068574	8068576	8068577	8068578	8068579	
	BK	•	Double-ended cordset male, straight, RJ45 Cat6A T568B IE-RJ45SS8.002-L-IE-RJ45SS8.002/S620BK	8076929	8077188	8077189	8077190	8077192	8077193	8077194	8077195	
	GY	•	Double-ended cordset male, straight, RJ45 Cat6A T568B IE-RJ45SS8.002-L-IE-RJ45SS8.002/S620GY	8077337	8077338	8077339	8077340	8077342	8077343	8077344	8077345	
	RD	•	Double-ended cordset male, straight, RJ45 Cat6A T568B IE-RJ45SS8.002-L-IE-RJ45SS8.002/S620RD	8077287	8077288	8077289	8077290	8077292	8077293	8077294	8077295	
	YE	•	Double-ended cordset male, straight, RJ45 Cat6A T568B IE-RJ45SS8.002-L-IE-RJ45SS8.002/S620YE	8077320	8077321	8077322	8077323	8077325	8077326	8077327	8077328	

					L = cable length							
		Color	UL	Item description	0,3m	0,5m	1m	2m	5m	7,5m	10m	12,5m
	Double-ended cordset male, straight, RJ45 Cat6A T568B	BU	•	IE-RJ45SS8.002-L-IE-RJ45SS8.002/S620BU	8077304	8077305	8077306	8077307	8077309	8077310	8077311	8077312
	Double-ended cordset male, straight, RJ45 Cat6A T568B	GN	•	IE-RJ45SS8.002-L-IE-RJ45SS8.002/S620GN	8077354	8077465	8077466	8077467	8077469	8077470	8077471	8077472
	Double-ended cordset male, straight, RJ45 Cat6A Crossover	BK	•	IE-RJ45SS8.002-L-IE-RJ45SS8.012/S620BK	8076930	8077149	8077479	8077480	8077482	8077483	8077484	8077485
	Double-ended cordset male, straight, RJ45 Cat6A Crossover	GY	•	IE-RJ45SS8.002-L-IE-RJ45SS8.012/S620GY	8077555	8077556	8077557	8077558	8077559	8077561	8077562	8077563
	Double-ended cordset male, straight, RJ45 Cat6A Crossover	RD	•	IE-RJ45SS8.002-L-IE-RJ45SS8.012/S620RD	8077492	8077493	8077494	8077495	8077497	8077498	8077499	8077500
	Double-ended cordset male, straight, RJ45 Cat6A Crossover	YE	•	IE-RJ45SS8.002-L-IE-RJ45SS8.012/S620YE	8077510	8077511	8077512	8077514	8077515	8077516	8077517	8077518
	Double-ended cordset male, straight, RJ45 Cat6A Crossover	BU	•	IE-RJ45SS8.002-L-IE-RJ45SS8.012/S620BU	8077540	8077541	8077542	8077543	8077545	8077546	8077547	8077548
	Double-ended cordset male, straight, RJ45 Cat6A Crossover	GN	•	IE-RJ45SS8.002-L-IE-RJ45SS8.012/S620GN	8077525	8077526	8077527	8077528	8077530	8077531	8077532	8077533
	Double-ended cordset male, straight, RJ45 light shielded Cat5e Industrial	GN		IE-RJ45SLS8.005-L-IE-RJ45SLS8.005/S3400	8070278	8070956	8069789	8071964	8075806	8075807	8075808	8075809

				L = cable length							
	Color	UL	Item description	0,3m	0,5m	1m	2m	5m	7,5m	10m	12,5m
	GN		Double-ended cordset male, angled, RJ45, 0° male, straight, RJ45 shielded Cat5e Industrial IE-W0RJ45SS8.005-L-IE-RJ45SS8.005/S3400			8080803	8080804	8080752			
	GN		Double-ended cordset male, angled, RJ45, 90° male, straight, RJ45 shielded Cat5e Industrial IE-W3RJ45SS8.005-L-IE-RJ45SS8.005/S3400			8080805	8080806	8080753			
	GN		Double-ended cordset male, angled, RJ45, 180° male, straight, RJ45 shielded Cat5e Industrial IE-W6RJ45SS8.005-L-IE-RJ45SS8.005/S3400			8080807	8080995	8080754			
	GN		Double-ended cordset male, angled, RJ45, 270° male, straight, RJ45 shielded Cat5e Industrial IE-W9RJ45SS8.005-L-IE-RJ45SS8.005/S3400			8080808	8080997	8080755			



Nomenclature

PB- W WAK S W 2.012- L - PB- W WAS S W 2.012 16 /S1800 /S3525


Double-ended cordset

Extra: e.g wall-thickness compensation or colored contact-carrier  
 Cable quality  
 Fastening thread with receptacles M16x1.5 or M12x1  
 Contacts.allocation code  
 B-coded  
 Shielded  
 WAS: M12 male  
 W: angled | without: straight  
 Profibus  
 L: Cable length, Wire-length [m] | P: Print contact with receptacles  
 Contacts.allocation code  
 B-coded  
 Shielded  
 WAK: M12 female | WAS: M12 male | FK: M12 female receptacle front-wall mounting | FK(F)(D): M12 female receptacle back-wall mounting (adjustable)  
 W: angled | without: straight

Profibus



Cable	Material	UL	Color	Feature	drag chain-adapted
S1800	PUR/PE	✓	VT	PROFIBUS	✓

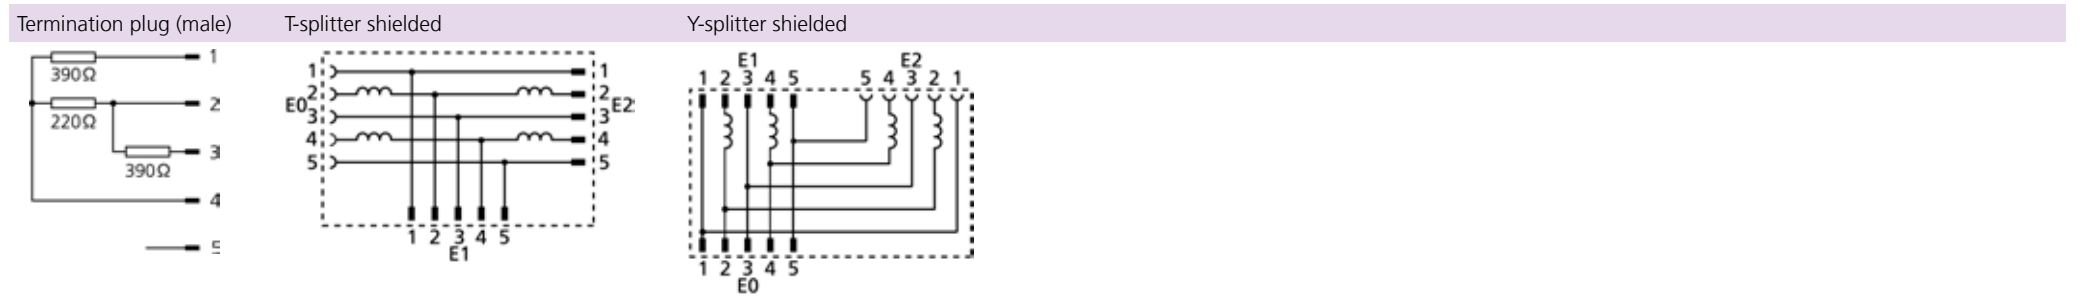














## Profibus













Technical data	Connector + Termination plug	Receptacles	T-, Y- splitter	Field-wireable
Insulation resistance	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$
Resistance	$\leq 5 m\Omega$	$\leq 5 m\Omega$	$\leq 5 m\Omega$	$\leq 5 m\Omega$
Ambient temperature product	-30°C...+90°C	-30°C...+90°C (* +70°C )	-30°C...+90°C	-40°C...+85°C
Contact material	Metal, CuZn, gold-plated	Metal, gold-plated	Metal, gold-plated	Metal, gold-plated
Contact-carrier material	Plastic, TPU, BK	Plastic, TPU, VT	Plastic, TPU	Plastic, PA
Grip body material	Plastic, TPU, BK	Plastic, TPU	Plastic, TPU	Zinc die-cast, nickel-plated
Coupling nut material	Metal, CuZn, nickel-plated			Metal, nickel-plated
Sealing (female) material	FPM/FKM	FPM/FKM	FPM/FKM	FPM/FKM
Material of external sealing		NBR		
Receptacle housing material		Metal, CuZn, nickel-plated		
Standards	IEC 61076-2-101	IEC 61076-2-101	IEC 61076-2-101	IEC 61076-2-101
Degree of protection (mounted)	IP65, IP67, IP68	IP65, IP67, IP68	IP65, IP67, IP68	IP67
Mechanical life-cycle	>100 mating cycles	>100 mating cycles	>100 mating cycles	>100 mating cycles
Degree of pollution	3	3	3	3
Connecting cross-section				max. 0,75mm <sup>2</sup>
Connecting type				Screw-/clamp contact

The connectors used in fieldbus technology have to meet bus-specific requirements. We have developed a product line which meets the requirements of the PROFIBUS/PROFINET user organization (PNO): 5-pins/B-coded connectors, receptacles, T-splitter and Y-splitter with 360°-shielding.









		Body				Cable			Item description	L = cable length*		
		Pins	U[max]	I[max]	$\Delta h$ [mm]	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
	Single-ended cordset female, straight, M12 shielded	4, B	60V	4A		PUR	VT	•	PB-WAKSW2.012-L/S1800	8043866	8043868	8043869
	Single-ended cordset female, angled, M12 shielded	4, B	60V	4A		PUR	VT	•	PB-WWAKSW2.012-L/S1800	8043870	8043871	8043872
	Single-ended cordset male, straight, M12 shielded	4, B	60V	4A		PUR	VT	•	PB-WASSW2.012-L/S1800	8043873	8043874	8043875
	Single-ended cordset male, angled, M12 shielded	4, B	60V	4A		PUR	VT	•	PB-WWASSW2.012-L/S1800	8043876	8043877	8043878
	Receptacle Single-ended cordset female, straight, M12 shielded Cable Front wall-mounting	5, B	60V	4A		PUR	VT	•	PB-FKSW2.012-L/16/S1800/S3941	8063621	8063622	8063623
	Receptacle Single-ended cordset female, straight, M12 shielded Cable Back wall-mounting	5, B	60V	4A		PUR	VT	•	PB-FKFDSW2.012-L/16/S1800	8061882	8063617	8063618
	Receptacle Single-ended cordset female, angled, M12 shielded Cable Back wall-mounting	5, B	60V	4A		PUR	VT	•	PB-WFKFDSW2.012-L/16/S1800	8061881	8063619	8063620
	Receptacle female, angled, M12 shielded Print contact Back wall-mounting	5, B	60V	4A	1,0...2,5				PB-WFKFSW5-P/12/S3525	8050279		
				4A	2,5...4,0				PB-WFKFSW5-P/12/S3540	8050280		
				4A	4,0...5,0				PB-WFKFSW5-P/12/S3550	8050281		
	Receptacle female, straight, M12 Wire contact Back wall-mounting	5, B	60V	4A					PB-FHM12KUB2.012-0,5/M16	8072599		
	Receptacle female, straight, M12 Print contact Back wall-mounting	5, B	60V	4A				•	PB-FHM12KUB5-P/M16	8072611		
	Receptacle male, straight, M12 Wire contact Back wall-mounting	5, B	60V	4A					PB-FHM12SUB2.012-0,5/M16	8072633		

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.



		Body				Cable			UL	Item description	L = cable length*		
		Pins	U[max]	I[max]	Δh[mm]	Material	Color	2m / 1m			5m / 2m	10m / 5m	
	Receptacle male, straight, M12 Print contact Back wall-mounting	5, B	60V	4A				•	PB-FHM12SUB5-P/M16	8072640			
	Receptacle female, straight, M12 Wire contact Front wall-mounting	5, B	60V	4A					PB-FVM12KUB2.012-0,5/M16	8072602			
	Receptacle male, straight, M12 Wire contact Front wall-mounting	5, B	60V	4A					PB-FVM12SUB2.012-0,5/M16	8072634			
	Receptacle male, angled, M12 shielded Print contact Back wall-mounting	5, B	60V	4A					PB-WFSFSW5-P/12	8045658			
	Receptacle female, straight, M12 Wire contact Front wall-mounting, positionable	5, B	60V	4A					PB-FVM12KUB2.012-0,5/M16/S520	8077910			
	Receptacle male, straight, M12 Wire contact Front wall-mounting, positionable	5, B	60V	4A					PB-FVM12SUB2.012-0,5/M16/S520	8077971			
	Double-ended cordset female, straight, M12 male, straight, M12 shielded	4, B	60V	4A		PUR	VT	•	PB-WAKSW2.012-L-PB-WASSW2.012/S1800	8045613	8043867	8043879	
		4, B											
	Double-ended cordset female, straight, M12 male, angled, M12 shielded	4, B	60V	4A		PUR	VT	•	PB-WAKSW2.012-L-PB-WWASSW2.012/S1800	8051935	8043884	8043885	
		4, B											
	Double-ended cordset female, angled, M12 male, straight, M12 shielded	4, B	60V	4A		PUR	VT	•	PB-WWAKSW2.012-L-PB-WASSW2.012/S1800	8046479	8043881	8043882	
		4, B											

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Body				Cable			Item description	L = cable length*		
		Pins	U[max]	I[max]	Δh[mm]	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
	Double-ended cordset female, angled, M12 shielded	4, B 4, B	60V	4A		PUR	VT	•	PB-WWAKSW2.012-L-PB-WWASSW2.012/S1800	8051936	8043887	8043888
	Field-wireable connector female, straight, M12 shielded Screw-/clamp contact	5, B	125V	4A					PB-WAKCSW4.5K	8031376		
	Field-wireable connector female, angled, M12 shielded Screw-/clamp contact	5, B	125V	4A					PB-WWAKCSW4.5K	8040235		
	Field-wireable connector male, straight, M12 shielded Screw-/clamp contact	5, B	125V	4A					PB-WASCSW4.5K	8031375		
	Field-wireable connector male, angled, M12 shielded Screw-/clamp contact	5, B	125V	4A					PB-WWASCSW4.5K	8040236		
	Termination plugs male, straight, M12	5, B	60V	4A				•	PB-WASSW4.5-AS	8043520		
	T-splitter shielded	5 5	60V	0.4A					PB-T-WAKSW5-WASSW5-WASSW5	8057719		
	Y-splitter shielded	5 5	60V	0.4A					PB-Y-WASSW5-WASSW5-WAKSW5	8057724		

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.



Nomenclature

Double-ended cordset

CD-	W	WAK	C	5.022-	L	- CD-	W	WAS	5.022	16	/S2800

Cable quality  
 Fastening thread with receptacles M16x1.5  
 Contacts.allocation code  
 WAS: M12 male  
 W: angled | without: straight  
 CANopen/DeviceNet  
 L: Cable length [m] | K: Screw-/clamp contact with field-wireable connectors  
 Contacts.allocation code  
 Field-wireable  
 WAK: M12 female | WAS: M12 male | FK: M12 female receptacle front-wall mounting | FKF(D): M12 female receptacle back-wall mounting (adjustable)  
 W: angled | without: straight  
 CANopen/DeviceNet



Cable	Material	UL	Color	Feature
S2800	PE/PP/PUR	✓	BK	CANopen/DeviceNet
























## CANopen/DeviceNet

Technical data	Connector + Termination plug	Receptacles	T-splitters	Field-wireable
Insulation resistance	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$	$\geq 108 \Omega$	$\geq 10^8 \Omega$
Ambient temperature product	-30°C...+90°C	-30°C...+90°C	-30°C...+90°C	-40°C...+85°C
Contact material	Metal, CuZn, gold-plated	Metal, gold-plated	Metal, gold-plated	Metal, CuZn, CuSnZn
Contact-carrier material	Plastic, TPU, BK	Plastic, TPU, BK	Plastic, TPU	Plastic, PA, BK
Grip body material	Plastic, TPU, BK		Plastic, TPU	Plastic, PA, BK
Coupling nut material	Metal, CuZn, nickel-plated		Metal, CuZn, nickel-plated	Metal, nickel-plated
Sealing (female) material	FPM/FKM	FPM/FKM	FPM/FKM	
Material of external sealing		NBR		
Receptacle housing material		Metal, CuZn, nickel-plated		
Standards	IEC 61076-2-101	IEC 61076-2-101	IEC 61076-2-101	IEC 61076-2-101
Degree of protection (mounted)	IP65, IP67, IP68	IP65, IP67, IP68	IP65, IP67, IP68	IP67
Mechanical life-cycle	>100 mating cycles	>100 mating cycles	>100 mating cycles	>100 mating cycles
Degree of pollution	3	3	3	3
Cable outlet				4...6mm
Connecting cross-section				max. 0,75 mm <sup>2</sup>

The ODVA user organization asks for 5-pins M12 connectors and receptacles with shielded cables in PUR halogen-free, twisted-pair for signals and supply voltage with stranded drain wire. Of course, our UL-admitted 'thin-cable' components meet these requirements. Furthermore, we offer M12 terminating resistors (male and female) with 120Ω.

		Body				Cable			Item description	L = cable length*		
		Pins	U[max]	I[max]	Special	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
	Single-ended cordset female, straight, M12	5, A	60V	4A		PUR	BK	•	CD-WAK5.022-L/S2800	8047517	8047518	8047519
	Single-ended cordset female, angled, M12	5, A	60V	4A		PUR	BK	•	CD-WWAK5.022-L/S2800	8047520	8047521	8047522
	Field-wireable connector female, straight, M12 Screw-/clamp contact	5, A	125V	4A					WAKC5K	8004815		
	Field-wireable connector female, angled, M12 Screw-/clamp contact	5, A	125V	4A					WWAKC5K	8004809		
	Receptacle female, straight, M12 Wire contact Front wall-mounting	5, A	60V	4A				•	CD-FVM12KUA5.022-0,5/M16	8085770		
	Receptacle female, straight, M12 Wire contact Back wall-mounting	5, A	60V	4A				•	CD-FHM12KUA5.022-0,5/M16	8085771		
	Single-ended cordset male, straight, M12	5, A	60V	4A		PUR	BK	•	CD-WAS5.022-L/S2800	8047523	8047524	8047525
	Single-ended cordset male, angled, M12	5, A	60V	4A		PUR	BK	•	CD-WWAS5.022-L/S2800	8047526	8047527	8047528
	Field-wireable connector male, straight, M12 Screw-/clamp contact	5, A	125V	4A					WASC5K	8004805		
	Field-wireable connector male, angled, M12 Screw-/clamp contact	5, A	125V	4A					WWASC5K	8004807		
	Receptacle male, straight, M12 Wire contact Front wall-mounting	5, A	60V	4A				•	CD-FVM12SUA5.022-0,5/M16	8085772		
	Receptacle male, straight, M12 Wire contact Back wall-mounting	5, A	60V	4A				•	CD-FHM12SUA5.022-0,5/M16	8085773		


\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Body				Cable			UL	Item description	L = cable length*		
		Pins	U[max]	I[max]	Special	Material	Color	2m / 1m			5m / 2m	10m / 5m	
	Double-ended cordset female, straight, M12	5, AA	60V	4A		PUR	BK	•	CD-WAK5.022-L-CD-WAS5.022/S2800	8047491	8047492	8047494	
	Double-ended cordset female, straight, M12	5, A	60V	4A		PUR	BK	•	CD-WAK5.022-L-CD-WWA55.022/S2800	8051938	8047532	8047533	
	Double-ended cordset female, angled, M12	5, A	60V	4A		PUR	BK	•	CD-WWAK5.022-L-CD-WAS5.022/S2800	8051937	8047529	8047530	
	Double-ended cordset female, angled, M12	5, A	60V	4A		PUR	BK	•	CD-WWAK5.022-L-CD-WWA55.022/S2800	8051939	8047535	8047536	
	Termination plugs female, straight, M12	5, A	60V	4A				•	CD-WAK2.010-AK/S3234	8047942			
	Termination plugs male, straight, M12	5, A	60V	4A				•	CD-WAS2.010-AS/S3234	8047943			
	T-splitter	5	60V	4A					FKM5-FKM5-FSM5/S222	8035172			


\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

Nomenclature of patched connectors, receptacles

Double-ended cordset

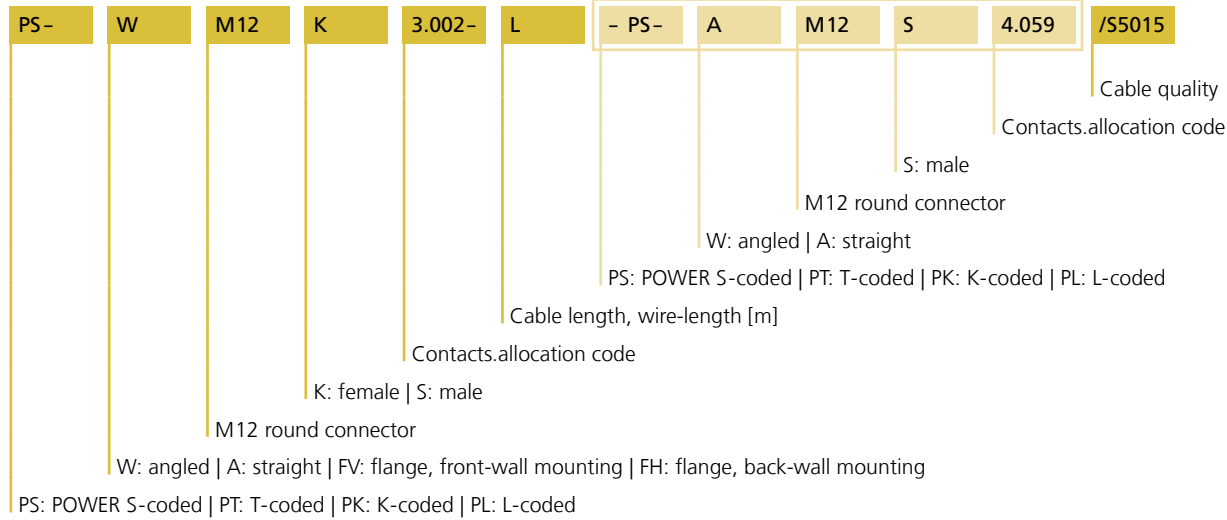


Nomenclature of POWER splitters

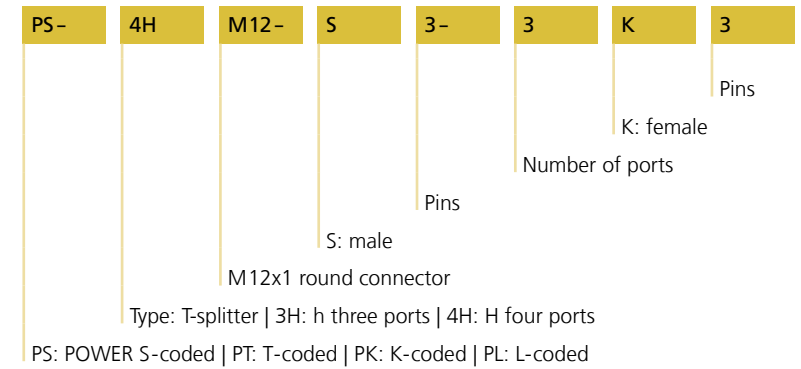

M12x1 POWER



Cable	Material	UL	Colour	Wire cross-section	Drag chain-adapted	PNO-compliant
S5015	PUR/PP	✓	BK	1.5mm <sup>2</sup>	✓	
S5015GY	PUR/PP	✓	GY	1.5mm <sup>2</sup>	✓	✓
S5025	PUR/PP	✓	BK	2.5mm <sup>2</sup>	✓	
S5025GY	PUR/PP	✓	GY	2.5mm <sup>2</sup>	✓	✓

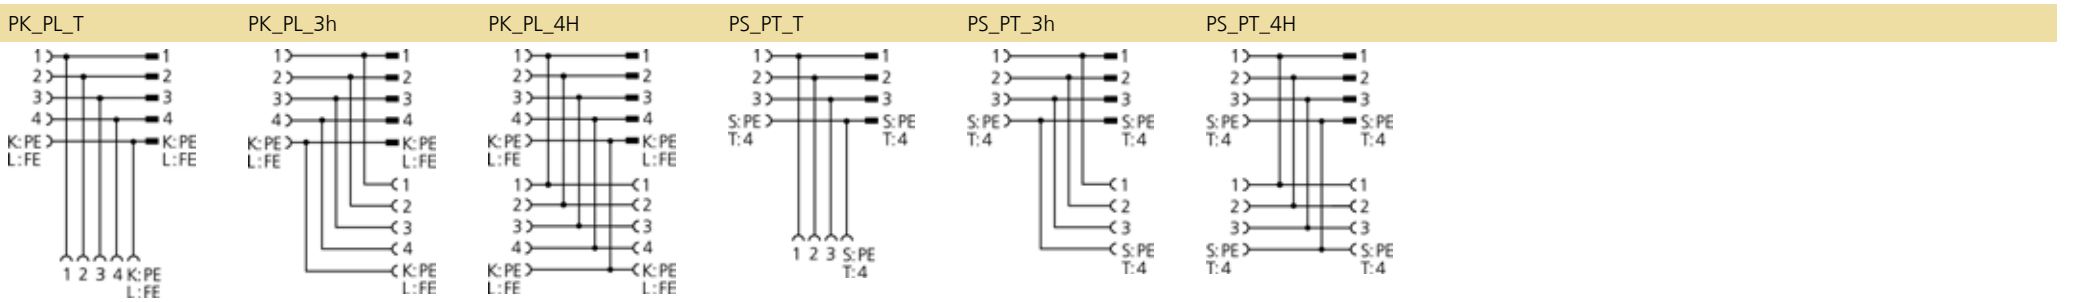


























## M12x1 POWER

Technical data	Connectors	Receptacles	Field-wireable	T-, h-, H-splitters
Insulation resistance	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$
Resistance	$\leq 5 \text{ m}\Omega$	$\leq 5 \text{ m}\Omega$	$\leq 3 \text{ m}\Omega$	$\leq 5 \text{ m}\Omega$
Ambient temperature product	-30°C...+90°C	-40°C...+85°C	-40°C...+85°C	-30°C...+90°C
Contact material	Metal, CuZn, gold-plated	Metal, gold-plated	Metal, gold-plated	Metal, gold-plated
Contact-carrier material	Plastic, PA, BK	Plastic, PA	Plastic, PA	Plastic, PA, BK
Grip body material	Plastic, TPU, BK	Plastic, TPU	Plastic, PA	Plastic, TPU
Coupling nut material	Metal, CuZn, nickel-plated	Metal, nickel-plated		Metal, nickel-plated
Sealing (female) material	FPM/FKM			
Receptacle housing material		Zinc die-cast, nickel-plated		
Standards	IEC 61076-2-111	IEC 61076-2-111	IEC 61076-2-111	IEC 61076-2-111
Degree of protection (mounted)	IP65, IP67, IP68	IP65, IP67, IP68	IP67	IP65, IP67, IP68
Mechanical life-cycle	>100 mating cycles	>100 mating cycles	>100 mating cycles	>100 mating cycles
Degree of pollution	2	3	3	2
Cable outlet			8...10mm	
Connecting cross-section			1,50mm <sup>2</sup>	

M12x1 POWER from ESCHA stands for a reliable power transmission via the standardized M12-interface. Due to their compact housing design, devices with S-coding (630V, 12A), T-coding (63V, 12A), L-coding (63V, 16A, 4-FE, PNO-compliant), and K-coding (630V, 12A, 4+PE) are especially adapted for the power supply in the automation field. A broad product range with single-ended and double-ended cordsets as well as H-, h-, and T-splitters facilitates a serial wiring structure at field level. The connection cross-section up to 2.5 mm<sup>2</sup> of all M12x1 POWER products is a unique feature. In contrast to small cross-sections, this feature enables a large extension of power distribution and – especially in case of DC-distribution – a slight voltage drop.

		Body				Cable			L = cable length*		
		Pins	U[max]	I[max]	Cod.	Material	Ø[mm²]	Item description	2m / 1m	5m / 2m	10m / 5m
	Single-ended cordset female, straight, M12	2+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S	PUR   BK	3 x 1.5	PS-AM12K3.002-L/S5015	8064011	8064012	8064013
		3+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S	PUR   BK	4 x 1.5	PS-AM12K4.155-L/S5015	8068091	8068092	8068093
	Single-ended cordset female, angled, M12	2+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S	PUR   BK	3 x 1.5	PS-WM12K3.002-L/S5015	8064014	8064015	8064016
		3+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S	PUR   BK	4 x 1.5	PS-WM12K4.155-L/S5015	8068095	8068096	8068097
	Single-ended cordset male, straight, M12	2+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S	PUR   BK	3 x 1.5	PS-AM12S3.002-L/S5015	8064017	8064018	8064019
		3+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S	PUR   BK	4 x 1.5	PS-AM12S4.155-L/S5015	8068098	8068106	8068107
	Single-ended cordset male, angled, M12	2+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S	PUR   BK	3 x 1.5	PS-WM12S3.002-L/S5015	8064020	8064021	8064022
		3+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S	PUR   BK	4 x 1.5	PS-WM12S4.155-L/S5015	8068108	8068109	8068110
	Double-ended cordset female, straight, M12	2+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S	PUR   BK	3 x 1.5	PS-AM12K3.002-L-PS-AM12S3.002/S5015	8063999	8064000	8064001
		3+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S	PUR   BK	4 x 1.5	PS-AM12K4.155-L-PS-AM12S4.155/S5015	8068297	8068131	8068132
	Double-ended cordset female, straight, M12	2+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S	PUR   BK	3 x 1.5	PS-AM12K3.002-L-PS-WM12S3.002/S5015	8064002	8064003	8064004
		3+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S	PUR   BK	4 x 1.5	PS-AM12K4.155-L-PS-WM12S4.155/S5015	8068298	8068134	8068135
	Double-ended cordset female, angled, M12	2+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S	PUR   BK	3 x 1.5	PS-WM12K3.002-L-PS-AM12S3.002/S5015	8064008	8064009	8064010
		3+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S	PUR   BK	4 x 1.5	PS-WM12K4.155-L-PS-AM12S4.155/S5015	8068301	8068140	8068141
	Double-ended cordset male, straight, M12	2+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S	PUR   BK	3 x 1.5	PS-AM12K3.002-L-PS-WM12S3.002/S5015	8064005	8064006	8064007
		3+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S	PUR   BK	4 x 1.5	PS-AM12K4.155-L-PS-WM12S4.155/S5015	8068299	8068137	8068138
	Double-ended cordset female, angled, M12	2+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S	PUR   BK	3 x 1.5	PS-WM12K3.002-L-PS-WM12S3.002/S5015	8064005	8064006	8064007
		3+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S	PUR   BK	4 x 1.5	PS-WM12K4.155-L-PS-WM12S4.155/S5015	8068299	8068137	8068138
	Receptacle female, straight, M12	2+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S		3 x 1.5	PS-FVM12KU3.002-0,2/M16/S5015	8087076		
				12A	S		3 x 2.5	PS-FVM12KU3.002-0,2/M16/S5025	8086643		
		3+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S		4 x 1.5	PS-FVM12KU4.155-0,2/M16/S5015	8087080		
				12A	S		4 x 2.5	PS-FVM12KU4.155-0,2/M16/S5025	8086188		
	Wire contact front wall-mounting	2+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S		3 x 1.5	PS-FVM12KU3.002-0,2/M16/S5015	8087076		
				12A	S		3 x 2.5	PS-FVM12KU3.002-0,2/M16/S5025	8086643		
		3+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S		4 x 1.5	PS-FVM12KU4.155-0,2/M16/S5015	8087080		
				12A	S		4 x 2.5	PS-FVM12KU4.155-0,2/M16/S5025	8086188		


\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Body				Cable			L = cable length*		
		Pins	U[max]	I[max]	Cod.	Material	Ø[mm²]	Item description	2m / 1m	5m / 2m	10m / 5m
	Receptacle female, straight, M12 Wire contact Back wall-mounting	2+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S	3 x 1.5	PS-FHM12KU3.002-0,2/M16/S5015	8087074			
				12A	S	3 x 2.5	PS-FHM12KU3.002-0,2/M16/S5025	8086182			
		3+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S	4 x 1.5	PS-FHM12KU4.155-0,2/M16/S5015	8087078			
				12A	S	4 x 2.5	PS-FHM12KU4.155-0,2/M16/S5025	8086184			
	Receptacle male, straight, M12 Wire contact Front wall-mounting	2+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S	3 x 1.5	PS-FVM12SU3.002-0,2/M16/S5015	8087077			
				12A	S	3 x 2.5	PS-FVM12SU3.002-0,2/M16/S5025	8086644			
		3+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S	4 x 1.5	PS-FVM12SU4.155-0,2/M16/S5015	8087081			
				12A	S	4 x 2.5	PS-FVM12SU4.155-0,2/M16/S5025	8086189			
	Receptacle male, straight, M12 Wire contact Back wall-mounting	2+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S	3 x 1.5	PS-FHM12SU3.002-0,2/M16/S5015	8087075			
				12A	S	3 x 2.5	PS-FHM12SU3.002-0,2/M16/S5025	8086183			
		3+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S	4 x 1.5	PS-FHM12SU4.155-0,2/M16/S5015	8087079			
				12A	S	4 x 2.5	PS-FHM12SU4.155-0,2/M16/S5025	8086185			
	Receptacle female, straight, M12 Print contact Back wall-mounting	2+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S		PS-FHM12KU3-P/M16	8086641			
		3+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S		PS-FHM12KU4-P/M16	8086186			
	Receptacle male, straight, M12 Print contact Back wall-mounting	2+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S		PS-FHM12SU3-P/M16	8086642			
		3+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S		PS-FHM12SU4-P/M16	8086187			
	Field-wireable connector female, straight, M12 Screw-/clamp contact	3+PE	630V <sub>DC</sub>	12A	S		PS-WAKC4K	8063400			
	Field-wireable connector male, straight, M12 Screw-/clamp contact	3+PE	630V <sub>DC</sub>	12A	S		PS-WASC4K	8063399			
	T-splitter	3+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S		PS-TM12-S4-2K4	8062858			
	h-splitter	3+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S		PS-3HM12-S4-2K4	8062859			
	H-splitter	3+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	S		PS-4HM12-S4-3K4	8062860			
















\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Body				Cable			L = cable length*		
		Pins	U[ <sub>max</sub> ]	I[ <sub>max</sub> ]	Cod.	Material	Ø[mm <sup>2</sup> ]	Item description	2m / 1m	5m / 2m	10m / 5m
	Single-ended cordset female, straight, M12	4	63V <sub>DC</sub>	12A	T	PUR   BK	4 x 1.5	PT-AM12K4-L/S5015	8063986	8063987	8063988
				12A	T	PUR   BK	4 x 2.5	PT-AM12K4-L/S5025	8063962	8063963	8063964
	Single-ended cordset female, angled, M12	4	63V <sub>DC</sub>	12A	T	PUR   BK	4 x 1.5	PT-WM12K4-L/S5015	8063989	8063990	8063991
				12A	T	PUR   BK	4 x 2.5	PT-WM12K4-L/S5025	8063965	8063966	8063967
	Single-ended cordset male, straight, M12	4	63V <sub>DC</sub>	12A	T	PUR   BK	4 x 1.5	PT-AM12S4-L/S5015	8063992	8063993	8063994
				12A	T	PUR   BK	4 x 2.5	PT-AM12S4-L/S5025	8063968	8063969	8063970
	Single-ended cordset male, angled, M12	4	63V <sub>DC</sub>	12A	T	PUR   BK	4 x 1.5	PT-WM12S4-L/S5015	8063998	8063997	8063995
				12A	T	PUR   BK	4 x 2.5	PT-WM12S4-L/S5025	8063971	8063972	8063973
	Double-ended cordset female, straight, M12	4	63V <sub>DC</sub>	12A	T	PUR   BK	4 x 1.5	PT-AM12K4-L-PT-AM12S4/S5015	8063974	8063975	8063976
				12A	T	PUR   BK	4 x 2.5	PT-AM12K4-L-PT-AM12S4/S5025	8063950	8063951	8063952
	Double-ended cordset female, straight, M12	4	63V <sub>DC</sub>	12A	T	PUR   BK	4 x 1.5	PT-AM12K4-L-PT-WM12S4/S5015	8063977	8063978	8063979
				12A	T	PUR   BK	4 x 2.5	PT-AM12K4-L-PT-WM12S4/S5025	8063953	8063954	8063955
	Double-ended cordset female, angled, M12	4	63V <sub>DC</sub>	12A	T	PUR   BK	4 x 1.5	PT-WM12K4-L-PT-AM12S4/S5015	8063983	8063984	8063985
				12A	T	PUR   BK	4 x 2.5	PT-WM12K4-L-PT-AM12S4/S5025	8063959	8063960	8063961
	Double-ended cordset male, straight, M12	4	63V <sub>DC</sub>	12A	T	PUR   BK	4 x 1.5	PT-AM12S4-L-PT-WM12K4/S5015	8063980	8063981	8063982
				12A	T	PUR   BK	4 x 2.5	PT-AM12S4-L-PT-WM12K4/S5025	8063956	8063957	8063958
	Double-ended cordset female, angled, M12	4	63V <sub>DC</sub>	12A	T	PUR   BK	4 x 1.5	PT-WM12K4-L-PT-WM12S4/S5015	8063980	8063981	8063982
				12A	T	PUR   BK	4 x 2.5	PT-WM12K4-L-PT-WM12S4/S5025	8063956	8063957	8063958
	Receptacle female, straight, M12	4	63V <sub>DC</sub>	12A	T		4 x 1.5	PT-FVM12KU4-0,2/M16/S5015	8087084		
				12A	T		4 x 2.5	PT-FVM12KU4-0,2/M16/S5025	8086194		
	Wire contact Front wall-mounting										


\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Body				Cable			L = cable length*		
		Pins	U[ <sub>max</sub> ]	I[ <sub>max</sub> ]	Cod.	Material	Ø[mm <sup>2</sup> ]	Item description	2m / 1m	5m / 2m	10m / 5m
	Receptacle female, straight, M12 Wire contact Back wall-mounting	4	63V <sub>DC</sub>	12A	T	4 x 1.5	PT-FHM12KU4-0,2/M16/S5015	8087082			
				12A	T	4 x 2.5	PT-FHM12KU4-0,2/M16/S5025	8086190			
	Receptacle male, straight, M12 Wire contact Front wall-mounting	4	63V <sub>DC</sub>	12A	T	4 x 1.5	PT-FVM12SU4-0,2/M16/S5015	8087085			
				12A	T	4 x 2.5	PT-FVM12SU4-0,2/M16/S5025	8086195			
	Receptacle male, straight, M12 Wire contact Back wall-mounting	4	63V <sub>DC</sub>	12A	T	4 x 1.5	PT-FHM12SU4-0,2/M16/S5015	8087083			
				12A	T	4 x 2.5	PT-FHM12SU4-0,2/M16/S5025	8086191			
	Receptacle female, straight, M12 Print contact Back wall-mounting	4	63V <sub>DC</sub>	12A	T		PT-FHM12KU4-P/M16	8086192			
	Receptacle male, straight, M12 Print contact Back wall-mounting	4	63V <sub>DC</sub>	12A	T		PT-FHM12SU4-P/M16	8086193			
	Field-wireable connector female, straight, M12 Screw-/clamp contact	4	63V <sub>DC</sub>	12A	T		PT-WAKC4K	8063398			
	Field-wireable connector male, straight, M12 Screw-/clamp contact	4	63V <sub>DC</sub>	12A	T		PT-WASC4K	8063397			
	T-splitter	4	63V <sub>DC</sub>	12A	T		PT-TM12-S4-2K4	8067897			
	h-splitter	4	63V <sub>DC</sub>	12A	T		PT-3HM12-S4-2K4	8067900			
	H-splitter	4	63V <sub>DC</sub>	12A	T		PT-4HM12-S4-3K4	8067903			
	Single-ended cordset female, straight, M12	4+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	K	PUR   BK 5 x 1.5	PK-AM12K5.244-L/S5015	8075272	8075273	8075274	

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Body				Cable		L = cable length*			
		Pins	U[max]	I[max]	Cod.	Material	Ø[mm²]	Item description	2m / 1m	5m / 2m	10m / 5m
	Single-ended cordset female, angled, M12	4+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	K	PUR   BK	5 x 1.5	PK-WM12K5.244-L/S5015	8075298	8075299	8075300
	Single-ended cordset male, straight, M12	4+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	K	PUR   BK	5 x 1.5	PK-AM12S5.244-L/S5015	8075301	8075302	8075303
	Single-ended cordset male, angled, M12	4+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	K	PUR   BK	5 x 1.5	PK-WM12S5.244-L/S5015	8075315	8075319	8075322
	Double-ended cordset female, straight, M12 male, straight, M12	4+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	K	PUR   BK	5 x 1.5	PK-AM12K5.244-L-PK-AM12S5.244/S5015	8075847	8075848	8075849
											
	Double-ended cordset female, straight, M12 male, angled, M12	4+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	K	PUR   BK	5 x 1.5	PK-AM12K5.244-L-PK-WM12S5.244/S5015	8076185	8076186	8076187
											
	Double-ended cordset female, angled, M12 male, straight, M12	4+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	K	PUR   BK	5 x 1.5	PK-WM12K5.244-L-PK-AM12S5.244/S5015	8076204	8076205	8076206
											
	Double-ended cordset female, angled, M12 male, angled, M12	4+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	K	PUR   BK	5 x 1.5	PK-WM12K5.244-L-PK-WM12S5.244/S5015	8076195	8076196	8076197
											
	Receptacle female, straight, M12 Wire contact Front wall-mounting	4+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	K	5 x 1.5	PK-FVM12KU5.244-0,2/M16/S5015	8087065			
				12A	K	5 x 2.5	PK-FVM12KU5.244-0,2/M16/S5025	8086173			
	Receptacle female, straight, M12 Wire contact Back wall-mounting	4+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	K	5 x 1.5	PK-FHM12KU5.244-0,2/M16/S5015	8087062			
				12A	K	5 x 2.5	PK-FHM12KU5.244-0,2/M16/S5025	8086169			

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Body				Cable			L = cable length*		
		Pins	U[max]	I[max]	Cod.	Material	Ø[mm²]	Item description	2m / 1m	5m / 2m	10m / 5m
	Receptacle male, straight, M12 Wire contact Front wall-mounting	4+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	K	5 x 1.5	PK-FVM12SU5.244-0,2/M16/S5015	8087064			
				12A	K	5 x 2.5	PK-FVM12SU5.244-0,2/M16/S5025	8086174			
	Receptacle male, straight, M12 Wire contact Back wall-mounting	4+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	K	5 x 1.5	PK-FHM12SU5.244-0,2/M16/S5015	8087063			
				12A	K	5 x 2.5	PK-FHM12SU5.244-0,2/M16/S5025	8086170			
	Receptacle female, straight, M12 Print contact Back wall-mounting	4+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	K		PK-FHM12KU5-P/M16	8086171			
	Receptacle male, straight, M12 Print contact Back wall-mounting	4+PE	630V <sub>AC</sub>   600V <sub>AC</sub> (UL)	12A	K		PK-FHM12SU5-P/M16	8086172			
	Field-wireable connector female, straight, M12 Screw-/clamp contact	4+PE	630V <sub>DC</sub>	12A	K		PK-WAKC5K	8086298			
	Field-wireable connector male, straight, M12 Screw-/clamp contact	4+PE	630V <sub>DC</sub>	12A	K		PK-WASC5K	8086297			
	T-splitter	4+PE	500V <sub>AC</sub>	12A	K		PK-TM12-S5-2K5	8075810			
	h-splitter	4+PE	500V <sub>AC</sub>	12A	K		PK-3HM12-S5-2K5	8075817			
	H-splitter	4+PE	500V <sub>AC</sub>	12A	K		PK-4HM12-S5-3K5	8075818			
	Single-ended cordset female, straight, M12	4	63V <sub>DC</sub>	16A	L	PUR   BK 4 x 1.5	PL-AM12K4-L/S5015	8076483	8076484	8076523	
				16A	L	PUR   BK 4 x 2.5	PL-AM12K4-L/S5025	8076486	8076487	8076524	
		4+FE	63V <sub>DC</sub>	16A	L	PUR   GY 5 x 1.5	PL-AM12K5.269-L/S5015GY	8075323	8075324	8075325	
				16A	L	PUR   GY 5 x 2.5	PL-AM12K5.269-L/S5025GY	8075257	8075258	8075260	










\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Body				Cable			L = cable length*		
		Pins	U[max]	I[max]	Cod.	Material	Ø[mm²]	Item description	2m / 1m	5m / 2m	10m / 5m
	Single-ended cordset female, angled, M12	4	63V <sub>DC</sub>	16A	L	PUR   BK	4 x 1.5	PL-WM12K4-L/S5015	8076489	8076490	8076525
				16A	L	PUR   BK	4 x 2.5	PL-WM12K4-L/S5025	8076492	8076493	8076526
		4+FE	63V <sub>DC</sub>	16A	L	PUR   GY	5 x 1.5	PL-WM12K5.269-L/S5015GY	8075326	8075327	8075328
				16A	L	PUR   GY	5 x 2.5	PL-WM12K5.269-L/S5025GY	8075261	8075262	8075263
	Single-ended cordset male, straight, M12	4	63V <sub>DC</sub>	16A	L	PUR   BK	4 x 1.5	PL-AM12S4-L/S5015	8076495	8076496	8076527
				16A	L	PUR   BK	4 x 2.5	PL-AM12S4-L/S5025	8076498	8076499	8076528
		4+FE	63V <sub>DC</sub>	16A	L	PUR   GY	5 x 1.5	PL-AM12S5.269-L/S5015GY	8075329	8075330	8075331
				16A	L	PUR   GY	5 x 2.5	PL-AM12S5.269-L/S5025GY	8075264	8075265	8075266
	Single-ended cordset male, angled, M12	4	63V <sub>DC</sub>	16A	L	PUR   BK	4 x 1.5	PL-WM12S4-L/S5015	8076501	8076502	8076529
				16A	L	PUR   BK	4 x 2.5	PL-WM12S4-L/S5025	8076504	8076505	8076530
		4+FE	63V <sub>DC</sub>	16A	L	PUR   GY	5 x 1.5	PL-WM12S5.269-L/S5015GY	8075333	8075334	8075335
				16A	L	PUR   GY	5 x 2.5	PL-WM12S5.269-L/S5025GY	8075267	8075268	8075269
	Double-ended cordset female, straight, M12	4	63V <sub>DC</sub>	16A	L	PUR   BK	4 x 1.5	PL-AM12K4-L-PL-AM12S4/S5015	8076457	8076458	8076459
				16A	L	PUR   BK	4 x 2.5	PL-AM12K4-L-PL-AM12S4/S5025	8076460	8076461	8076462
		4+FE	63V <sub>DC</sub>	16A	L	PUR   GY	5 x 1.5	PL-AM12K5.269-L-PL-AM12S5.269/S5015GY	8076179	8076180	8076181
				16A	L	PUR   GY	5 x 2.5	PL-AM12K5.269-L-PL-AM12S5.269/S5025GY	8076183	8076182	8076184
	Double-ended cordset female, straight, M12	4	63V <sub>DC</sub>	16A	L	PUR   BK	4 x 1.5	PL-AM12K4-L-PL-WM12S4/S5015	8076463	8076464	8076465
				16A	L	PUR   BK	4 x 2.5	PL-AM12K4-L-PL-WM12S4/S5025	8076466	8076467	8076468
		4+FE	63V <sub>DC</sub>	16A	L	PUR   GY	5 x 1.5	PL-AM12K5.269-L-PL-WM12S5.269/S5015GY	8076188	8076189	8076190
				16A	L	PUR   GY	5 x 2.5	PL-AM12K5.269-L-PL-WM12S5.269/S5025GY	8076192	8076193	8076194
	Double-ended cordset female, angled, M12	4	63V <sub>DC</sub>	16A	L	PUR   BK	4 x 1.5	PL-WM12K4-L-PL-AM12S4/S5015	8076478	8076476	8076477
				16A	L	PUR   BK	4 x 2.5	PL-WM12K4-L-PL-AM12S4/S5025	8076479	8076480	8076481
		4+FE	63V <sub>DC</sub>	16A	L	PUR   GY	5 x 1.5	PL-WM12K5.269-L-PL-AM12S5.269/S5015GY	8076207	8076208	8076209
				16A	L	PUR   GY	5 x 2.5	PL-WM12K5.269-L-PL-AM12S5.269/S5025GY	8076210	8076211	8076212
	Double-ended cordset female, angled, M12	4	63V <sub>DC</sub>	16A	L	PUR   BK	4 x 1.5	PL-WM12K4-L-PL-WM12S4/S5015	8076469	8076470	8076471
				16A	L	PUR   BK	4 x 2.5	PL-WM12K4-L-PL-WM12S4/S5025	8076472	8076473	8076475
		4+FE	63V <sub>DC</sub>	16A	L	PUR   GY	5 x 1.5	PL-WM12K5.269-L-PL-WM12S5.269/S5015GY	8076198	8076199	8076200
				16A	L	PUR   GY	5 x 2.5	PL-WM12K5.269-L-PL-WM12S5.269/S5025GY	8076201	8076202	8076203



M12x1 POWER

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.



		Body				Cable			L = cable length*		
		Pins	U[ <sub>max</sub> ]	I[ <sub>max</sub> ]	Cod.	Material	Ø[mm <sup>2</sup> ]	Item description	2m / 1m	5m / 2m	10m / 5m
	Receptacle female, straight, M12 Wire contact Front wall-mounting	4	63V <sub>DC</sub>	12A	L	4 x 1.5	PL-FVM12KU4-0,2/M16/S5015	8087068			
				16A	L	4 x 2.5	PL-FVM12KU4-0,2/M16/S5025	8086638			
		4+FE	63V <sub>DC</sub>	16A	L	5 x 1.5	PL-FVM12KU5.269-0,2/M16/S5015	8087073			
				16A	L	5 x 2.5	PL-FVM12KU5.269-0,2/M16/S5025	8086180			
	Receptacle female, straight, M12 Wire contact Back wall-mounting	4	63V <sub>DC</sub>	12A	L	4 x 1.5	PL-FHM12KU4-0,2/M16/S5015	8087066			
				16A	L	4 x 2.5	PL-FHM12KU4-0,2/M16/S5025	8086175			
		4+FE	63V <sub>DC</sub>	16A	L	5 x 1.5	PL-FHM12KU5.269-0,2/M16/S5015	8087070			
				16A	L	5 x 2.5	PL-FHM12KU5.269-0,2/M16/S5025	8086177			
	Receptacle male, straight, M12 Wire contact Front wall-mounting	4	63V <sub>DC</sub>	12A	L	4 x 1.5	PL-FVM12SU4-0,2/M16/S5015	8087069			
				16A	L	4 x 2.5	PL-FVM12SU4-0,2/M16/S5025	8086639			
		4+FE	63V <sub>DC</sub>	16A	L	5 x 1.5	PL-FVM12SU5.269-0,2/M16/S5015	8087072			
				16A	L	5 x 2.5	PL-FVM12SU5.269-0,2/M16/S5025	8086181			
	Receptacle male, straight, M12 Wire contact Back wall-mounting	4	63V <sub>DC</sub>	12A	L	4 x 1.5	PL-FHM12SU4-0,2/M16/S5015	8087067			
				16A	L	4 x 2.5	PL-FHM12SU4-0,2/M16/S5025	8086176			
		4+FE	63V <sub>DC</sub>	16A	L	5 x 1.5	PL-FHM12SU5.269-0,2/M16/S5015	8087071			
				16A	L	5 x 2.5	PL-FHM12SU5.269-0,2/M16/S5025	8086178			
	Receptacle female, straight, M12 Print contact Back wall-mounting	4	63V <sub>DC</sub>	16A	L		PL-FHM12KU4-P/M16	8086636			
		4+FE	63V <sub>DC</sub>	16A	L		PL-FHM12KU5-P/M16	8086640			
	Receptacle male, straight, M12 Print contact Back wall-mounting	4	63V <sub>DC</sub>	16A	L		PL-FHM12SU4-P/M16	8086637			
		4+FE	63V <sub>DC</sub>	16A	L		PL-FHM12SU5-P/M16	8086179			
	Field-wireable connector female, straight, M12 Screw-/clamp contact	5	63V <sub>DC</sub>	16A	L		PL-WAKC5K	8086300			
	Field-wireable connector male, straight, M12 Screw-/clamp contact	5	63V <sub>DC</sub>	16A	L		PL-WASC5K	8086299			
	T-splitter	5	63V <sub>DC</sub>	16A	L		PL-TM12-S5-2K5	8075819			


\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Body				Cable		Item description	L = cable length*		
		Pins	U[max]	I[max]	Cod.	Material	Ø[mm²]		2m / 1m	5m / 2m	10m / 5m
	h-splitter	5	63V <sub>DC</sub>	16A	L			PL-3HM12-S5-2K5	8075820		
	H-splitter	5	63V <sub>DC</sub>	16A	L			PL-4HM12-S5-3K5	8075821		


\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.



Nomenclature of 2-way splitters

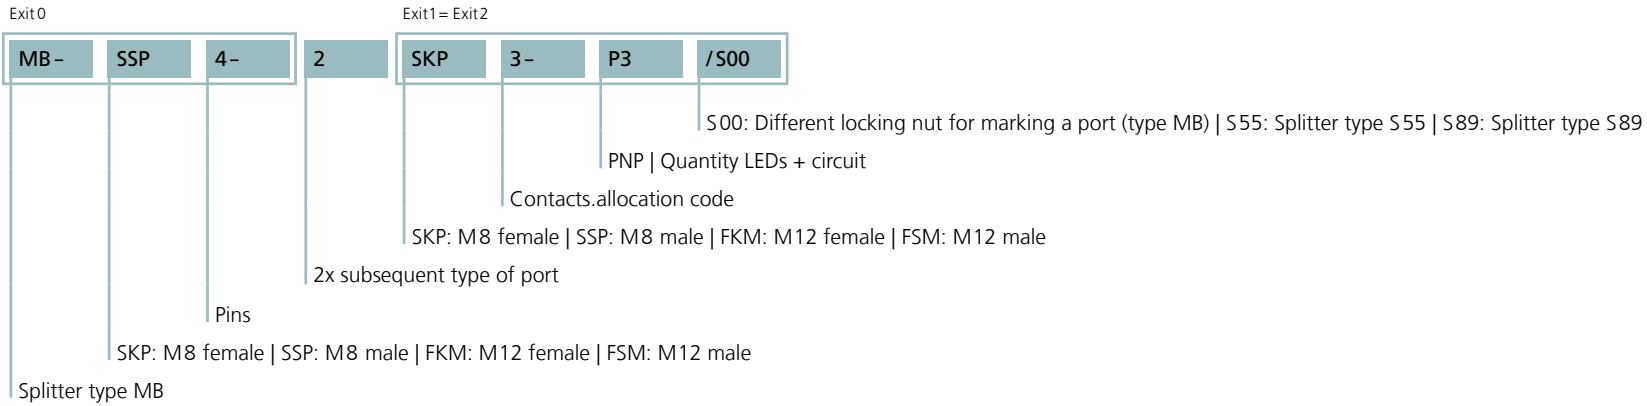

T-splitters | Y-splitters

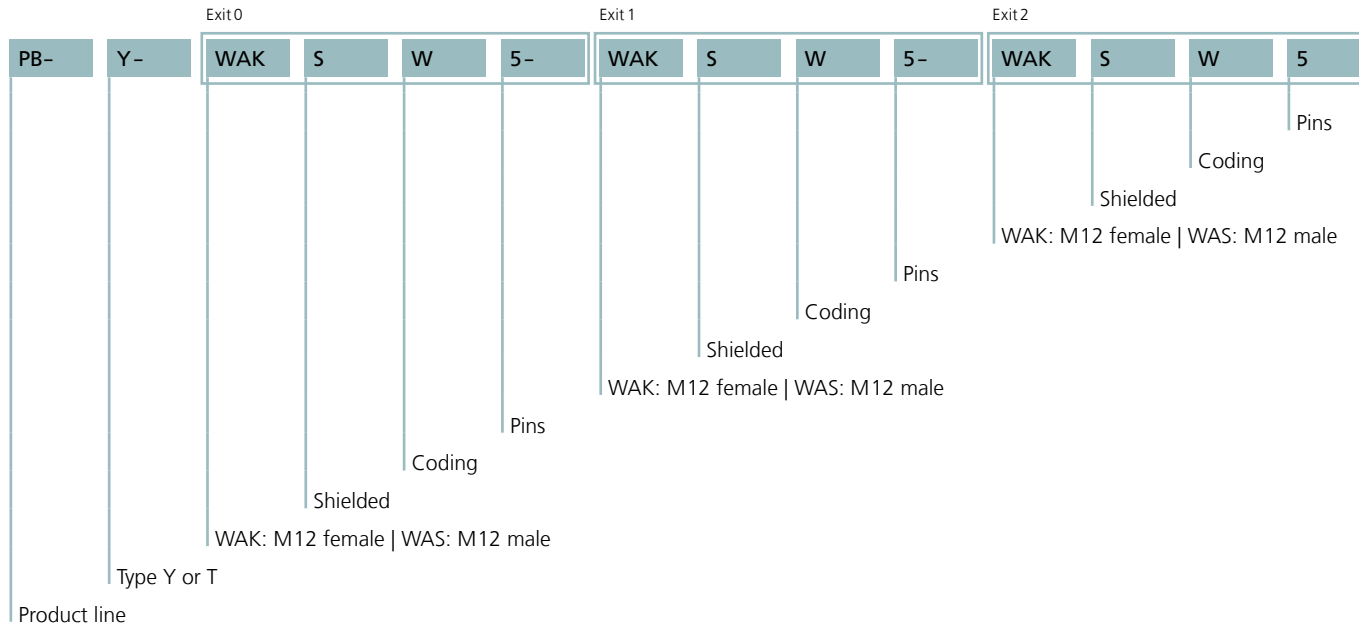



T shielded



Y



S89



MB\_M12



Y\_M12 shielded



MB\_M8






















S56















## T-splitters | Y-splitters

Technical data	Y-splitters	T-splitters	Adapters	Panel feed throughs
Insulation resistance	≥10 <sup>8</sup> Ω	≥10 <sup>8</sup> Ω	≥10 <sup>8</sup> Ω	≥10 <sup>8</sup> Ω
Ambient temperature product	-30°C...+90°C	-30°C...+90°C	-30°C...+90°C	-25°C...+85°C
Contact material	Metal, gold-plated	Metal, gold-plated	Metal	Metal, gold-plated
Contact-carrier material	Plastic, TPU	Plastic, TPU	Plastic, PA	Plastic
Grip body material	Plastic, TPU	Plastic, TPU	Plastic, TPU	
Sealing (female) material	Plastic, TPU	FPM/FKM	Plastic, TPU	
Standards	IEC 61076-2-101/-104	IEC 61076-2-101		IEC 61076-2-101
Degree of protection (mounted)	IP65, IP67, IP68	IP65, IP67, IP68	IP65, IP67, IP68	IP67
Mechanical life-cycle	>100 mating cycles	>100 mating cycles	>100 mating cycles	>100 mating cycles
Degree of pollution	3	3	3	3 (RJ45:2)














With our Y- and T-splitters you can easily place branches. Signals can be distributed directly with a 2-way junction. The ports (male or female) can be arranged in a variety of configurations, what offers you a high variability and diversity. By request, shielded splitter solutions for communication applications in the field of PROFIBUS and CANopen are available.















			Port						
			E0	E1	E2	U[max]	I[max]	Item description	Item-No.
		Y-splitter M12 S89	male, M12, LED 4 Pins, A	female, M12, LED 3 Pins, A	female, M12, LED 3 Pins, A	30V	4A	FSM4-2FKM3P3/S89	8012652
		Y-splitter M12 S89	female, M12 4 Pins, A	male, M12 3 Pins, A	male, M12 3 Pins, A	250V	4A	FKM4-2FSM3/S89	8012651
		Y-splitter M12 S89	male, M12 4 Pins, A	female, M12 3 Pins, A	female, M12 3 Pins, A	250V	4A	FSM4-2FKM3/S89	8010464
			male, M12 5 Pins, A	female, M12 5 Pins, A	female, M12 5 Pins, A	60V	4A	FSM5-2FKM5.4/S89	8010471
		Y-splitter M12 M8 - M8 S89	male, M12 4 Pins, A	female, M8 3 Pins	female, M8 3 Pins	60V	4A	FSM4-2SKP3/S89	8013058
		Y-splitter M12 MB	female, M12 5 Pins, A	male, M12 5 Pins, A	female, M12 5 Pins, A	60V	4A	MB-FKM5-FSM5-FKM5	8024976
		Y-splitter M12 MB	male, M12, LED 5 Pins, A	female, M12, LED 5 Pins, A	female, M12, LED 5 Pins, A	30V	4A	MB-FSM5-2FKM5.4P3	8024644
		Y-splitter M12 MB	male, M12 5 Pins, A	female, M12 5 Pins, A	female, M12 5 Pins, A	60V	4A	MB-FSM5-2FKM5.4	8024643
			male, M12 8 Pins, A	female, M12 8 Pins, A	female, M12 8 Pins, A	60V	2A	MB-FSM8-2FKM8	8028876
			male, M12 5 Pins, A	female, M12 5 Pins, A	female, M12 5 Pins, A	60V	4A	MB-FSM5.4-2FKM5.4/S1927	8027501


			Port			U[max]	I[max]	Item description	Item-No.
			E0	E1	E2				
		Y-splitter M12 MB	male, M12 5 Pins, A	male, M12 5 Pins, A	female, M12 5 Pins, A	60V	4A	MB-FSM5-FSM5-FKM5	8044611
		Y-splitter M12  shielded	female, M12 5 Pins, A	male, M12 5 Pins, A	female, M12 5 Pins, A	60V	4A	Y-WAKS5-WASS5-WAKS5	8057723
		Y-splitter M12  shielded	male, M12 5 Pins, A	female, M12 5 Pins, A	female, M12 5 Pins, A	60V	4A	Y-WASS5-2WAKS5	8056694
			male, M12 8 Pins, A	female, M12 8 Pins, A	female, M12 8 Pins, A	30V	2A	Y-WASS8-2WAKS8	8057725
		Y-splitter M12  shielded	male, M12 5 Pins, A	female, M12 5 Pins, A	female, M12 5 Pins, A	60V	4A	Y-WASS5-2WAKS5.4	8062356
		Y-splitter PROFIBUS M12 shielded	male, M12 5 Pins, B	male, M12 5 Pins, B	female, M12 5 Pins, B	60V	0.4A	PB-Y-WASSW5-WASSW5-WAKSW5	8057724
		Y-splitter M12  shielded	female, M12 5 Pins, A	male, M12 5 Pins, A	male, M12 5 Pins, A	30V	4A	Y-WAKS5-2WASS5	8057722
		Y-splitter M12  shielded	male, M12 5 Pins, A	male, M12 5 Pins, A	female, M12 5 Pins, A	60V	4A	Y-WASS5-WASS5-WAKS5	8057721
		Y-splitter M12 Ø8mm snap - Ø8mm snap	female, M12 4 Pins, A	male, Ø8mm snap 3 Pins	male, Ø8mm snap 3 Pins	60V	4A	FKM4-2ESP3S	8008080

			Port			U[max]	I[max]	Item description	Item-No.
			E0	E1	E2				
		Y-splitter M8 MB	male, M8 4 Pins	female, M8 3 Pins	female, M8 3 Pins	60V	4A	MB-SSP4-2SKP3/S56	8052222
			male, M8 3 Pins	female, M8 3 Pins	female, M8 3 Pins	60V	4A	MB-SSP3-2SKP3-2xAND	8083105
			male, M8 3 Pins	female, M8 3 Pins	female, M8 3 Pins	60V	4A	MB-SSP3-2SKP3	8096527
		Y-splitter M8 MB	male, M8, LED 4 Pins	female, M8, LED 3 Pins	female, M8, LED 3 Pins	30V	4A	MB-SSP4-2SKP3P3/S56	8052223
		Y-splitter M12 S55	male, M12 5 Pins, A	female, M12 5 Pins, A	female, M12 5 Pins, A	60V	4A	FSM5-2FKM5.4/S55	8018720
		Y-splitter M12 M8 - M8 S55	male, M12 4 Pins, A	female, M8 3 Pins	female, M8 3 Pins	60V	4A	FSM4-2SKP3/S55/S56	8052224
		Y-splitter M12 M8 - M8	male, M12 4 Pins, A	female, M8 3 Pins	female, M8 3 Pins	60V	4A	FSM4-2SKP3	8008081
		Y-splitter M8/Ø8mm snap M8 - M8	male, M8/Ø8mm snap 4 Pins	female, M8 3 Pins	female, M8 3 Pins	60V	4A	SESP4S-2SKP3	8008082
		T-splitter M12	female, M12 4 Pins, A	female, M12 4 Pins, A	male, M12 4 Pins, A	250V	4A	FKM4-FKM4-FSM4	8009675
			female, M12 5 Pins, A	female, M12 5 Pins, A	male, M12 5 Pins, A	60V	4A	FKM5-FKM5-FSM5	8011661
			female, M12 8 Pins, A	female, M12 8 Pins, A	male, M12 8 Pins, A	30V	2A	FKM8-FKM8-FSM8	8038856



			Port						
			E0	E1	E2	U[max]	I[max]	Item description	Item-No.
		T-splitter M12	female, M12 4 Pins, A	male, M12 4 Pins, A	male, M12 4 Pins, A	250V	4A	FKM4-FSM4-FSM4	8008139
			female, M12 5 Pins, A	male, M12 5 Pins, A	male, M12 5 Pins, A	60V	4A	FKM5-FSM5-FSM5	8017792
		T-splitter CANopen/DeviceNet M12	female, M12 5 Pins, A	female, M12 5 Pins, A	male, M12 5 Pins, A	60V	4A	FKM5-FKM5-FSM5/S222	8035172
		T-splitter M12	female, M12 4 Pins, A	female, M12 4 Pins, A	male, M12 4 Pins, A	250V	4A	T-WAKS4-WAKS4-WASS4	8060493
		shielded	female, M12 5 Pins, A	female, M12 5 Pins, A	male, M12 5 Pins, A	60V	4A	T-WAKS5-WAKS5-WASS5	8056693
			female, M12 8 Pins, A	female, M12 8 Pins, A	male, M12 8 Pins, A	30V	2A	T-WAKS8-WAKS8-WASS8	8057720
		T-splitter M12  shielded	female, M12 5 Pins, A	male, M12 5 Pins, A	male, M12 5 Pins, A	60V	4A	T-WAKS5-WASS5-WASS5	8057718
		T-splitter PROFIBUS M12 shielded	female, M12 5 Pins, B	male, M12 5 Pins, B	male, M12 5 Pins, B	60V	0.4A	PB-T-WAKSW5-WASSW5-WASSW5	8057719
		Adapter M12 - M12	female, M12 5 Pins, A	female, M12 5 Pins, A		60V	4A	WAK4.5-WAK4.5	8041351
		Adapter M12 - M12	female, M12 5 Pins, A	male, M12 5 Pins, A		60V	4A	WAK4.5-WAS4.5	8041349

			Port						
			E0	E1	E2	U[max]	I[max]	Item description	Item-No.
		Adapter M12 - M12	male, M12 5 Pins, A	male, M12 5 Pins, A		60V	4A	WAS4.5-WAS4.5	8041352
		Adapter M12 - M8	male, M12 3 Pins, A	female, M8 3 Pins		60V	4A	FSM3-SKP3	8008079
			male, M12 4 Pins, A	female, M8 4 Pins		60V	4A	FSM4-SKP4	8008138
		Panel feed through M12 - M12	female, straight, M12 4 Pins, A	male, straight, M12 4 Pins, A		250V	4A	FKFS4/M12	8018404
			female, straight, M12 5 Pins, A	male, straight, M12 5 Pins, A		60V	4A	FKFS4.5/M12	8018405
			female, straight, M12 8 Pins, A	male, straight, M12 8 Pins, A		30V	2A	FKFS8/M12	8018410
		Adapter Industrial Ethernet M12 - M12 shielded	female, straight, M12 4 Pins, D	female, straight, M12 4 Pins, D		250V	4A	IE-WAKSY4-IE-WAKSY4	8065952
		Adapter Industrial Ethernet M12 - M12 shielded	female, straight, M12 8 Pins, X	female, straight, M12 8 Pins, X		50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A	IE-WAKSX8-IE-WAKSX8	8065951
		Adapter Industrial Ethernet M12 - M12 shielded	female, straight, M12 8 Pins, X	female, straight, M12 4 Pins, D		50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A	IE-WAKSX8-IE-WAKSY4	8065950
		Panel feed through Industrial Ethernet M12 - RJ 45 shielded	female, straight, M12 4 Pins, D	female, straight, RJ45 8 Pins		50V <sub>AC/DC</sub>	0.2A	IE-FKFDY4-RJ45KS	8069793

			Port						
			E0	E1	E2	U[max]	I[max]	Item description	Item-No.
		Panel feed through Industrial Ethernet M12 - RJ 45 shielded	female, angled, M12 4 Pins, D	female, straight, RJ45 8 Pins		50V <sub>AC/DC</sub>	0.2A	IE-WFKFDSY4-RJ45KS	8069794
		Panel feed through Industrial Ethernet M12 - RJ 45 shielded	female, straight, M12 8 Pins, X	female, straight, RJ45 8 Pins		50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A	IE-FKFDSX8-RJ45KS	8055773
		Panel feed through Industrial Ethernet M12 - RJ 45 shielded	female, angled, M12 8 Pins, X	female, straight, RJ45 8 Pins		50V <sub>AC</sub>   60V <sub>DC</sub>	0.5A	IE-WFKFDSX8-RJ45KS	8055774
		Adapter Valve M12	male, angled, Valve A	M12x1, 5 poles A		24V <sub>AC/DC</sub>	4A	VA22-24.1-WAS5.002	8055767
		Adapter Valve M12	male, angled, Valve A	M12x1, 5 poles A		24V <sub>AC/DC</sub>	4A	VA22-24.3-WAS5.002	8055768
		Adapter Valve M12	male, angled, Valve A	M12x1, 5 poles A		60V <sub>AC/DC</sub>	4A	VA22-60.0-WAS5.002	8055770
		Adapter Valve M12	male, angled, Valve A	M12x1, 5 poles A		24V <sub>DC</sub>	4A	VA41-24.2-WAS5	8055769

Nomenclature

Overmolded connector at exit E1 + exit E2

Overmolded valve connector at exit E1 + exit E2

YK-	FK	4	M8-	2	AL-	SW	KP	3	P2-	L/	L/	S370
-----	----	---	-----	---	-----	----	----	---	-----	----	----	------

Cable quality  
 Cable length exit E2  
 Cable length exit 1  
 PNP | Quantity LEDs + circuit  
 Number of pins  
 M8 KP: female | SP: male  
 M12 WAK: female | WAS: male  
 M8 SW: screw-type, angled | S: screw-type, straight  
 M12 W: angled | without: straight  
 Automation Line  
 2x subsequent type of port (exit E1 + exit E2)  
 Type exit 0: M8 | M12  
 Number of pins exit E0  
 FK: female receptacle | FS: male receptacle  
 Junction-system with cable-outlet


2	V	A	22	24.	3
---	---	---	----	-----	---

Circuit LED  
 3: +suppressor diode  
 4: +Z-diode  
 $U_{[max]}$ : 24Vdc | 24VAC/DC  
 Contacts 21: 2+PE  
 22: 2+PE gebrückt  
 Type: A | B | BI | C | CI  
 Valve connector  
 2x subsequent type of port (exit E1 + exit E2)

Y-splitters with cable outlet



Cable	Material	UL	Colour	Features	drag chain-adapted	torsion resistant	welding sparks resistant
P00	PVC/PVC		GY				
S370	PUR/PP	✓	BK		✓	✓	✓
S7400	PUR/PP	✓	OG	robotic, for high mechanical stresses	✓	✓	✓

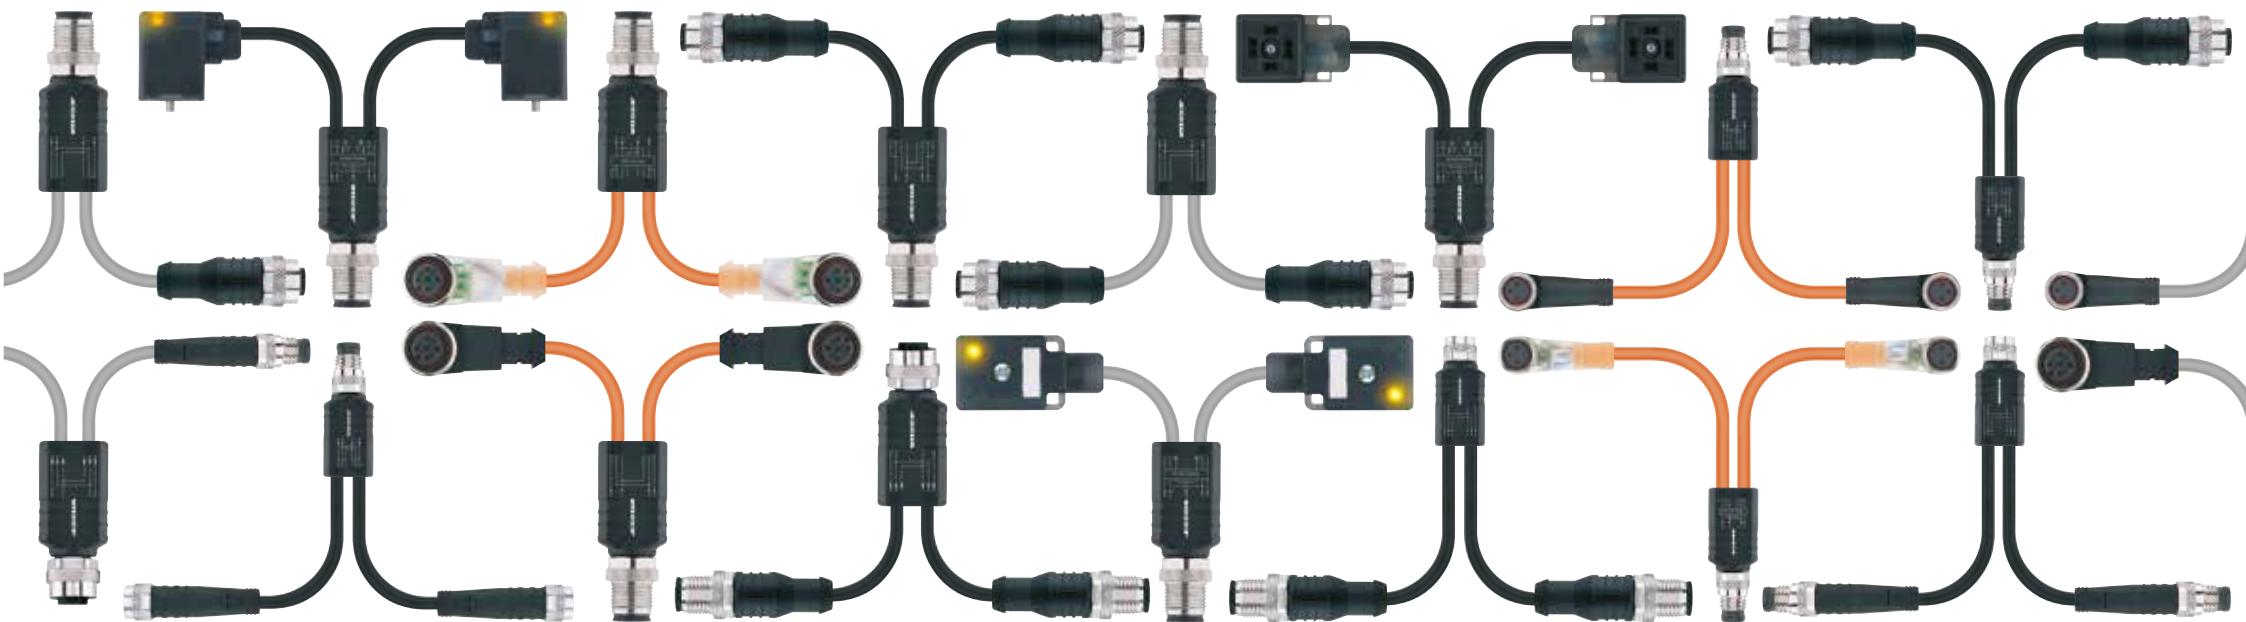















## Y-splitters with cable outlet

Technical data	M12	M8	Valve connectors
Insulation resistance	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$
Ambient temperature product	-30°C...+90°C	-30°C...+90°C	-30°C...+90°C
Contact material	Metal, gold-plated	Metal, gold-plated	Metal, silver-plated
Contact-carrier material	Plastic, TPU	Plastic, TPU	Plastic, PA, BK
Grip body material	Plastic, TPU	Plastic, TPU	Plastic, TPU
Coupling nut material	Metal, nickel-plated	Metal, nickel-plated	
Sealing (female) material	FPM/FKM	FPM/FKM	Plastic, TPU
Standards	IEC 61076-2-101	IEC 61076-2-104	DIN EN 175301-803
Degree of protection (mounted)	IP65, IP67, IP68	IP65, IP67, IP68	IP65, IP67, IP68
Mechanical life-cycle	>100 mating cycles	>100 mating cycles	>100 mating cycles
Degree of pollution	3	3	3















The extremely compact Y-splitters with cable outlet are available in M8 and M12 housing styles. Male and female connector alignment is customer freely selectable. All standard cables in PUR and PVC for cable outlets are available. The cable outlets can be equipped with M8-, M12- or valve connectors upon request. As a result of the various options, a high diversity will facilitate product configuration for nearly any application.















		L = cable length										
		E0	E1 + E2	Cable	Item description	0,3m	0,6m	1m	2m	3m	5m	10m
		female, M12, straight 4 Pins, A	open cable end	PVC	YK-FK4M12-L/L/P00				8075696		8075697	8075698
				PUR	YK-FK4M12-L/L/S370				8075693		8075694	8075695
				PUR	YK-FK4M12-L/L/S7400				8075699		8075700	8075701
		female, M12, straight 4 Pins, A	male, M12, straight 3 Pins, A	PVC	YK-FK4M12-2AL-WAS3-L/L/P00	8075999	8076005	8076011	8076014	8076018	8076021	
				PUR	YK-FK4M12-2AL-WAS3-L/L/S370	8075930	8075937	8075942	8075944	8075946	8075948	
				PUR	YK-FK4M12-2AL-WAS3-L/L/S7400	8076028	8076030	8076034	8076041	8076083	8076087	
		female, M12, straight 4 Pins, A	male, M8, straight 3 Pins, A	PVC	YK-FK4M12-2AL-SSP3-L/L/P00	8075902	8075903	8075904	8075905	8075906	8075907	
				PUR	YK-FK4M12-2AL-SSP3-L/L/S370	8075852	8075890	8075891	8075892	8075893	8075894	
				PUR	YK-FK4M12-2AL-SSP3-L/L/S7400	8075908	8075909	8075910	8075922	8075925	8075927	
		male, M12, straight 4 Pins, A	open cable end	PVC	YK-FS4M12-L/L/P00				8075705		8075706	8075707
				PUR	YK-FS4M12-L/L/S370				8075702		8075703	8075704
				PUR	YK-FS4M12-L/L/S7400				8075708		8075709	8075710
		male, M12, straight 4 Pins, A	female, M12, straight 3 Pins, A	PVC	YK-FS4M12-2AL-WAK3-L/L/P00	8075968	8075969	8075970	8075971	8075973	8075979	
				PUR	YK-FS4M12-2AL-WAK3-L/L/S370	8075943	8075947	8075950	8075951	8075953	8075955	
				PUR	YK-FS4M12-2AL-WAK3-L/L/S7400	8075992	8075993	8075994	8075998	8076002	8076009	
		male, M12, straight 4 Pins, A	female, M12, straight 4 Pins, A	PVC	YK-FS4M12-2AL-WAK4-L/L/P00	8076259	8076261	8076262	8076263	8076265	8076266	
				PUR	YK-FS4M12-2AL-WAK4-L/L/S370	8076222	8076224	8076226	8076227	8076228	8076230	
				PUR	YK-FS4M12-2AL-WAK4-L/L/S7400	8076286	8076288	8076289	8076291	8076292	8076294	
		male, M12, straight 4 Pins, A	female, M12, angled 3 Pins, A	PVC	YK-FS4M12-2AL-WWAK3-L/L/P00	8076082	8076085	8076089	8076092	8076094	8076096	
				PUR	YK-FS4M12-2AL-WWAK3-L/L/S370	8076038	8076045	8076048	8076052	8076055	8076062	
				PUR	YK-FS4M12-2AL-WWAK3-L/L/S7400	8076108	8076109	8076110	8076111	8076112	8076113	









				L = cable length								
		E0	E1 + E2	Cable	Item description	0,3m	0,6m	1m	2m	3m	5m	10m
		male, M12, straight 4 Pins, A	female, M12, angled 4 Pins, A	PVC	YK-FS4M12-2AL-WWAK4-L/L/P00	8076357	8076358	8076359	8076360	8076361	8076362	
				PUR	YK-FS4M12-2AL-WWAK4-L/L/S370	8076333	8076334	8076336	8076338	8076340	8076343	
				PUR	YK-FS4M12-2AL-WWAK4-L/L/S7400	8076367	8076368	8076369	8076370	8076371	8076372	
		male, M12, straight 4 Pins, A	female, M12, angled, with LED 3 Pins, A	PVC	YK-FS4M12-2AL-WWAK3P2-L/L/P00	8076126	8076127	8076129	8076130	8076132	8076134	
				PUR	YK-FS4M12-2AL-WWAK3P2-L/L/S370	8076117	8076119	8076121	8076123	8076124	8076125	
				PUR	YK-FS4M12-2AL-WWAK3P2-L/L/S7400	8076136	8076138	8076139	8076141	8076142	8076143	
		male, M12, straight 4 Pins, A	female, M12, angled, with LED 4 Pins, A	PVC	YK-FS4M12-2AL-WWAK4P2-L/L/P00	8076386	8076387	8076388	8076389	8076390	8076391	
				PUR	YK-FS4M12-2AL-WWAK4P2-L/L/S370	8076374	8076375	8076376	8076377	8076378	8076379	
				PUR	YK-FS4M12-2AL-WWAK4P2-L/L/S7400	8076395	8076396	8076397	8076398	8076399	8076400	
		male, M12, straight 4 Pins, A	female, M8, straight 3 Pins, A	PVC	YK-FS4M12-2AL-SKP3-L/L/P00	8076114	8076115	8076116	8076118	8076120	8076122	
				PUR	YK-FS4M12-2AL-SKP3-L/L/S370	8076101	8076103	8076104	8076105	8076106	8076107	
				PUR	YK-FS4M12-2AL-SKP3-L/L/S7400	8076128	8076131	8076133	8076135	8076137	8076140	
		male, M12, straight 4 Pins, A	female, M8, straight 4 Pins, A	PVC	YK-FS4M12-2AL-SKP4-L/L/P00	8075923	8075924	8075926	8075928	8075932	8075936	
				PUR	YK-FS4M12-2AL-SKP4-L/L/S370	8075914	8075917	8075918	8075919	8075920	8075921	
				PUR	YK-FS4M12-2AL-SKP4-L/L/S7400	8075938	8075939	8075940	8075941	8075945	8075949	
		male, M12, straight 4 Pins, A	female, M8, angled 3 Pins, A	PVC	YK-FS4M12-2AL-SWKP3-L/L/P00	8076150	8076151	8076152	8076153	8076154	8076157	
				PUR	YK-FS4M12-2AL-SWKP3-L/L/S370	8076144	8076145	8076146	8076147	8076148	8076149	
				PUR	YK-FS4M12-2AL-SWKP3-L/L/S7400	8076268	8076270	8076272	8076275	8076280	8076284	
		male, M12, straight 4 Pins, A	female, M8, angled 4 Pins, A	PVC	YK-FS4M12-2AL-SWKP4-L/L/P00	8076012	8076016	8076019	8076022	8076023	8076024	
				PUR	YK-FS4M12-2AL-SWKP4-L/L/S370	8075952	8075954	8075958	8075997	8076003	8076006	
				PUR	YK-FS4M12-2AL-SWKP4-L/L/S7400	8076025	8076026	8076027	8076029	8076032	8076035	

				L = cable length									
		E0	E1 + E2	Cable	Item description	0,3m	0,6m	1m	2m	3m	5m	10m	
		male, M12, straight 4 Pins, A	female, M8, angled, with LED 3 Pins, A	PVC	YK-FS4M12-2AL-SWKP3P2-L/L/P00	8075859	8076363	8076364	8076365	8076366	8076373		
				PUR	YK-FS4M12-2AL-SWKP3P2-L/L/S370	8076320	8076322	8076324	8076327	8076329	8076331		
				PUR	YK-FS4M12-2AL-SWKP3P2-L/L/S7400	8076380	8076381	8076382	8076383	8076384	8076385		
		male, M12, straight 4 Pins, A	female, M8, angled, with LED 4 Pins, A	PVC	YK-FS4M12-2AL-SWKP4P2-L/L/P00	8076049	8076050	8076057	8076061	8076064	8076067		
				PUR	YK-FS4M12-2AL-SWKP4P2-L/L/S370	8076039	8076042	8076043	8076044	8076046	8076047		
				PUR	YK-FS4M12-2AL-SWKP4P2-L/L/S7400	8076070	8076071	8076072	8076073	8076076	8076079		
		male, M12, straight 4 Pins, A	female, M8, straight 4 Pins, A	PUR	YK-FS4M12-2AL-SKP4.028-L/L/S370	8086653	8086654	8086655	8086582	8086656	8086583		
		male, M12, straight 4 Pins, A	female, M8, angled 4 Pins, A	PUR	YK-FS4M12-2AL-SWKP4.028-L/L/S370	8086657	8086658	8086659	8086585	8086660	8086586		
		female, M8, straight 4 Pins, A	open cable end	PVC	YK-FK4M8-L/L/P00				8074375		8075666	8075667	
				PUR	YK-FK4M8-L/L/S370				8074373		8075664	8075665	
				PUR	YK-FK4M8-L/L/S7400				8074376		8075668	8075669	
		female, M8, straight 4 Pins, A	male, M8, straight 3 Pins, A	PVC	YK-FK4M8-2AL-SSP3-L/L/P00	8075855	8075929	8075931	8075933	8075934	8075935		
				PUR	YK-FK4M8-2AL-SSP3-L/L/S370	8075846	8075911	8075912	8075913	8075915	8075916		
				PUR	YK-FK4M8-2AL-SSP3-L/L/S7400	8075961	8075963	8075964	8075965	8075966	8075967		
		female, M8, straight 4 Pins, A	male, M12, straight 3 Pins, A	PVC	YK-FK4M8-2AL-WAS3-L/L/P00	8075995	8075996	8076000	8076001	8076004	8076007		
				PUR	YK-FK4M8-2AL-WAS3-L/L/S370	8075980	8075981	8075982	8075984	8075986	8075989		
				PUR	YK-FK4M8-2AL-WAS3-L/L/S7400	8076059	8076063	8076065	8076066	8076068	8076069		




				L = cable length									
		E0	E1 + E2	Cable	Item description	0,3m	0,6m	1m	2m	3m	5m	10m	
		male, M8, straight 4 Pins, A	female, M12, straight 3 Pins, A	PVC	YK-FS4M8-2AL-WAK3-L/L/P00	8076231	8076232	8076233	8076234	8076236	8076239		
				PUR	YK-FS4M8-2AL-WAK3-L/L/S370	8076215	8076219	8076221	8076223	8076225	8076229		
				PUR	YK-FS4M8-2AL-WAK3-L/L/S7400	8076243	8076244	8076245	8076246	8076247	8076248		
		male, M8, straight 4 Pins, A	female, M12, straight 4 Pins, A	PVC	YK-FS4M8-2AL-WAK4-L/L/P00	8076235	8076237	8076238	8076240	8076241	8076242		
				PUR	YK-FS4M8-2AL-WAK4-L/L/S370	8076213	8076214	8076216	8076217	8076218	8076220		
				PUR	YK-FS4M8-2AL-WAK4-L/L/S7400	8076250	8076251	8076253	8076255	8076256	8076258		
		male, M8, straight 4 Pins, A	female, M12, angled 3 Pins, A	PVC	YK-FS4M8-2AL-WWAK3-L/L/P00	8076267	8076269	8076271	8076273	8076276	8076283		
				PUR	YK-FS4M8-2AL-WWAK3-L/L/S370	8076249	8076252	8076254	8076257	8076260	8076264		
				PUR	YK-FS4M8-2AL-WWAK3-L/L/S7400	8076285	8076287	8076290	8076293	8076295	8076296		
		male, M8, straight 4 Pins, A	female, M12, angled 4 Pins, A	PVC	YK-FS4M8-2AL-WWAK4-L/L/P00	8076297	8076298	8076300	8076301	8076302	8076303		
				PUR	YK-FS4M8-2AL-WWAK4-L/L/S370	8076274	8076277	8076278	8076279	8076281	8076282		
				PUR	YK-FS4M8-2AL-WWAK4-L/L/S7400	8076309	8076311	8076312	8076315	8076318	8076319		
		male, M8, straight 4 Pins, A	female, M12, angled, with LED 3 Pins, A	PVC	YK-FS4M8-2AL-WWAK3P2-L/L/P00	8076310	8076313	8076314	8076316	8076317	8076321		
				PUR	YK-FS4M8-2AL-WWAK3P2-L/L/S370	8076299	8076304	8076305	8076306	8076307	8076308		
				PUR	YK-FS4M8-2AL-WWAK3P2-L/L/S7400	8076323	8076325	8076326	8076328	8076330	8076332		
		male, M8, straight 4 Pins, A	female, M12, angled, with LED 4 Pins, A	PVC	YK-FS4M8-2AL-WWAK4P2-L/L/P00	8076345	8076346	8076347	8076348	8076349	8076350		
				PUR	YK-FS4M8-2AL-WWAK4P2-L/L/S370	8076335	8076337	8076339	8076341	8076342	8076344		
				PUR	YK-FS4M8-2AL-WWAK4P2-L/L/S7400	8076351	8076352	8076353	8076354	8076355	8076356		
		male, M8, straight 4 Pins, A	open cable end	PVC	YK-FS4M8-L/L/P00				8074377		8075672	8075673	
				PUR	YK-FS4M8-L/L/S370				8074374		8075670	8075671	
				PUR	YK-FS4M8-L/L/S7400				8074378		8075674	8075675	

		L = cable length										
		E0	E1 + E2	Cable	Item description	0,3m	0,6m	1m	2m	3m	5m	10m
		male, M8, straight 4 Pins, A	female, M8, straight 3 Pins, A	PVC	YK-FS4M8-2AL-SKP3-L/L/P00	8075972	8075974	8075975	8075976	8075977	8075978	
				PUR	YK-FS4M8-2AL-SKP3-L/L/S370	8075857	8075956	8075957	8075959	8075960	8075962	
				PUR	YK-FS4M8-2AL-SKP3-L/L/S7400	8075983	8075985	8075987	8075988	8075990	8075991	
		male, M8, straight 4 Pins, A	female, M8, straight 4 Pins, A	PVC	YK-FS4M8-2AL-SKP4-L/L/P00	8076162	8076163	8076164	8076165	8076166	8076167	
				PUR	YK-FS4M8-2AL-SKP4-L/L/S370	8076155	8076156	8076158	8076159	8076160	8076161	
				PUR	YK-FS4M8-2AL-SKP4-L/L/S7400	8076168	8075856	8076169	8076170	8076171	8076172	
		male, M8, straight 4 Pins, A	female, M8, angled 3 Pins, A	PVC	YK-FS4M8-2AL-SWKP3-L/L/P00	8075858	8076031	8076033	8076036	8076037	8076040	
				PUR	YK-FS4M8-2AL-SWKP3-L/L/S370	8076008	8076010	8076013	8076015	8076017	8076020	
				PUR	YK-FS4M8-2AL-SWKP3-L/L/S7400	8076051	8076053	8076054	8076056	8076058	8076060	
		male, M8, straight 4 Pins, A	female, M8, angled 4 Pins, A	PVC	YK-FS4M8-2AL-SWKP4-L/L/P00	8076392	8076393	8076394	8076401	8076402	8076403	
				PUR	YK-FS4M8-2AL-SWKP4-L/L/S370	8076173	8076174	8076175	8076176	8076177	8076178	
				PUR	YK-FS4M8-2AL-SWKP4-L/L/S7400	8076404	8076405	8076406	8076407	8076408	8076409	
		male, M8, straight 4 Pins, A	female, M8, angled, with LED 3 Pins, A	PVC	YK-FS4M8-2AL-SWKP3P2-L/L/P00	8076084	8076086	8076088	8076090	8076091	8076093	
				PUR	YK-FS4M8-2AL-SWKP3P2-L/L/S370	8076074	8076075	8076077	8076078	8076080	8076081	
				PUR	YK-FS4M8-2AL-SWKP3P2-L/L/S7400	8076095	8076097	8076098	8076099	8076100	8076102	
		male, M8, straight 4 Pins, A	female, M8, angled, with LED 4 Pins, A	PVC	YK-FS4M8-2AL-SWKP4P2-L/L/P00	8076419	8076420	8076421	8076422	8076423	8076424	
				PUR	YK-FS4M8-2AL-SWKP4P2-L/L/S370	8076413	8076414	8076415	8076416	8076417	8076418	
				PUR	YK-FS4M8-2AL-SWKP4P2-L/L/S7400	8076425	8076426	8076427	8076428	8076429	8076430	
		male, M12, straight 5 Pins, A	female, Valve A, angled 2+PE, PE bridged Pins,	PVC	YK-FS5M12-2VA22-24.3-L/L/P00	8077612	8077671	8077614	8077615	8077616	8077617	
				PUR	YK-FS5M12-2VA22-24.3-L/L/S370	8077604	8077606	8077608	8077609	8077610	8077611	

		L = cable length										
		E0	E1 + E2	Cable	Item description	0,3m	0,6m	1m	2m	3m	5m	10m
		male, M12, straight 5 Pins, A	female, Valve B, straight 2+PE Pins,	PVC	YK-FS5M12-2VB21-24.3-L/L/P00	8077627	8077673	8077631	8077633	8077635	8077637	
				PUR	YK-FS5M12-2VB21-24.3-L/L/S370	8077618	8077672	8077620	8077621	8077623	8077625	
		male, M12, straight 5 Pins, A	female, Valve BI, angled 2+PE Pins,	PVC	YK-FS5M12-2VBI21-24.3-L/L/P00	8077603	8077605	8077607	8077622	8077624	8077626	
				PUR	YK-FS5M12-2VBI21-24.3-L/L/S370	8077639	8077674	8077644	8077646	8077648	8077651	
		male, M12, straight 5 Pins, A	female, Valve C, angled 2+PE, PE bridged Pins,	PVC	YK-FS5M12-2VC22-24.4-L/L/P00	8077640	8077641	8077643	8077645	8077647	8077649	
				PUR	YK-FS5M12-2VC22-24.4-L/L/S370	8077628	8077630	8077632	8077634	8077636	8077638	
		male, M12, straight 5 Pins, A	female, Valve CI, angled 2+PE, PE bridged Pins,	PVC	YK-FS5M12-2VCI22-24.4-L/L/P00	8077658	8077659	8077660	8077661	8077663	8077664	
				PUR	YK-FS5M12-2VCI22-24.4-L/L/S370	8077650	8077652	8077654	8077655	8077656	8077657	


Nomenclature

<b>8</b>	<b>I/O</b>	<b>M8-</b>	<b>3</b>	<b>P2</b>	<b>T</b>	<b>L</b>	<b>/S370</b>
Quantity of I/O-ports	I/O-junction box	I/O port M8,   Ø8mm snap (S8)   M12	Contacts	PNP   Quantity LEDs + circuit	Connection T: top   F: front   C: cable	Cable length [m] with double-ended cordset C	Cable quality

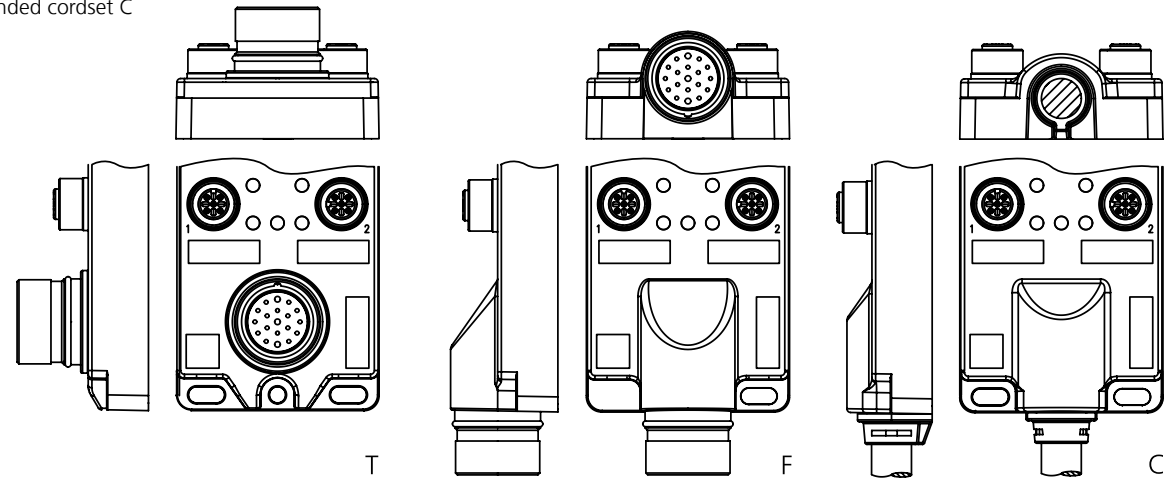

I/O-junctions | passive

Cable	Material	UL	Color	Features	drag chain-adapted	torsion resistant	welding sparks resistant
P01	PVC/PVC	✓	GY				
S370	PUR/PP	✓	BK		✓	✓	✓

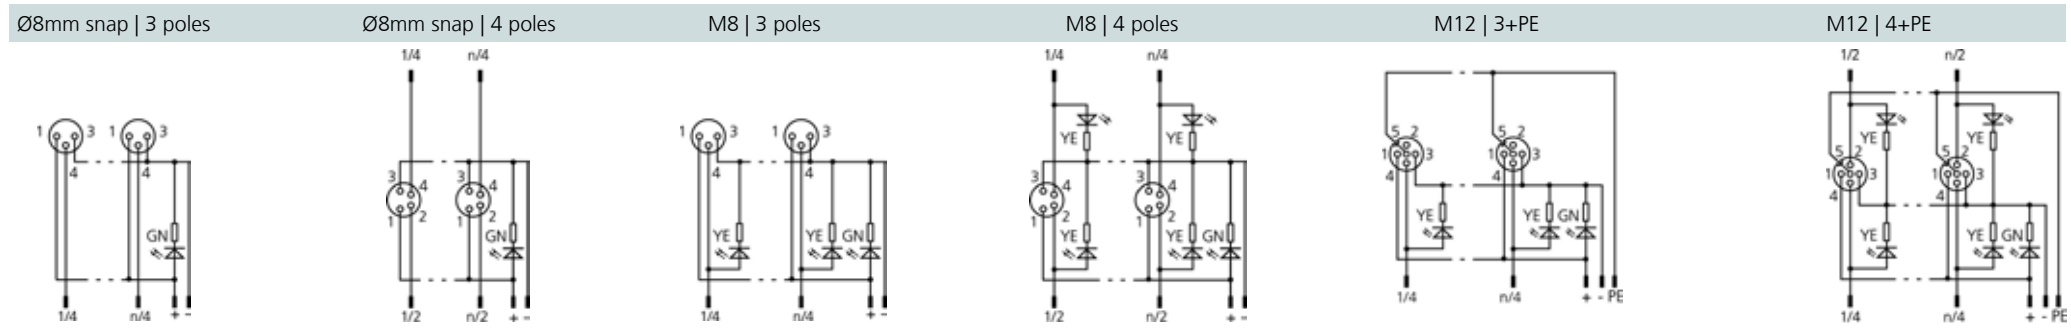












## I/O-junctions | passive

Technical data	M12	M8	Ø8mm snap
Insulation resistance	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$
Resistance	$\leq 5 m\Omega$	$\leq 5 m\Omega$	$\leq 5 m\Omega$
Ambient temperature product	-30°C...+90°C	-30°C...+90°C	-30°C...+90°C
Contact material	Metal, CuZn, gold-plated	Metal, CuZn, gold-plated	Metal, CuZn, gold-plated
Contact-carrier material	Plastic, PA, BK	Plastic, PA, BK	Plastic, PA, BK
Sealing (female) material	FPM/FKM	FPM/FKM	FPM/FKM
Standards	IEC 61076-2-101	IEC 61076-2-104	IEC 61076-2-104
Degree of protection (mounted)	IP65, IP67	IP65, IP67	IP65, IP67
Mechanical life-cycle	>100 mating cycles	>100 mating cycles	>100 mating cycles
Degree of pollution	3	3	3

M8- and M12-passive junctions from ESCHA particularly stand out for their compact housing style as well as their flexible fixing possibilities. They are predestined for harsh industrial applications through the proven full potting and a metal thread insert meeting protection classes IP65 and IP67 high requirements. Thanks to different outlets (fixed cable-, top- or front connection) you always find what you are looking for.

		I/O				L = cable length					
			Exit	Port	ΣI [max]	Item description	Male	2m	5m	10m	15m
	I/O-junction passive, M12, Top	4	3+PE	M23x1, 12 poles	12A	4I/OM12-5.4P2T	8048790				
			4+PE	M23x1, 19 poles	12A	4I/OM12-5P3T		8045895			
	I/O-junction passive, M12, Front	4	3+PE	M23x1, 12 poles	12A	4I/OM12-5.4P2F	8048791				
			4+PE	M23x1, 19 poles	12A	4I/OM12-5P3F		8045891			
	I/O-junction passive, M12, Cable	4	3+PE		12A	4I/OM12-5.4P2C-L/S370			8048792		
			4+PE		12A	4I/OM12-5P3C-L/S370			8045894		
	I/O-junction passive, M12, Top	6	3+PE	M23x1, 12 poles	12A	6I/OM12-5.4P2T	8048787				
			4+PE	M23x1, 19 poles	12A	6I/OM12-5P3T		8045896			
	I/O-junction passive, M12, Front	6	3+PE	M23x1, 12 poles	12A	6I/OM12-5.4P2F	8048788				
			4+PE	M23x1, 19 poles	12A	6I/OM12-5P3F		8045892			
	I/O-junction passive, M12, Cable	6	3+PE		12A	6I/OM12-5.4P2C-L/S370			8048789		
			4+PE		12A	6I/OM12-5P3C-L/S370			8045893		
	I/O-junction passive, M12, Top	8	3+PE	M23x1, 12 poles	12A	8I/OM12-5.4P2T	8048784				
			4+PE	M23x1, 19 poles	12A	8I/OM12-5P3T		8045647			
	I/O-junction passive, M12, Front	8	3+PE	M23x1, 12 poles	12A	8I/OM12-5.4P2F	8048785				
			4+PE	M23x1, 19 poles	12A	8I/OM12-5P3F		8045649			
	I/O-junction passive, M12, Cable	8	3+PE		12A	8I/OM12-5.4P2C-L/S370			8048786		
			4+PE		12A	8I/OM12-5P3C-L/S370			8045648		
	I/O-junction passive, M8, Top	4	3	M12x1, 8 poles	2A	4I/OM8-3P2T	8061747				



						L = cable length					
		I/O	Exit	Port	ΣI [max]	Item description	Male	2m	5m	10m	15m
	I/O-junction passive, M8, Cable	4	3		6A	4I/OM8-3P2C-L/S370		8061768	8061776	8061777	8061778
			4		6A	4I/OM8-4P3C-L/S370		8061783	8061784	8061785	8061786
	I/O-junction passive, M8, Top	8	3	M12x1, 12 poles	1.5A	8I/OM8-3P2T	8061744				
	I/O-junction passive, M8, Cable	8	3		6A	8I/OM8-3P2C-L/S370		8061794	8061796	8061797	8061798
			4		6A	8I/OM8-4P3C-L/S370		8061803	8061804	8061805	8061806
	I/O-junction passive, M8, Top	10	3	M12x1, 12 poles	1.5A	10I/OM8-3P2T	8061633				
	I/O-junction passive, M8, Cable	10	3		6A	10I/OM8-3P2C-L/S370		8061811	8061812	8061813	8061814
	I/O-junction passive, Ø8mm snap, Cable	4	3		6A	4I/OS8-3P1C-L/P01		8062806	8062807	8062808	8062809
			3		6A	4I/OS8-3P1C-L/S370		8062789	8062790	8062791	8062792
			4		6A	4I/OS8-4P1C-L/P01		8062817	8062818	8062819	8062820
			4		6A	4I/OS8-4P1C-L/S370		8062813	8062814	8062815	8062816
	I/O-junction passive, Ø8mm snap, Top	4	3	M12x1, 8 poles	4A	4I/OS8-3P1T	8062601				
			4	M12x1, 12 poles	1.5A	4I/OS8-4P1T	8062599				
	I/O-junction passive, Ø8mm snap, Cable	10	3		6A	10I/OS8-3P1C-L/P01		8062838	8062839	8062840	8062841
			3		6A	10I/OS8-3P1C-L/S370		8062825	8062826	8062827	8062828
	I/O-junction passive, Ø8mm snap, Top	10	3	M12x1, 12 poles	1.5A	10I/OS8-3P1T	8062604				

Nomenclature

8	I/O	M8-	3	P3	T	8xAND/OR
						Logic
						Connection: T: top, M12 5 poles
						PNP   Quantity LEDs + circuit
						Contacts
						I/O port: M8
						I/O-junction box
						Quantity of I/O-ports





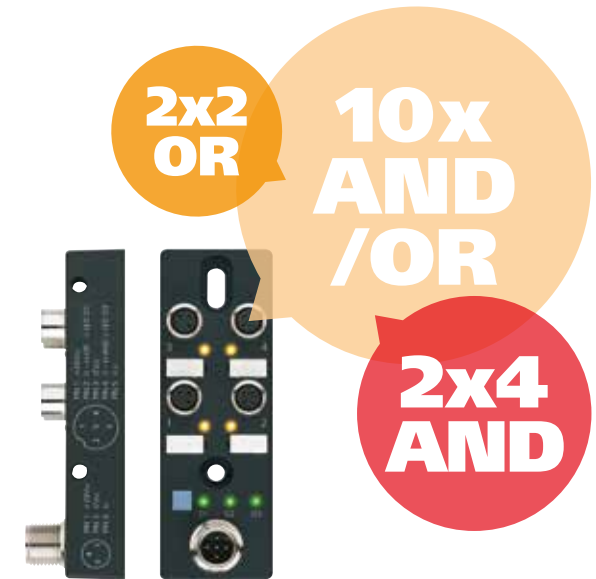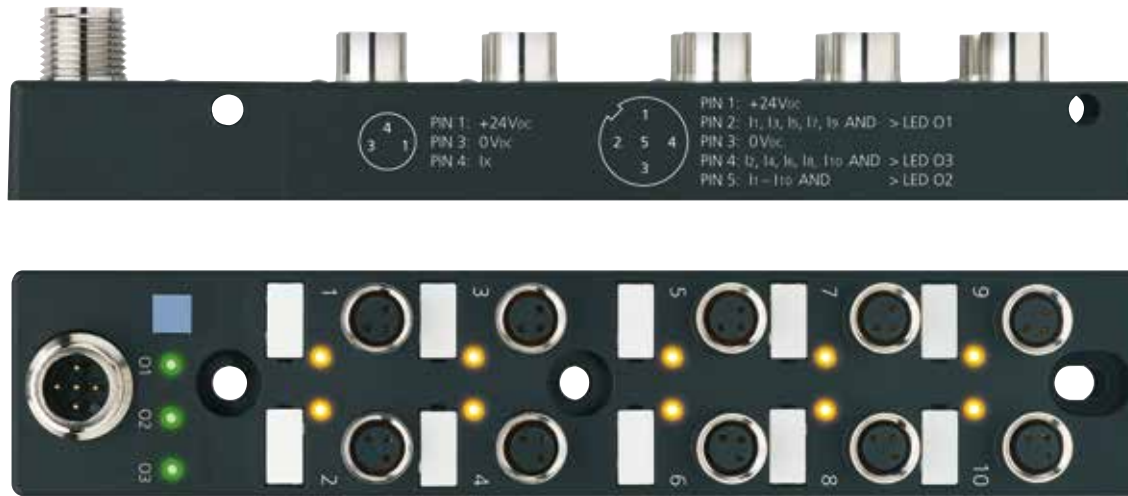



































## I/O-junctions | active

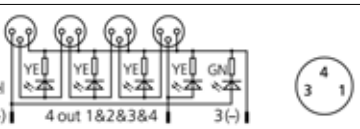
Technical data	M8
Insulation resistance	$\geq 10^8 \Omega$
Resistance	$\leq 5 m\Omega$
Ambient temperature product	-30°C...+90°C
Contact material	Metal, CuZn, gold-plated
Contact-carrier material	Plastic, PA, BK
Sealing (female) material	FPM/FKM
Standards	IEC 61076-2-104
Degree of protection (mounted)	IP65, IP67
Mechanical life-cycle	>100 mating cycles
Degree of pollution	3

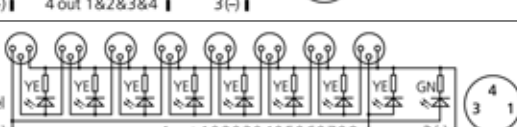The extremely compact M8 I/O-junctions with active logic-function are placing intelligence close to sensors transmitting preprocessed signals to a central control unit. In contrast to conventional passive I/O-junctions or fieldbus junctions they provide the advantage of defaulting to a unshielded 4- or 5-pole sensor cable. In this way, wiring costs as well as wiring time are reduced and wiring errors are averted. The junctions do not have to be programmed by the user due to a predefined logic and can thus be immediately operational. They are especially adapted for grippers, robots or compact handling units.

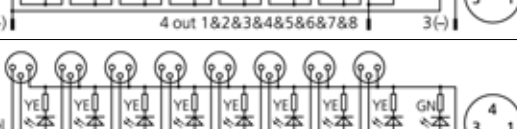	I/O		ΣI[max]	Item description	Item-No.
	4	 	1A	4I/OM8-3P3T 4x AND/OR	8081123
	4	 	1A	4I/OM8-3P4T 2x2 AND	8081125
	4	 	1A	4I/OM8-3P4T 2x2 OR	8081127
	8	 	1A	8I/OM8-3P3T 8x AND/OR	8081129
	8	 	1A	8I/OM8-3P4T 2x4 AND	8081131
	8	 	1A	8I/OM8-3P4T 2x4 OR	8081133
	10	 	1A	10I/OM8-3P3T 10x AND/OR	8081135
	10	 	1A	10I/OM8-3P4T 2x5 AND	8081137
	4	 	4A	4I/OM8-3P2T 4x passiv AND	8062606
	8	 	4A	8I/OM8-3P2T 8x passiv AND	8062608
	8	 	4A	8I/OM8-3P2T 2x4 passiv AND	8062610
	3			for open I/O	AL-SSP3-AS/S2065 8063927



Nomenclature

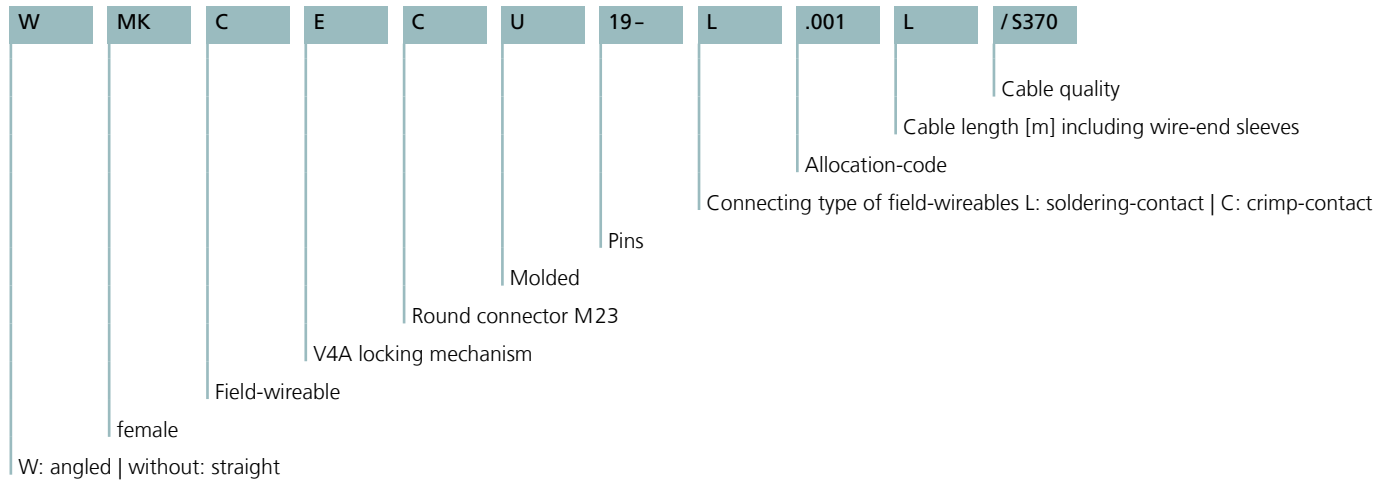

Cable	Material	UL	Color	Feature	drag chain-adapted	torsion resistant	welding sparks resistant
S370	PUR/PP	✓	BK		✓	✓	✓





M23



## M23

Technical data	M23x1	Field-wireable
Insulation resistance	≥10 <sup>8</sup> Ω	≥10 <sup>8</sup> Ω
Ambient temperature product	-30°C...+90°C	-40°C...+85°C
Contact material	Metal, gold-plated	Metal, CuZn, gold-plated
Contact-carrier material	Plastic, PBT	Plastic, PBT, GY
Grip body material	Plastic, TPU	Metal, CuZn, nickel-plated, silver-plated
Coupling nut material	Metal, nickel-plated	Metal, CuZn, nickel-plated
Sealing (female) material	Plastic, NBR	Plastic, NBR
Degree of protection (mounted)	IP65,IP67	
Mechanical life-cycle	>100 mating cycles	>100 mating cycles
Degree of pollution	3	3
Cable outlet		12 pins: 8...12mm 19 pins: 10...14mm
Connecting cross-section		12 pins: contacts 10, 11, 12: 0.75...1.0mm <sup>2</sup>   others 0.5...0.75mm <sup>2</sup> 19 pins: contacts 9, 12, 19: 0.75...1.0mm <sup>2</sup>   others 0.5...0.75mm <sup>2</sup>
Connecting type		Soldering contact

The overmoulded and field-wireable M23 connectors are perfectly adapted to our M12-passive junctions. You can choose between 12 and 19 pin versions with different configurations. Due to the ESCHA exclusive cable quality named 'S370', the M23 connectors are universally usable in different applications.

		Body			Cable			Item description	L = cable length*		
		Pins	U[max]	I[max]	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
	Single-ended cordset female, straight, M23	12	125V	4A 8A (contacts 10,11,12)	PUR	BK		MKCU12.001-L/S370	8027363	8026032	8026033
		12	125V	4A 8A (contacts 10,11,12)	PUR	BK		MKCU12.003-L/S370	8026243	8026039	8026041
		19	125V	4A 10A (contacts 9,12,19)	PUR	BK		MKCU19.001-L/S370	8027364	8026036	8026037
		19	125V	4A 10A (contacts 9,12,19)	PUR	BK		MKCU19.003-L/S370	8027365	8017221	8017222
	Single-ended cordset female, angled, M23	12	125V	4A 8A (contacts 10,11,12)	PUR	BK		WMKCU12.001-L/S370	8027366	8026043	8026044
		12	125V	4A 8A (contacts 10,11,12)	PUR	BK		WMKCU12.003-L/S370	8026244	8026049	8026050
		19	125V	4A 10A (contacts 9,12,19)	PUR	BK		WMKCU19.001-L/S370	8027368	8026046	8026047
		19	125V	4A 10A (contacts 9,12,19)	PUR	BK		WMKCU19.003-L/S370	8027370	8017111	8017112
	Field-wireable connector female, straight, M23 Soldering contact	12	150V	4A 8A (contacts 10,11,12)				MKCC12L	8013694		
		19	125V	4A 10A (contacts 9,12,19)				MKCC19L	8013696		
	Field-wireable connector female, angled, M23 Soldering contact	12	150V	4A 8A (contacts 10,11,12)				WMKCC12L	8017153		
		19	125V	4A 10A (contacts 9,12,19)				WMKCC19L	8017151		

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.





Type	Contacts
VA A	21 2+PE
VAA A straight	22 2+PE jumpered
VAAG A straight grip with thread	31 3+PE
VB B (10mm contact clearance)	41 3+PE+ wire-connection
VBI BI (11mm contact clearance)	
VC C (8mm contact clearance)	
VCI CI (9.4mm contact clearance)	

$U_{[max]}$	
24	24VDC   24VAC/DC
60	60VAC/DC
230	230VAC/DC

Circuit	
0	without
1	LED
2	LED pressure switch
3	LED+suppressor diode
4	LED+Z-diode
5	LED+varistor


Cable length	B-side
L Single-, double-ended cordset	open cable end
L1/L2 Double-valve connector	DA 22-24.3 Double-valve connector
	WAS5.002 Adapter M12, valve

S370	Cable quality
WAS5.132	DA with M12 connection

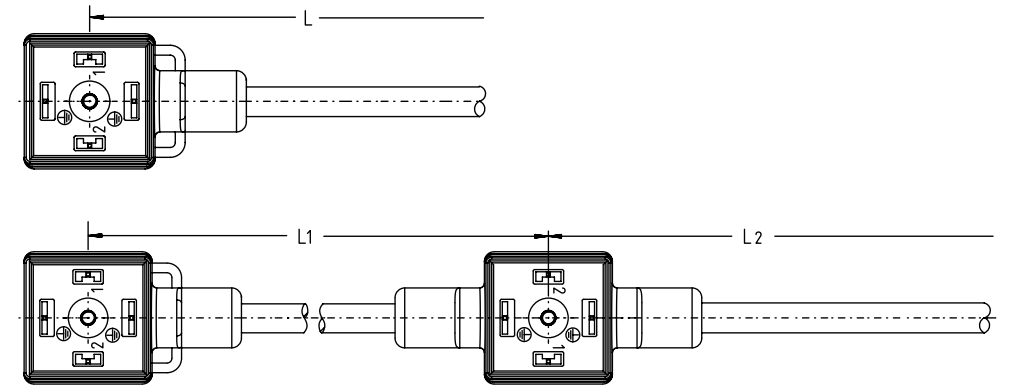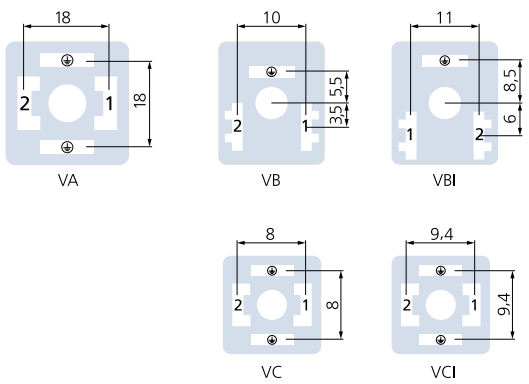

Valve connectors

Cable	Material	UL	Color	Feature	drag chain-adapted	torsion resistant	welding sparks resistant
P00	PVC/PVC		GY				
P01	PVC/PVC	✓	GY				
S370	PUR/PP	✓	BK		✓	✓	✓

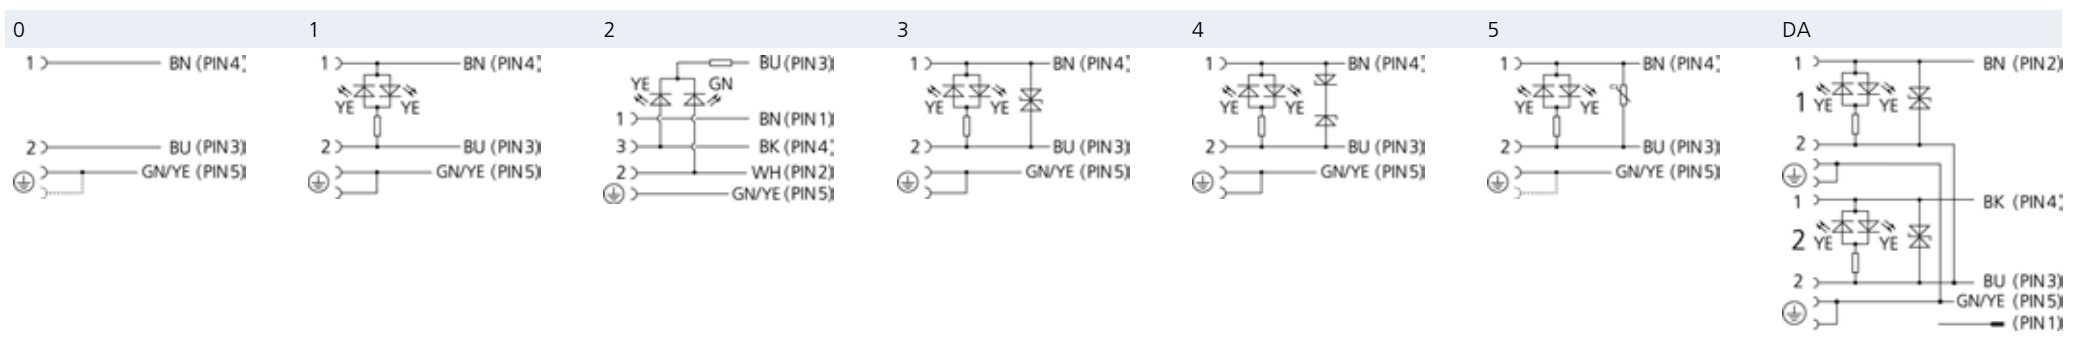











## Valve connectors

Technical data	Valve connector	M12
Insulation resistance	≥10 <sup>8</sup> Ω	≥10 <sup>8</sup> Ω
Ambient temperature product	-30°C...+90°C	-30°C...+90°C
Contact material	Metal, silver-plated	Metal, gold-plated
Contact-carrier material	Plastic, PA	Plastic, TPU
Grip body material	Plastic, TPU	Plastic, TPU
Sealing (female) material	Plastic, TPU	
Standards	DIN EN 175301-803	IEC 61076-2-101
Degree of protection (mounted)	IP65, IP67, IP68	IP65, IP67, IP68
Mechanical life-cycle	>100 mating cycles	>100 mating cycles
Degree of pollution	3	3





ESCHA valve-connectors stand for minimum installation space and excellent LED visibility in all installation positions at the same time. They are available in typical housing styles and protection circuits. A comprehensive product program with single-ended and double-ended cordsets as well as adapters and double-valve connectors offers a suitable solution for any application.

	Pins	Body		Cable			Item description	L /L2 = cable length		
		U[ $\text{max}$ ]	Circuit	Material	Color	L1[m]		2m / 1m	5m / 2m	10m / 5m
 Single-ended cordset female, angled, Valve A	2+PE	230V <sub>AC/DC</sub>	without	PUR	BK		VA21-230.0-L/S370	8050753	8047806	8050754
		230V <sub>AC/DC</sub>	without	PVC	GY		VA21-230.0-L/P00	8048838	8048841	8050824
		230V <sub>AC/DC</sub>	without	PVC	GY		VA21-230.0-L/P01	8050873	8047823	8050874
	2+PE, PE bridged	230V <sub>AC/DC</sub>	Varistor	PUR	BK		VA22-230.5-L/S370	8050755	8046704	8050756
		230V <sub>AC/DC</sub>	Varistor	PVC	GY		VA22-230.5-L/P00	8050827	8048819	8050828
		230V <sub>AC/DC</sub>	Varistor	PVC	GY		VA22-230.5-L/P01	8050875	8047824	8050876
		230V <sub>AC/DC</sub>	without	PUR	BK		VA22-230.0-L/S370	8052299	8052300	8052301
		230V <sub>AC/DC</sub>	without	PVC	GY		VA22-230.0-L/P00	8052302	8052303	8052304
		230V <sub>AC/DC</sub>	without	PVC	GY		VA22-230.0-L/P01	8052305	8052306	8052307
		30V <sub>AC/DC</sub>	Suppressor diode	PUR	BK		VA22-24.3-L/S370	8050293	8047804	8048527
		30V <sub>AC/DC</sub>	Suppressor diode	PVC	GY		VA22-24.3-L/P00	8048840	8048839	8049537
		30V <sub>AC/DC</sub>	Suppressor diode	PVC	GY		VA22-24.3-L/P01	8049306	8047821	8050863
		30V <sub>AC/DC</sub>	without	PUR	BK		VA22-24.1-L/S370	8050501	8047803	8048240
		30V <sub>AC/DC</sub>	without	PVC	GY		VA22-24.1-L/P00	8050819	8048818	8050820
		30V <sub>AC/DC</sub>	without	PVC	GY		VA22-24.1-L/P01	8050861	8046613	8050862
3+PE	230V <sub>AC/DC</sub>	without	PUR	BK		VA31-230.0-L/S370	8058325	8059241	8059242	
	230V <sub>AC/DC</sub>	without	PVC	GY		VA31-230.0-L/P00	8061939	8066062	8062016	
	230V <sub>AC/DC</sub>	without	PVC	GY		VA31-230.0-L/P01	8081356	8081355	8061577	
	30V <sub>AC/DC</sub>	Suppressor diode	PUR	BK		VA31-24.3-L/S370	8067058	8065473	8078853	
	30V <sub>AC/DC</sub>	Suppressor diode	PVC	GY		VA31-24.3-L/P00	8081328	8081329	8081330	
	30V <sub>AC/DC</sub>	Suppressor diode	PVC	GY		VA31-24.3-L/P01	8081331	8081332	8081333	
3+PE wire	30V <sub>DC</sub>	without	PUR	BK		VA41-24.2-L/S370	8050500	8047805	8049933	
	30V <sub>DC</sub>	without	PVC	GY		VA41-24.2-L/P00	8050822	8049310	8050540	
	30V <sub>DC</sub>	without	PVC	GY		VA41-24.2-L/P01	8050865	8047822	8050866	
 Single-ended cordset female, straight, Valve AA	2+PE	230V <sub>AC/DC</sub>	without	PUR	BK		VAA21-230.0-L/S370	8055720	8055721	8055722
		230V <sub>AC/DC</sub>	without	PVC	GY		VAA21-230.0-L/P00	8055726	8055727	8055728
		230V <sub>AC/DC</sub>	without	PVC	GY		VAA21-230.0-L/P01	8055732	8055733	8055734







\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

	Pins	Body		Cable			Item description	L /L2 = cable length		
		U[ $\text{max}$ ]	Circuit	Material	Color	L1[m]		2m / 1m	5m / 2m	10m / 5m
	2+PE, PE bridged	230 $\text{V}_{\text{AC/DC}}$	Varistor	PUR	BK		VAA22-230.5-L/S370	8055666	8055671	8055667
		230 $\text{V}_{\text{AC/DC}}$	Varistor	PVC	GY		VAA22-230.5-L/P00	8055690	8055691	8055692
		230 $\text{V}_{\text{AC/DC}}$	Varistor	PVC	GY		VAA22-230.5-L/P01	8055712	8055713	8055714
		30 $\text{V}_{\text{AC/DC}}$	Suppressor diode	PUR	BK		VAA22-24.3-L/S370	8055654	8055655	8055656
		30 $\text{V}_{\text{AC/DC}}$	Suppressor diode	PVC	GY		VAA22-24.3-L/P00	8055679	8055680	8055678
		30 $\text{V}_{\text{AC/DC}}$	Suppressor diode	PVC	GY		VAA22-24.3-L/P01	8055701	8055702	8055703
		30 $\text{V}_{\text{AC/DC}}$	without	PUR	BK		VAA22-24.1-L/S370	8055648	8055649	8055650
		30 $\text{V}_{\text{AC/DC}}$	without	PVC	GY		VAA22-24.1-L/P00	8055672	8055673	8055674
		30 $\text{V}_{\text{AC/DC}}$	without	PVC	GY		VAA22-24.1-L/P01	8055696	8055697	8055698
		3+PE wire	30 $\text{V}_{\text{DC}}$	without	PUR	BK		VAA41-24.2-L/S370	8055660	8055661
30 $\text{V}_{\text{DC}}$	without		PVC	GY		VAA41-24.2-L/P00	8055685	8055686	8055684	
30 $\text{V}_{\text{DC}}$	without		PVC	GY		VAA41-24.2-L/P01	8055707	8055708	8055709	
	2+PE	230 $\text{V}_{\text{AC/DC}}$	without	PUR	BK		VAAG21-230.0-L/S370	8055723	8055724	8055725
		230 $\text{V}_{\text{AC/DC}}$	without	PVC	GY		VAAG21-230.0-L/P00	8055729	8055730	8055731
		230 $\text{V}_{\text{AC/DC}}$	without	PVC	GY		VAAG21-230.0-L/P01	8055735	8055736	8055737
	2+PE, PE bridged	230 $\text{V}_{\text{AC/DC}}$	Varistor	PUR	BK		VAAG22-230.5-L/S370	8055668	8055669	8055670
		230 $\text{V}_{\text{AC/DC}}$	Varistor	PVC	GY		VAAG22-230.5-L/P00	8055693	8055694	8055695
		230 $\text{V}_{\text{AC/DC}}$	Varistor	PVC	GY		VAAG22-230.5-L/P01	8055715	8055716	8055717
		30 $\text{V}_{\text{AC/DC}}$	Suppressor diode	PUR	BK		VAAG22-24.3-L/S370	8055657	8055658	8055659
		30 $\text{V}_{\text{AC/DC}}$	Suppressor diode	PVC	GY		VAAG22-24.3-L/P00	8055682	8055683	8055681
		30 $\text{V}_{\text{AC/DC}}$	Suppressor diode	PVC	GY		VAAG22-24.3-L/P01	8055704	8055705	8055706
		30 $\text{V}_{\text{AC/DC}}$	without	PUR	BK		VAAG22-24.1-L/S370	8055651	8055652	8055653
3+PE wire	30 $\text{V}_{\text{DC}}$	without	PUR	BK		VAAG41-24.2-L/S370	8055663	8055664	8055665	
	30 $\text{V}_{\text{DC}}$	without	PVC	GY		VAAG41-24.2-L/P00	8055688	8055689	8055687	
	30 $\text{V}_{\text{DC}}$	without	PVC	GY		VAAG41-24.2-L/P01	8055719	8055710	8055711	
 	2+PE, PE bridged	24 $\text{V}_{\text{AC/DC}}$	Suppressor diode	PUR	BK	0.15	VA22-24.3-0,15-DA22-24.3-L/S370	8055743	8055744	8055745
		24 $\text{V}_{\text{AC/DC}}$	Suppressor diode	PUR	BK	0.40	VA22-24.3-0,4-DA22-24.3-L/S370	8055746	8055747	8055748
		24 $\text{V}_{\text{AC/DC}}$	Suppressor diode	PVC	GY	0.15	VA22-24.3-0,15-DA22-24.3-L/P00	8055749	8055750	8055751
		24 $\text{V}_{\text{AC/DC}}$	Suppressor diode	PVC	GY	0.15	VA22-24.3-0,15-DA22-24.3-L/P01	8055755	8055756	8055757
		24 $\text{V}_{\text{AC/DC}}$	Suppressor diode	PVC	GY	0.40	VA22-24.3-0,4-DA22-24.3-L/P00	8055752	8055753	8055754
		24 $\text{V}_{\text{AC/DC}}$	Suppressor diode	PVC	GY	0.40	VA22-24.3-0,4-DA22-24.3-L/P01	8055758	8055759	8055760








\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

	Pins	Body		Cable			Item description	L / L2 = cable length		
		U[ <i>max</i> ]	Circuit	Material	Color	L1[m]		2m / 1m	5m / 2m	10m / 5m
	2+PE, PE bridged	24V <sub>AC/DC</sub>	Suppressor diode	PUR	BK	0.15	VA22-24.3-0,15-DA22-24.3-WAS5.132/S370	8055761		
		24V <sub>AC/DC</sub>	Suppressor diode	PUR	BK	0.40	VA22-24.3-0,4-DA22-24.3-WAS5.132/S370	8055762		
		24V <sub>AC/DC</sub>	Suppressor diode	PVC	GY	0.15	VA22-24.3-0,15-DA22-24.3-WAS5.132/P00	8055763		
		24V <sub>AC/DC</sub>	Suppressor diode	PVC	GY	0.15	VA22-24.3-0,15-DA22-24.3-WAS5.132/P01	8055765		
		24V <sub>AC/DC</sub>	Suppressor diode	PVC	GY	0.40	VA22-24.3-0,4-DA22-24.3-WAS5.132/P00	8055764		
		24V <sub>AC/DC</sub>	Suppressor diode	PVC	GY	0.40	VA22-24.3-0,4-DA22-24.3-WAS5.132/P01	8055766		
	2+PE	230V <sub>AC/DC</sub>	Varistor	PUR	BK		VB21-230.5-L/S370	8050762	8047810	8050763
		230V <sub>AC/DC</sub>	Varistor	PVC	GY		VB21-230.5-L/P00	8050835	8049312	8050836
		230V <sub>AC/DC</sub>	Varistor	PVC	GY		VB21-230.5-L/P01	8050883	8047828	8050884
		230V <sub>AC/DC</sub>	without	PUR	BK		VB21-230.0-L/S370	8050760	8047809	8050761
		230V <sub>AC/DC</sub>	without	PVC	GY		VB21-230.0-L/P00	8048842	8048843	8050834
		230V <sub>AC/DC</sub>	without	PVC	GY		VB21-230.0-L/P01	8050881	8047827	8050882
		30V <sub>AC/DC</sub>	Suppressor diode	PUR	BK		VB21-24.3-L/S370	8050758	8047808	8050759
		30V <sub>AC/DC</sub>	Suppressor diode	PVC	GY		VB21-24.3-L/P00	8048844	8048845	8050832
		30V <sub>AC/DC</sub>	Suppressor diode	PVC	GY		VB21-24.3-L/P01	8050879	8047826	8050880
		30V <sub>AC/DC</sub>	without	PUR	BK		VB21-24.1-L/S370	8049246	8047807	8050757
		30V <sub>AC/DC</sub>	without	PVC	GY		VB21-24.1-L/P00	8050829	8049311	8050830
		30V <sub>AC/DC</sub>	without	PVC	GY		VB21-24.1-L/P01	8050877	8047825	8050878
	2+PE	230V <sub>AC/DC</sub>	Varistor	PUR	BK		VB121-230.5-L/S370	8050767	8047814	8050768
		230V <sub>AC/DC</sub>	Varistor	PVC	GY		VB121-230.5-L/P00	8050859	8048821	8050860
		230V <sub>AC/DC</sub>	Varistor	PVC	GY		VB121-230.5-L/P01	8050906	8047832	8050907
		230V <sub>AC/DC</sub>	without	PUR	BK		VB121-230.0-L/S370	8050766	8047813	8049931
		230V <sub>AC/DC</sub>	without	PVC	GY		VB121-230.0-L/P00	8050857	8049314	8050858
		230V <sub>AC/DC</sub>	without	PVC	GY		VB121-230.0-L/P01	8050904	8047831	8050905
		30V <sub>AC/DC</sub>	Suppressor diode	PUR	BK		VB121-24.3-L/S370	8049884	8047812	8050765
		30V <sub>AC/DC</sub>	Suppressor diode	PVC	GY		VB121-24.3-L/P00	8050855	8048820	8050856
		30V <sub>AC/DC</sub>	Suppressor diode	PVC	GY		VB121-24.3-L/P01	8050901	8047830	8050902
		30V <sub>AC/DC</sub>	without	PUR	BK		VB121-24.1-L/S370	8050764	8047811	8050539
		30V <sub>AC/DC</sub>	without	PVC	GY		VB121-24.1-L/P00	8050838	8049313	8050538
		30V <sub>AC/DC</sub>	without	PVC	GY		VB121-24.1-L/P01	8050899	8047829	8050900
	2+PE	230V <sub>AC/DC</sub>	without	PUR	BK		VC21-230.0-L/S370	8050772	8047817	8050773
		230V <sub>AC/DC</sub>	without	PVC	GY		VC21-230.0-L/P00	8050846	8049317	8050848
		230V <sub>AC/DC</sub>	without	PVC	GY		VC21-230.0-L/P01	8050914	8047835	8050916

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.




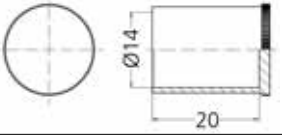



		Pins	Body		Cable			Item description	L /L2 = cable length				
			U[ $\text{max}$ ]	Circuit	Material	Color	L1[m]		2m / 1m	5m / 2m	10m / 5m		
	Single-ended cordset female, angled, Valve C	2+PE, PE bridged	30V <sub>AC/DC</sub>	without	PUR	BK		VC22-24.1-L/S370	8050769	8047815	8050770		
			30V <sub>AC/DC</sub>	without	PVC	GY		VC22-24.1-L/P00	8050842	8049315	8050843		
			30V <sub>AC/DC</sub>	without	PVC	GY		VC22-24.1-L/P01	8050909	8047833	8050910		
			30V <sub>AC/DC</sub>	Z-diode	PUR	BK		VC22-24.4-L/S370	8049873	8047816	8050771		
			30V <sub>AC/DC</sub>	Z-diode	PVC	GY		VC22-24.4-L/P00	8050844	8049316	8050845		
			30V <sub>AC/DC</sub>	Z-diode	PVC	GY		VC22-24.4-L/P01	8050912	8047834	8050913		
	Single-ended cordset female, angled, Valve CI	2+PE	230V <sub>AC/DC</sub>	without	PUR	BK		VCI21-230.0-L/S370	8050778	8047820	8050779		
			230V <sub>AC/DC</sub>	without	PVC	GY		VCI21-230.0-L/P00	8050853	8049320	8050854		
			230V <sub>AC/DC</sub>	without	PVC	GY		VCI21-230.0-L/P01	8050921	8047838	8050922		
		2+PE, PE bridged	30V <sub>AC/DC</sub>	without	PUR	BK		VCI22-24.1-L/S370	8050774	8047818	8050775		
			30V <sub>AC/DC</sub>	without	PVC	GY		VCI22-24.1-L/P00	8050849	8049318	8050850		
			30V <sub>AC/DC</sub>	without	PVC	GY		VCI22-24.1-L/P01	8050917	8047836	8050918		
			30V <sub>AC/DC</sub>	Z-diode	PUR	BK		VCI22-24.4-L/S370	8050776	8047819	8050777		
			30V <sub>AC/DC</sub>	Z-diode	PVC	GY		VCI22-24.4-L/P00	8050851	8049319	8050852		
			30V <sub>AC/DC</sub>	Z-diode	PVC	GY		VCI22-24.4-L/P01	8050919	8047837	8050920		
				Double-ended cordset female, angled, Valve A male, straight, M12	2+PE, PE bridged	30V <sub>AC/DC</sub>	Suppressor diode	PUR	BK		VA22-24.3-L-AL-WAS5.002/S370	8052049	8050782
30V <sub>AC/DC</sub>	Suppressor diode	PVC				GY		VA22-24.3-L-AL-WAS5.002/P00	8052209	8052225	8052226		
30V <sub>AC/DC</sub>	Suppressor diode	PVC				GY		VA22-24.3-L-AL-WAS5.002/P01	8052260	8052261	8052262		
3+PE wire	30V <sub>AC/DC</sub>	without			PUR	BK		VA41-24.2-L-AL-WAS5/S370	8052051	8050785	8050786		
	30V <sub>AC/DC</sub>	without			PVC	GY		VA41-24.2-L-AL-WAS5/P00	8052230	8052231	8052232		
	30V <sub>AC/DC</sub>	without			PVC	GY		VA41-24.2-L-AL-WAS5/P01	8052266	8052267	8052268		
	Double-ended cordset female, angled, Valve A male, angled, M12	2+PE, PE bridged	30V <sub>AC/DC</sub>	Suppressor diode	PUR	BK		VA22-24.3-L-AL-WWAS5.002/S370	8052050	8050780	8050186		
			30V <sub>AC/DC</sub>	Suppressor diode	PVC	GY		VA22-24.3-L-AL-WWAS5.002/P00	8052227	8052228	8052229		
			30V <sub>AC/DC</sub>	Suppressor diode	PVC	GY		VA22-24.3-L-AL-WWAS5.002/P01	8052263	8052264	8052265		
		3+PE wire	30V <sub>AC/DC</sub>	without	PUR	BK		VA41-24.2-L-AL-WWAS5/S370	8052052	8050788	8050188		
			30V <sub>AC/DC</sub>	without	PVC	GY		VA41-24.2-L-AL-WWAS5/P00	8052233	8052234	8052235		
			30V <sub>AC/DC</sub>	without	PVC	GY		VA41-24.2-L-AL-WWAS5/P01	8052269	8052270	8052271		
			Double-ended cordset female, angled, Valve B male, straight, M12	2+PE	30V <sub>AC/DC</sub>	Suppressor diode	PUR	BK		VB21-24.3-L-AL-WAS5.002/S370	8052053	8050790	8050791
					30V <sub>AC/DC</sub>	Suppressor diode	PVC	GY		VB21-24.3-L-AL-WAS5.002/P00	8052236	8052237	8052238
					30V <sub>AC/DC</sub>	Suppressor diode	PVC	GY		VB21-24.3-L-AL-WAS5.002/P01	8052272	8052273	8052274
	Double-ended cordset female, angled, Valve B male, angled, M12	2+PE	30V <sub>AC/DC</sub>	Suppressor diode	PUR	BK		VB21-24.3-L-AL-WWAS5.002/S370	8052054	8050797	8050189		
			30V <sub>AC/DC</sub>	Suppressor diode	PVC	GY		VB21-24.3-L-AL-WWAS5.002/P00	8052239	8052240	8052241		
			30V <sub>AC/DC</sub>	Suppressor diode	PVC	GY		VB21-24.3-L-AL-WWAS5.002/P01	8052275	8052276	8052277		

\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.


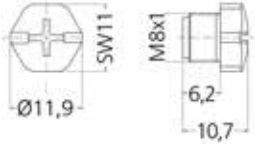



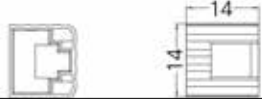

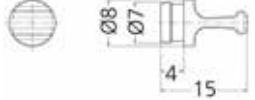

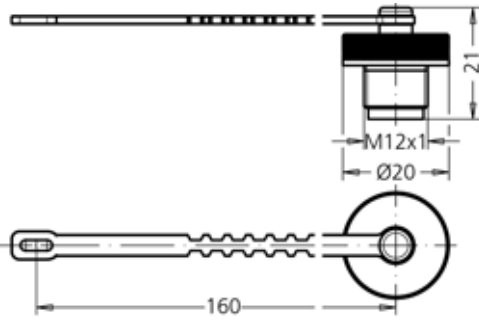

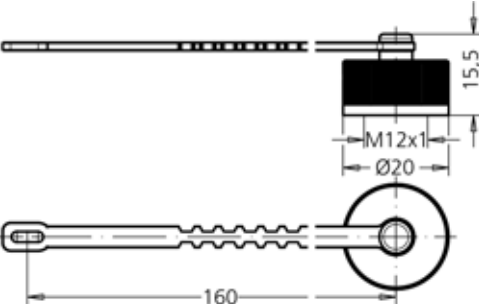
		Pins	Body		Cable			Item description	L /L2 = cable length					
			U[max]	Circuit	Material	Color	L1[m]		2m / 1m	5m / 2m	10m / 5m			
	Double-ended cordset female, angled, Valve BI male, straight, M12	2+PE	30V <sub>AC/DC</sub>	Suppressor diode	PUR	BK	VBI21-24.3-L-AL-WAS5.002/S370	8049278	8050800	8050801				
			30V <sub>AC/DC</sub>	Suppressor diode	PVC	GY					VBI21-24.3-L-AL-WAS5.002/P00	8052242	8052243	8052244
			30V <sub>AC/DC</sub>	Suppressor diode	PVC	GY					VBI21-24.3-L-AL-WAS5.002/P01	8052278	8052279	8052280
	Double-ended cordset female, angled, Valve BI male, angled, M12	2+PE	30V <sub>AC/DC</sub>	Suppressor diode	PUR	BK	VBI21-24.3-L-AL-WWAS5.002/S370	8049279	8050804	8050805				
			30V <sub>AC/DC</sub>	Suppressor diode	PVC	GY					VBI21-24.3-L-AL-WWAS5.002/P00	8052245	8052246	8052247
			30V <sub>AC/DC</sub>	Suppressor diode	PVC	GY					VBI21-24.3-L-AL-WWAS5.002/P01	8052281	8052282	8052283
	Double-ended cordset female, angled, Valve C male, straight, M12	2+PE, PE bridged	30V <sub>AC/DC</sub>	Z-diode	PUR	BK	VC22-24.4-L-AL-WAS5.002/S370	8052055	8050807	8050190				
			30V <sub>AC/DC</sub>	Z-diode	PVC	GY					VC22-24.4-L-AL-WAS5.002/P00	8052248	8052249	8052250
			30V <sub>AC/DC</sub>	Z-diode	PVC	GY					VC22-24.4-L-AL-WAS5.002/P01	8052284	8052285	8052286
	Double-ended cordset female, angled, Valve C male, angled, M12	2+PE, PE bridged	30V <sub>AC/DC</sub>	Z-diode	PUR	BK	VC22-24.4-L-AL-WWAS5.002/S370	8052056	8050813	8050191				
			30V <sub>AC/DC</sub>	Z-diode	PVC	GY					VC22-24.4-L-AL-WWAS5.002/P00	8052251	8052252	8052253
			30V <sub>AC/DC</sub>	Z-diode	PVC	GY					VC22-24.4-L-AL-WWAS5.002/P01	8052287	8052288	8052289
	Double-ended cordset female, angled, Valve CI male, straight, M12	2+PE, PE bridged	30V <sub>AC/DC</sub>	Z-diode	PUR	BK	VCI22-24.4-L-AL-WAS5.002/S370	8052057	8050810	8050192				
			30V <sub>AC/DC</sub>	Z-diode	PVC	GY					VCI22-24.4-L-AL-WAS5.002/P00	8052254	8052255	8052256
			30V <sub>AC/DC</sub>	Z-diode	PVC	GY					VCI22-24.4-L-AL-WAS5.002/P01	8052290	8052291	8052292
	Double-ended cordset female, angled, Valve CI male, angled, M12	2+PE, PE bridged	30V <sub>AC/DC</sub>	Z-diode	PUR	BK	VCI22-24.4-L-AL-WWAS5.002/S370	8052058	8050816	8050193				
			30V <sub>AC/DC</sub>	Z-diode	PVC	GY					VCI22-24.4-L-AL-WWAS5.002/P00	8052257	8052258	8052259
			30V <sub>AC/DC</sub>	Z-diode	PVC	GY					VCI22-24.4-L-AL-WWAS5.002/P01	8052293	8052294	8052296
	Adapter male, angled, Valve A Connecting plug M12x1, 5 poles	2+PE, PE bridged	24V <sub>AC/DC</sub>	Suppressor diode			VA22-24.3-WAS5.002	8055768						
			24V <sub>AC/DC</sub>	without			VA22-24.1-WAS5.002	8055767						
			24V <sub>DC</sub>	without			VA41-24.2-WAS5	8055769						
			60V <sub>AC/DC</sub>	without			VA22-60.0-WAS5.002	8055770						


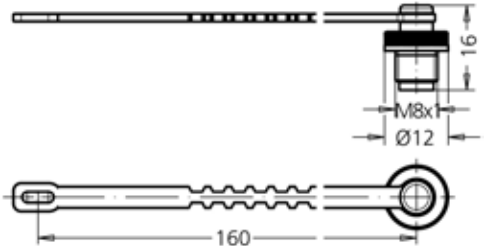

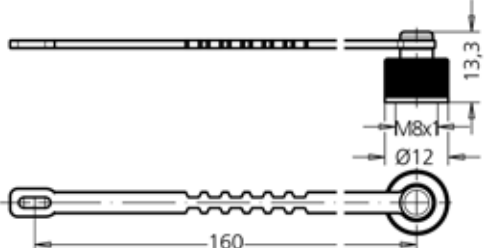

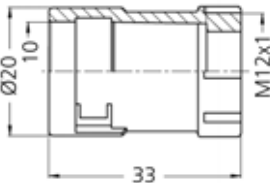


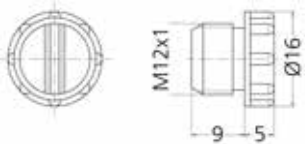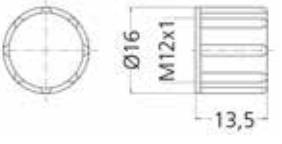

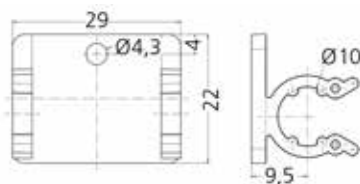
\* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.















				Packaging unit   Item-No.				
				Material   Color	1	10	100	500
		Screw plug cover for M12 female		BK, similar RAL9005			8081767	8081768
				VT, similar RAL4001			8081773	8081774
				BU, similar RAL5012			8081775	8081776
				GN, similar RAL6018			8081777	8081778
		Screw cap cover for M12 male		YE, similar RAL1021			8081751	8081752
				BK, similar RAL9005			8081753	8081754
				GY, similar RAL7035			8081755	8081756
				VT, similar RAL4001			8081757	8081758
				BU, similar RAL5012			8081759	8081760
		Dustproof-cap cover for M12 female male		BK, similar RAL9005			8081763	8081764
		Dustproof-cap cover for M12 male		transparent			8081749	8081750
		Dustproof-cap cover for Ø8mm snap female male		TPE   YE, similar RAL1018			8081765	8081766

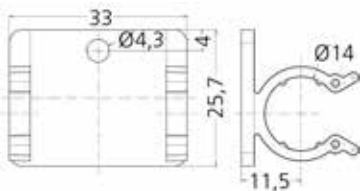














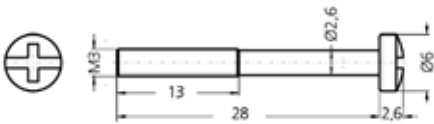














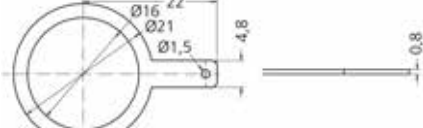

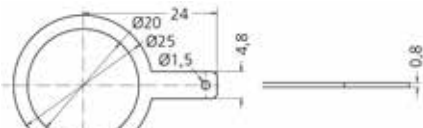
				Packaging unit   Item-No.				
				Material   Color	1	10	100	500
		Screw plug cover for M8 female	BK, similar RAL9005				8081771	8081772
		Screw cap cover for M8 male	BK, similar RAL9005				8081761	8081762
		Dustproof-cap cover for RJ45	Plastic   transparent	8064715				
		Screw plug cover for Ø 8mm snap female	BK, similar RAL9005				8081769	8081770
		Screw plug captiv cover for M12 female	BK, similar RAL9005	8048568				
		Screw cap captiv cover for M12 male	BK, similar RAL9005	8048569				


				Packaging unit   Item-No.				
				Material   Color	1	5	10	100
		Screw plug captiv cover for M8 female	BK, similar RAL9005	8048567				
		Screw cap captiv cover for M8 male		8048566				
		Adapter piece   M12	BK, similar RAL9005	8081747				
		Protective hose 50m	BK, similar RAL9005	8081621				
		Mounting-clip   M12   1 clip	POM	8047660				
		Mounting-set   M12   Clips + screws M4x8	POM	8047664				
		Mounting-clip   M8   1 clip	POM	8047658				
		Mounting-set   M8   Clips + screws M4x8	POM	8047663				

				Packaging unit   Item-No.				
				Material   Color	1	10	100	500
		<p>Mounting-set   S89   2x carrier plates + 4x screws M4x25 + 4x nuts M4</p>	<p>PA, BK</p>	<p>8036078</p>				
		<p>Wall bracket for Industrial Ethernet adapter For Item-No. 8065952, 8065950 and 8065951</p>	<p>Plastic</p>	<p>8065953</p>				
		<p>Safety-clip   M12 against accidental disconnection under pressure</p>	<p>PA, BK   BK, similar RAL9005</p>	<p>8040501</p>				
		<p>Safety-clip   M8   against accidental disconnection under pressure</p>	<p>PA, BK   BK, similar RAL9005</p>	<p>8040691</p>				

				Packaging unit   Item-No.				
				Material   Color	1	10	100	500
		Labels   I/O-junction passive   I/O-junction logic M8						8011349
		Labels   I/O-junction passive   M12		WH, similar RAL9002				8015002
		Accessories set   I/O-junction   M8   10 x Labels, 2 x Screw plug 8015075 M8						8087214
		Accessories set   I/O-junction passive   M12   10 x Labels, 2 x Screw plug 8000004						8087215
		Labels   Valve connector AA,B,BI,C,CI		WH, similar RAL9002				8047109
		Labels   Valve connector A		WH, similar RAL9002				8047110
		Label-carrier Ø 3,5...6,0 mm		PVC				8000052
		Label-carrier Ø 6,0....10,0 mm		PVC				8000060


				Packaging unit   Item-No.				
				Material   Color	1	10	100	500
		Label-carrier Ø 3,5...6,0 mm		thermoplastical ESC (halogen-free)	8000091			
		Label-carrier Ø 6,0...9,0 mm		thermoplastical ESC (halogen-free)	8000092			
		Cable stripper for longitudinal cut of sheathing of PUR-coated cables.			8066217			
		Cable Stripping Tool   Cable Stripping Tool for PUR halogen-free-, highly flexible TPE-U-, PUR-, PUR /PVC-, PVC, shielded and unshielded cables, multi-stranded. 4,40 – 7,00mm			8066215			
		Cable Stripping Tool   Cable Stripping Tool for PUR halogen-free-, highly flexible TPE-U-, PUR-, PUR /PVC-, PVC, shielded and unshielded cables, multi-stranded. 3,20 – 4,40mm			8066216			
		Fixing screw   Stainless-steel screw, for valve connectors type A, B, BI		V4A	8060907			
		Spare nuts for receptacle For Receptacle M8   PFKS, PFS A/F10		Metal, CuZn, nickel-plated	8004923			
		Spare nuts for receptacle For Receptacle M8   PFSF A/F10		Metal, CuZn, nickel-plated	8004971			
		Spare nuts for receptacle For Receptacle M12   FSF A/F16		Metal, CuZn, nickel-plated	8004930			

						Packaging unit   Item-No.				
						Material   Color	1	10	100	500
		Spare nuts for receptacle For Receptacle M12   FKD, FSD PG9 A/F17		Metal, CuZn, nickel-plated		8004874				
		Spare nuts for receptacle For Receptacle M12   FKD, FSD M16 A/F17		Metal, CuZn, nickel-plated		8027491				
		Spare nuts for receptacle For Receptacle M12   PG9 A/F18		Metal, CuZn, nickel-plated		8004913				
		Spare nuts for receptacle For Receptacle M12   M16x1,5 A/F19		Metal, CuZn, nickel-plated		8029359				
		Spare nuts for receptacle For Receptacle M12   FKD, FSD, M20 A/F22		Metal, CuZn, nickel-plated		8027492				
		Spare nuts for receptacle For Receptacle M12   M20x1,5 A/F24		Metal, CuZn, nickel-plated		8029360				
		Sealing   Field-wireable connector   M12		BK, similar RAL9005		8061922				
		Solder tags   M16x1.5   for grounding of receptacle housings		Metal, CuZn, nickel-plated		8036043				
		Solder tags   M20x1.5   for grounding of receptacle housings		Metal, CuZn, nickel-plated		8036044				

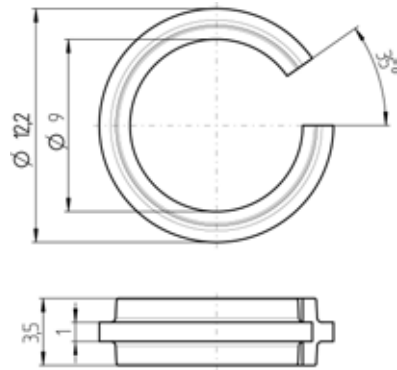

Marking rings Ø 9mm | for color-coded cables and connectors (M12, M12 shielded, RJ45, overmolded Receptacle connector with cable: FKFD5Y, M8 shielded)


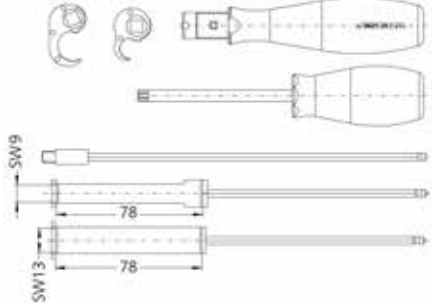

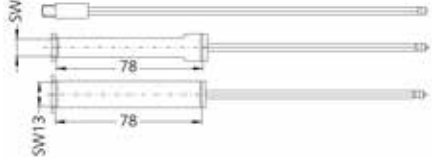


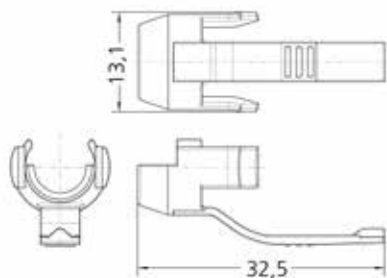Material   Color	Packaging unit   Item-No.			
	1	10	100	500
POM   WH, similar RAL9002			8063523	
POM   RD, similar RAL3020			8063524	
POM   BU, similar RAL5012			8063525	
POM   YE, similar RAL1018			8063526	
POM   GN, similar RAL6018			8063527	
POM   BK, similar RAL9004			8063528	
POM   OG, similar RAL2008			8063529	
POM   VT, similar RAL4006			8063530	
POM   GY, similar RAL7035			8063531	
POM   PK, similar RAL4003			8063532	
POM   similar RAL1002			8063533	



Unlocking clip for RJ45

Material   Color	Packaging unit   Item-No.			
	1	10	100	500
POM   RD, similar RAL3020		8071939		
POM   OG, similar RAL2008		8071944		
POM   Y E, similar RAL1018		8071941		
POM   similar RAL1002		8071948		
POM   GN, similar RAL6018		8071942		
POM   BU, similar RAL5012		8071940		
POM   VT, similar RAL4006		8071945		
POM   PK, similar RAL4003		8071947		
POM   GY, similar RAL7035		8071946		
POM   WH, similar RAL9002		8071938		
POM   BK, similar RAL9004		8071943		



				Packaging unit   Item-No.				
				Material   Color	1	10	100	500
		<p>Torque-wrench set   Torque-wrench-set in wallet fully fitted for M8, M12 (knurl, hexagon-nut)</p>	<p>8055431</p>					
								
		<p>Food &amp; Beverage   Adapter   Adapter A/F14 for Food&amp;Beverage Hygienic M12 (single)w</p>	<p>8063392</p>					



P00	P01®	P01BK®	S370®	S370GY®	S7400® robotic	S570®	S400® easystrip		
PVC	PVC	PVC	PUR, halogen-free	PUR, halogen-free	PUR, halogen-free	PUR, halogen-free	PUR, halogen-free		Jacket
PVC	PVC	PVC	PP, halogen-free	PP, halogen-free	PP, halogen-free	PP, halogen-free	PP, halogen-free		Insulation
RAL 7040	RAL 7040	RAL 9005	RAL 9005	RAL 7040	RAL 2003	RAL 9005	RAL 9005		Color outer-jacket (similar)
★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★		Machinery-, equipment manufacturing
★★	★★	★★	★★★★	★★★★	★★★★	★★★★	★★★★		Automotive industry
★	★	★	★★★★	★★★★	★★★★	★★★★	★★★★		Robotics
★★★★	★★★★	★★★★	★	★	★	★	★		Food and beverage industry
★★★★	★★★★	★★★★	★	★	★	★	★		Packaging and filling systems
★★	★★	★★	★★	★★	★★	★★	★★		Building installations
★★	★★	★★	★★★★	★★★★	★★★★	★★★★	★★★★		Wind power plants
★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★		Flame retardant
★★	★★	★★	★★★★	★★★★	★★★★	★★★★	★★★★		Oil resistance
★	★	★	★★★★	★★★★	★★★★	★★★★	★★★★		Weldfield immunity
★	★	★	★★★★	★★★★	★★★★	★★★★	★★★★		Drag-chain capability
			★★★	★★★	★★★★	★★★	★★★★		Torsion capability
★	★	★	★	★	★	★	★		Acids- and alkali resistance
★★	★★	★★	★★	★★	★★	★★	★★		Seawater-resistant
★	★	★	★★★★	★★★★	★★★★	★★★★	★★★★		Ozone- and UV-resistance
★★	★★	★★	★★	★★	★★	★★	★★		Hydrolysis strength
★★	★★	★★	★★	★★	★★	★★	★★		Microbes strength
≤300V	≤300V	≤300V	≤300V	≤300V	≤300V	≤300V	≤300V		Rated voltage
10xØ	10xØ	10xØ	10xØ	10xØ	10xØ	10xØ	10xØ		Bending strength (repeated)
5xØ	5xØ	5xØ	5xØ	5xØ	5xØ	5xØ	5xØ		Bending strength (single)
0°C...+80°C	0°C...+80°C	0°C...+80°C	-30°C...+90°C	-30°C...+90°C	-30°C...+90°C	-30°C...+90°C	-30°C...+90°C		Temperature range (repeated)
-25°C...+80°C	-25°C...+80°C	-25°C...+80°C	-40°C...+90°C	-40°C...+90°C	-40°C...+90°C	-40°C...+90°C	-40°C...+90°C		Temperature range (single)
optional	optional	optional	optional	optional	no	no	no		Shielding
✓	✓	✓	✓	✓	✓	✓	✓		ROHS
	✓	✓	✓	✓	✓	✓	✓		UL and/or CSA
✓	✓	✓	✓	✓	✓	✓	✓		GOST
✓	✓	✓							ECOLAB
AL   FB   V	AL   FB   V	AL   V	AL   V	AL   V	AL	AL	AL		ESCHA Product line




S3930	S2430	Cat5e   S2171®	Cat5e   S5058®	Cat5e   S5059®		
TPE, halogen-free	PTFE(5Y)	outside PUR11Y, inside FRNC	outside PUR11Y, inside FRNC	outside PUR11Y, inside FRNC	Jacket	Materials
TPE, halogen-free	PTFE(5Y)	PE2Y, halogen-free	PE2Y, halogen-free	PE2Y, halogen-free	Insulation	
RAL 7035	RAL 9003	RAL 6018	BK, with red vertical stripe	BK, with red vertical stripe	Color outer-jacket (similar)	
★	★	★★★★	★★★★	★★★★	Machinery-, equipment manufacturing	Applications
★★★★	★★	★★★★	★★★★	★★★★	Automotive industry	
★★★★	★★	★★	★	★	Robotics	
★★★★	★★	★	★	★	Food and beverage industry	
★★★★	★★	★	★	★	Packaging and filling systems	
★★	★★	★★★★	★★★★	★★★★	Building installations	
★★	★★★★	★★★★	★★★★	★★★★	Wind power plants	Resistance
★★★★	★★★★	★★★★	★★★★	★★★★	Flame retardant	
★★	★★★★	★★★★	★★★★	★★★★	Oil resistance	
★	★★	★	★	★	Weldfield immunity	
★★	★★	★★★★	★★★★	★★★★	Drag-chain capability	
		★	★	★	Torsion capability	
★★★★	★★★★				Acids- and alkali resistance	
★★★★	★★★★	★★	★★	★★	Seawater-resistant	
	★★★★	★★	★★	★★	Ozone- and UV-resistance	
★★★★	★★★★	★★	★★	★★	Hydrolysis strength	
★★★★	★★★★	★★	★★	★★	Microbes strength	
≤250V <sub>Ac</sub>	≤250V	600V (UL rating)	300V (UL rating)	300V (UL rating)	Rated voltage	Features
10x∅	10x∅	8x∅	8x∅	15x∅	Bending strength (repeated)	
5x∅	5x∅	4x∅	6x∅	8x∅	Bending strength (single)	
-25°C...+105°C	n/s	-30°C...+70°C	-30°C...+70°C	-30°C...+70°C	Temperature range (repeated)	
-40°C...+105°C	-190°C...+260°C	-40°C...+75°C	-40°C...+80°C	-40°C...+80°C	Temperature range (single)	
no	optional	yes	yes	yes	Shielding	Certifications
✓	✓	✓	✓	✓	ROHS	
		✓	✓	✓	UL and/or CSA	
✓	✓	✓	✓	✓	GOST	
✓					ECOLAB	
FB	HT	IE   Profinet	IE   EtherCAT P	IE   EtherCAT P	ESCHA Product line	








Cat5   S3400®	Cat5e   S5100®	Cat5e   S3800®	Cat7   S3500®	Cat7   S4030®	Cat6   S4031®		
PUR, F45052-F5100	PUR	outside PUR11Y, inside FRNC	PUR11Y	PUR	PUR		Jacket
PP	PE	PE2Y, halogen-free	PE02Y, foamed	Foam-Skin Polyolefin	Foam-Skin Polyolefin		Insulation
RAL6018	RAL6018	RAL3020	RAL6018	RAL6018	RAL6018		Color outer-jacket (similar)
★	★★★★	★	★	★★	★★		Machinery-, equipment manufacturing
★★★★	★★★★	★★★★	★★★★	★★★★	★★★★		Automotive industry
★★	★★★★	★★	★★	★★★	★★★		Robotics
★	★	★	★	★	★		Food and beverage industry
★	★	★	★	★	★		Packaging and filling systems
★★★★	★★★★	★★★★	★★★★	★★	★★		Building installations
★★★★	★★★★	★★★★	★★★★	★★★★	★★★★		Wind power plants
★★	★★★★	★★★★	★★★★	★★★★	★★★★		Flame retardant
★★★★	★★★★	★★★★	★★★★	★★★★	★★★★		Oil resistance
★	★	★	★	★	★		Weldfield immunity
★★★★	★★★★	★★★★	★★★★	★	★★★★		Drag-chain capability
★	★★★★	★	★	★★★★	★		Torsion capability
							Acids- and alkali resistance
★★	★★	★★	★★	★★	★★		Seawater-resistant
★★	★★	★★	★★	★★	★★		Ozone- and UV-resistance
★★	★★	★★	★★	★★	★★		Hydrolysis strength
★★	★★	★★	★★	★★	★★		Microbes strength
30V (UL rating)	600V (UL rating)	600V (UL rating)	30V (UL rating)	125V	100V		Rated voltage
7.5xØ	10xØ	8xØ	10xØ	15xØ	7.5xØ		Bending strength (repeated)
4xØ	5xØ	4xØ	5xØ	8xØ	4xØ		Bending strength (single)
-40°C...+80°C	-20°C...+80°C	-40°C...+80°C	-40°C...+80°C	-30°C...+70°C	-30°C...+70°C		Temperature range (repeated)
-40°C...+80°C	-40°C...+80°C	-40°C...+80°C	-20°C...+60°C	-40°C...+80°C	-40°C...+80°C		Temperature range (single)
yes	yes	yes	yes	yes	yes		Shielding
✓	✓	✓	✓	✓	✓		ROHS
✓	✓	✓	✓	✓	✓		UL and/or CSA
✓	✓	✓	✓	✓	✓		GOST
							ECOLAB
IE   EtherCAT	Industrial Ethernet	IE   Sercos®	Industrial Ethernet	Industrial Ethernet	Industrial Ethernet		ESCHA Product line

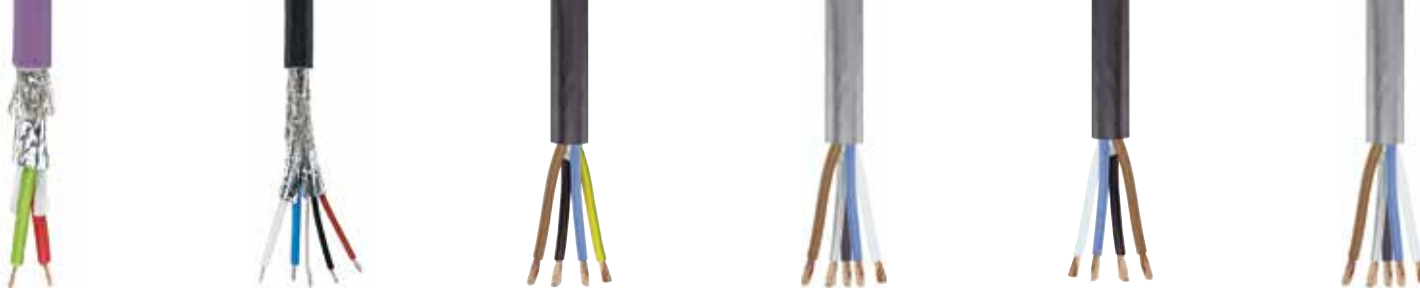Cable qualities



S1800®	S2800®	S5015®	S5015GY®	S5025®	S5025GY®		
PUR	PUR	PUR, halogen-free	PUR, halogen-free	PUR, halogen-free	PUR, halogen-free	Jacket	Materials
PE, foamed	Signal: PE, Power: PP	PP, halogen-free	PP, halogen-free	PP, halogen-free	PP, halogen-free	Insulation	
RAL4001	RAL9005	RAL9005	RAL7040	RAL9005	RAL7040	Color outer-jacket (similar)	
★★	★★	★★★★	★★★★	★★★★	★★★★	Machinery-, equipment manufacturing	Applications
★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	Automotive industry	
★★	★★	★	★	★	★	Robotics	
★	★	★	★	★	★	Food and beverage industry	
★	★	★	★	★	★	Packaging and filling systems	
★★★★	★★★★	★★	★★	★★	★★	Building installations	Resistance
★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	Wind power plants	
★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	Flame retardant	
★★	★★	★★★★	★★★★	★★★★	★★★★	Oil resistance	Features
★	★	★★★★	★★★★	★★★★	★★★★	Weldfield immunity	
★★	★★★	★★★★	★★★★	★★★★	★★★★	Drag-chain capability	
★	★	★	★	★	★	Torsion capability	
		★★	★★	★★	★★	Acids- and alkali resistance	
★★	★★	★★	★★	★★	★★	Seawater-resistant	
★★	★★★★	★★★★	★★★★	★★★★	★★★★	Ozone- and UV-resistance	
★★	★★	★★	★★	★★	★★	Hydrolysis strength	
★★	★★	★★	★★	★★	★★	Microbes strength	
300V	≤300V	VDE U <sub>0</sub> /U: 600V/1.000V	VDE U <sub>0</sub> /U: 600V/1.000V	VDE U <sub>0</sub> /U: 600V/1.000V	VDE U <sub>0</sub> /U: 600V/1.000V	Rated voltage	
10x∅	10x∅	7.5x∅	7.5x∅	10x∅	10x∅	Bending strength (repeated)	
5x∅	5x∅	4 x∅	4 x∅	4 x∅	4 x∅	Bending strength (single)	
-25°C...+80°C	-25°C...+80°C	-40°C...+90°C	-40°C...+90°C	-40°C...+90°C	-40°C...+90°C	Temperature range (repeated)	
-50°C...+80°C	-50°C...+80°C	-50°C...+90°C	-50°C...+90°C	-50°C...+90°C	-50°C...+90°C	Temperature range (single)	
yes	yes	no	no	no	no	Shielding	
✓	✓	✓	✓	✓	✓	ROHS	Certifications
✓	✓	✓	✓	✓	✓	UL and/or CSA	
✓	✓	✓	✓	✓	✓	GOST	
						ECOLAB	
Profibus	CANopen/DeviceNet	POWER	POWER	POWER	POWER	ESCHA Product line	







	Wire	Wire color	Conductor structure	ø [mm]	Item description	L=100m
	3	BN, BU, BK	32 x 0.10 mm	4,60	LiF9Y11YFHF 3x0,25 mm <sup>2</sup>	8058484
	4	BN, WH, BU, BK	32 x 0.10 mm	4,80	LiF9YH-11YH 4x0,25 (32x0,10)	8069722
	3	BN, BU, BK	42 x 0.10 mm	4,80	LiF9Y11YFHF 3x0,34 mm <sup>2</sup>	8058485
	4	BN, WH, BU, BK	42 x 0.10 mm	5,20	LiF9Y11YFHF 4x0,34 mm <sup>2</sup>	8057309
	4+PE	BN, WH, BU, BK, GN/YE	42 x 0.10 mm	5,60	LiF9Y11YFHF 4x0,34+1x0,34 mm <sup>2</sup>	8058487
	3	BN, BU, BK	32 x 0.10 mm	4,00	LiF9YH-11YH 3x0,25	8058490
	4	BN, WH, BU, BK	32 x 0.10 mm	4,30	LiF9YH-11YH 4x0,25	8058491
	5	BN, WH, BU, BK, GY	32 x 0.10 mm	4,70	LiF9YH-11YH 5x0,25	8058492
	3	BN, BU, BK	42 x 0.10 mm	4,30	LiF9YH-11YH 3x0,34	8046603
	4	BN, WH, BU, BK	42 x 0.10 mm	4,70	LiF9YH-11YH 4x0,34	8045519
	4+PE	BN, WH, BU, BK, GN/YE	42 x 0.10 mm	5,20	LiF9YH-11YH 4x0,34+1x0,34	8048725
	5	BN, WH, BU, BK, GY	42 x 0.10 mm	5,20	LiF9YH-11YH 5x0,34	8047757
	8	WH, BN, GN, YE, GY, PK, BU, RD	32 x 0.10 mm	5,90	LiF9YH11YH 8x0,25	8055605
	12	BN, BU, WH, GN, PK, YE, BK, GY, RD, VT, GY/PK, RD/BU	18 x 0.10 mm	5,60	Li9YH11YH 12x0,14	8055606
	3	BN, BU, BK	32 x 0.10 mm	4,00	LiF9YH-11YH 3x0,25	8058493
	4	BN, WH, BU, BK	32 x 0.10 mm	4,30	LiF9YH-11YH 4x0,25 (32x0,10)	8079702
	3	BN, BU, BK	42 x 0.10 mm	4,30	LiF9YH-11YH 3x0,34	8058494
	4	BN, WH, BU, BK	42 x 0.10 mm	4,70	LiF9YH-11YH 4x0,34	8058495
	4+PE	BN, WH, BU, BK, GN/YE	42 x 0.10 mm	5,20	LiF9YH-11YH 4x0,34+1x0,34	8058496
	3	BN, BU, BK	42 x 0.10 mm	4,80	LiF9YC11YFHF 3x0,34	8058488
	4	BN, WH, BU, BK	42 x 0.10 mm	5,10	LiF9YC11YFHF 4x0,34	8047431
	5	BN, WH, BU, BK, GY	42 x 0.10 mm	5,60	LiF9YC11YFHF 5x0,34	8046513
	8	WH, BN, GN, YE, GY, PK, BU, RD	32 x 0.10 mm	6,30	LiF9YHC11YH 8x0,25	8048963
	12	BN, BU, WH, GN, PK, YE, BK, GY, RD, VT, GY/PK, RD/BU	18 x 0.10 mm	6,00	Li9YHC11YH 12x0,14	8058489
	3	BN, BU, BK	14 x 0.15 mm	4,00	LiYY-OB 3x0,25 (14x0,15)	8058513
	4	BN, WH, BU, BK	14 x 0.15 mm	4,20	LiYY-OB 4x0,25 (14x0,15)	8056855
	5	BN, WH, BU, BK, GY	14 x 0.15 mm	4,50	LiYY-OB 5x0,25 (14x0,15)	8058514
	3	BN, BU, BK	19 x 0.15 mm	4,20	LiYY-OB 3x0,34 (19x0,15)	8058515
	4	BN, WH, BU, BK	19 x 0.15 mm	4,50	LiYY-OB 4x0,34 (19x0,15)	8057030
	4+PE	BN, WH, BU, BK, GN/YE	19 x 0.15 mm	4,90	LiYY-JB 4x0,34+1x0,34 (19x0,15)	8058516
	5	BN, WH, BU, BK, GY	19 x 0.15 mm	4,90	LiYY-OB 5x0,34 (19x0,15)	8058517
	8	WH, BN, GN, YE, GY, PK, BU, RD	14 x 0.15 mm	5,70	LiYY-OB 8x0,25 (14x0,15)	8058519
	12	BN, BU, WH, GN, PK, YE, BK, GY, RD, VT, GY/PK, RD/BU	18 x 0.10 mm	6,10	LiYY-OB 12x0,14 (18x0,10)	8058520

	Wire	Wire color	Conductor structure	ø [mm]	Item description	L=100m
	3	BN, BU, BK	14 x 0.15 mm	4,60	LiYCY-OB 3x0,25 (14x0,15)	8058497
	4	BN, WH, BU, BK	14 x 0.15 mm	4,90	LiYCY-OB 4x0,25 (14x0,15)	8058498
	5	BN, WH, BU, BK, GY	14 x 0.15 mm	5,30	LiYCY-OB 5x0,25 (14x0,15)	8058504
	3	BN, BU, BK	19 x 0.15 mm	4,80	LiYCY-OB 3x0,34 (19x0,15)	8058502
	4	BN, WH, BU, BK	19 x 0.15 mm	5,10	LiYCY-OB 4x0,34 (19x0,15)	8058503
	5	BN, WH, BU, BK, GY	19 x 0.15 mm	5,50	LiYCY-OB 5x0,34 (19x0,15)	8058504
	8	WH, BN, GN, YE, GY, PK, BU, RD	14 x 0.15 mm	6,70	LiYCY-OB 8x0,25 (14x0,15)	8042487
	12	BN, BU, WH, GN, PK, YE, BK, GY, RD, VT, GY/PK, RD/BU	18 x 0.10 mm	6,60	LiYCY-OB 12x0,14 (18x0,10)	8058505
	3	BN, BU, BK	14 x 0.15 mm	4,30	LiYY-OB 3x 0,25	8058521
	4	BN, WH, BU, BK	14 x 0.15 mm	4,70	LiYY-OB 4x0,25	8058522
	3	BN, BU, BK	19 x 0.15 mm	4,60	LiYY-OB 3x0,34mm <sup>2</sup>	8058523
	4	BN, WH, BU, BK	19 x 0.15 mm	4,90	LiYY-OB 4x0,34mm <sup>2</sup>	8058524
	4+PE	BN, WH, BU, BK, GN/YE	19 x 0.15 mm	5,30	LiYY-JB 4x0,34+1x0,34mm <sup>2</sup>	8058525
	5	BN, WH, BU, BK, GY	19 x 0.15 mm	5,30	LiYY-OB 5x0,34mm <sup>2</sup>	8058526
	8	WH, BN, GN, YE, GY, PK, BU, RD	14 x 0.15 mm	6,20	LiYY-OB 8x0,25	8058527
	12	BN, BU, WH, GN, PK, YE, BK, GY, RD, VT, GY/PK, RD/BU	18 x 0.10 mm	6,10	LiYY-OB 12x0,14	8058528
	3	BN, BU, BK	14 x 0.15 mm	4,80	LiYCY-OB 3x0,25	8058506
	4	BN, WH, BU, BK	14 x 0.15 mm	5,10	LiYCY-OB 4x0,25	8058507
	3	BN, BU, BK	19 x 0.15 mm	5,00	LiYCY-OB 3x0,34	8058508
	4	BN, WH, BU, BK	19 x 0.15 mm	5,30	LiYCY-OB 4x0,34	8058509
	5	BN, WH, BU, BK, GY	19 x 0.15 mm	5,90	LiYCY-OB 5x0,34	8058510
	8	WH, BN, GN, YE, GY, PK, BU, RD	14 x 0.15 mm	6,70	LiYCY-OB 8x0,25	8058511
	12	BN, BU, WH, GN, PK, YE, BK, GY, RD, VT, GY/PK, RD/BU	18 x 0.10 mm	6,60	LiYCY-OB 12x0,14	8058512
		3	BN, BU, BK	14 x 0.15 mm	4,30	LiYY-OB 3x0,25
4		BN, WH, BU, BK	14 x 0.15 mm	4,70	LiYY-OB 4x0,25	8082411
3		BN, BU, BK	19 x 0.15 mm	4,60	LiYY-OB 3x0,34	8082412
4		BN, WH, BU, BK	19 x 0.15 mm	4,90	LiYY-OB 4x0,34	8082413
4+PE		BN, WH, BU, BK, GN/YE	19 x 0.15 mm	5,30	LiYY-JB 4x0,34+1x0,34mm <sup>2</sup>	8082414

	Wire	Wire color	Conductor structure	ø [mm]	Item description	L=100m	
	PUR, Control line, S400	3	BN, BU, BK	32 x 0.10 mm	4,15	LiF9YH-11YH 3x0,25	8073161
		3	BN, BU, BK	42 x 0.10 mm	4,30	LiF9YH-11YH 3x0,34	8073032
		4	BN, WH, BU, BK	42 x 0.10 mm	4,40	LiF9YH-11YH 4x0,25	8073162
		4	BN, WH, BU, BK	42 x 0.10 mm	4,70	LiF9YH-11YH 4x0,34	8073033
		5	BN, WH, BU, BK, GY	32 x 0.10 mm	4,80	LiF9YH-11YH 5x0,25	8073163
		5	BN, WH, BU, BK, GY	42 x 0.10 mm	5,20	LiF9YH-11YH 5x0,34	8073164
		5	BN, WH, BU, BK, GN/YE	42 x 0.10 mm	5,20	LiF9YH-11YH 4x0,34+1x0,34	8073165
		8	WH, BN, GN, YE, GY, PK, BU, RD	32 x 0.10 mm	6,00	LiF9YH-11YH 8x0,25	8073166
	12	BN, BU, WH, GN, PK, YE, BK, GY, RD, VT, GY/PK, RD/BU	18 x 0.10 mm	5,60	LiF9YH-11YH 12x0,14	8073167	
	PUR, Control line, S570	5	BN, WH, BU, BK, GY	18 x 0,10 mm (0,14 mm <sup>2</sup> ) , 42 x 0,10 mm (0,34 mm <sup>2</sup> )	4,90	LiF9YH-11YH 3x0,14+2x0,34 UL/CSA 20549	8088696
	TPE, Control line, detergent-resistant, S3930	4	BN, WH, BU, BK	42 x 0.10 mm	4,60	SU (4 Li12Y 0,34) 14Y Sarlink 3139D	8058694
	PTFE, Control line, high temperature-proof, S2430	5	BN, WH, BU, BK, GY	7 x 0.254 mm	3,80	Li5Y5Y-OB 5xAWG22	8037921
	PUR, Bus cable, IE, shielded, S2171, Cat5e	4	YE, OG, WH, BU	7 x 0.25 mm	6,50	2YH(ST)C11Y2x2xAWG22	8036284
	PUR, Bus cable, IE, shielded, S5100, Cat5e	4	YE, OG, WH, BU	7 x 0.25 mm	6,50	2Y(ST)C11Y4xAWG22	8088017
	PUR, Bus cable, IE, shielded, S3400	4	BU, OG, WH/BU, WH/OG	19 x 0.10 mm	4,80	Li9YC(ST)11Y 1x4xAWG26, UL-Style 20963	8055896
	PUR, Bus cable, IE, shielded, S5058, Cat5e	4	OG, WH, BU, YE	7 x 0.25 mm	6,50	Cat5e flex Li2YH(ST)C-11Y-OB 4xAWG22	8089302
	PUR, Bus cable, IE, shielded, S5059, Cat5e	4	YE, OG, WH, BU	7 x 0,22 mm	5,20	Cat5e flex Li2YH(ST)C-11Y-OB 4xAWG24	8089303
	PUR, Bus cable, IE, shielded, S4030	8	WH/BU,BU ; WH/OG,OG ; WH/GN,GN ; WH/BN,BN	7 x 0.20 mm	9,40	ETHERLINE TORSION Cat. 7 (2170481)	8064607
	PUR, Bus cable, IE, shielded, S4031	8	WH/BU,BU ; WH/OG,OG ; WH/GN,GN ; WH/BN,BN	19 x 0.102 mm	7,80	Etherline FD P CAT.6 4x2xAWG26/19 2170488	8064606
	PUR, Bus cable, IE, shielded, S3500, Cat7	8	WH/OG,OG ; WH/GN,GN ; WH/BN,BN ; WH/BU,BU	7 x 0.16 mm	6,40	LI02YSC11Y 4x2x0,14 PIMF FRNC Cat. 7	8053361
	PUR, Bus cable, IE, Sercos, shielded, S3800, Cat5e	4	OG, WH, BU, YE	7 x 0.254 mm	6,50	2YH(ST)C11Y 1x4xAWG22	8055782

100m cable



	Wire	Wire color	Conductor structure	ø [mm]	Item description	L=100m	
	PUR, Bus cable, PROFIBUS, S1800	2	RD, GN	19 x 0.15 mm	7,60	Li02YS-STCB11Y 1x2x0,34	8043857
	PUR, Bus cable, CANopen/DeviceNet, S2800	4	WH, BU, RD, BK	19 x 0.13mm (0.25mm <sup>2</sup> ), 19 x 0.15mm (0.34mm <sup>2</sup> )	6,90	LIV02YS(ST)-CB11Y (2x0,25)+(2x0,34)	8047939
	PUR, Control line, POWER, S5015, 1,5 mm <sup>2</sup>	2+PE	BN, BU, GN/YE	extra finely stranded class 6	8,50	LiF9YH-11YH 3G1,5 S5015	8064082
		4	BN, WH, BU, BK	extra finely stranded class 6	9,60	LiF9YH-11YH 4x1,5 S5015	8064083
		3+PE	GY, BK, BN, GN/YE	extra finely stranded class 6	9,60	LiF9YH-11YH 4G1,5 S5015	8070663
		4+PE	BU, GY, BN, BK, GN/YE	extra finely stranded class 6	9,90	PUR/PP A 5G1,5	8083056
	PUR, Control line, POWER, S5015GY, 1,5 mm <sup>2</sup>	4+FE	BN, WH, BU, BK, GY	extra finely stranded class 6	9,90	LiF9YH-11YH 5G1,5 S5015	8094391
	PUR, Control line, POWER, S5025, 2,5 mm <sup>2</sup>	4	BN, WH, BU, BK	extra finely stranded class 6	11,00	LiF9YH-11YH 4x2,5 S5025	8064084
		4+PE	BU, GY, BN, BK, GN/YE	extra finely stranded class 6	11,70	PUR/PP A 5G2,5	8083057
	PUR, Control line, POWER, S5025GY, 2,5 mm <sup>2</sup>	4+FE	BN, WH, BU, BK, GY	extra finely stranded class 6	11,70	LiF9YH-11YH 5G1,5 S5015	8094392

## TECHNICAL INFORMATION

### Comprehensive Information on Connectors

The respective requirements of machinery specifications are binding for the user with connector applications. The relevant standards and specifications according to which our products are made and tested are explained in the following.

### IEC 61984; DIN EN 61984:2012-03; VDE 0627:2012-03 | Connectors – Safety requirements and tests

This international standard is valid for connectors and connecting devices with rated voltages up to 1000V ~ or 1500V – and rated currents up to 125A per contact intended for connecting assemblies or components in or on machinery or measuring-, instrumentation- or control circuits considering safety aspects. It is also valid for connectors and connecting devices on household appliances as well as information-processing units.

### IEC 60664; DIN EN 60664-1:2008-01; VDE 0110-1:2008-01 | Insulation coordination for electrical equipment

This international standard is a basic safety standard for achieving the coordination of isolation. It contains the required data to determine air distances, creep distances and solid insulations for electrical devices (e.g. connectors). This is realised considering the micro-ambient conditions and other loads they are exposed to in the course of the expected service life. Processes for the voltage test related to the coordination of isolation are included.

### IEC 60512; DIN EN 60512:2012-10; VDE 0687-512:2012-10 | Connectors for electronic equipment – Tests and measurements

This international standard determines the measuring- and testing-processes for electromechanical components (e.g. connectors). The standard is very comprehensive and consists of 9 sections in total in which all electrical, mechanical and climatic tests are described. In addition, the standard contains tests on soldering ability, density, shielding and cable pull-out support.

### IEC 60529; DIN EN 60529:2014-09; VDE 0470-1:2014-09 | Degrees of protection provided by enclosures (IP Code)

This international standard determines the designation, requirements and tests for the classification of protection degrees by housings for electrical devices (e.g. connectors). Thereby, protection against access to dangerous parts, protection against solid foreign bodies and protection against water are evaluated. The degree of protection is designated by an IP-Code.

### IEC 60068; DIN EN 60068:2015-09; VDE 0468:2015-09 | Environmental testing

This international standard contains basic determinations on environmental tests and degree of test-precision. This testing process serves to trace the resistivity of components to expected environmental influences under operating conditions. Typical tests are: coldness, dry and humid heat, shock, vibration, temperature fluctuation and others.

Changes in design are subject to further notice for reasons of quality improvements, refinement or production optimisation. The technical data stated in the catalogue refer to connectors, i.e. components which must not be plugged or unplugged under voltage. In order to secure the correct use of the products, the technical data are listed. It is possible to select the right products using these data. The products are described as well, however the properties are not assured. All ESCHA connectors have been developed and designed for applications in plant-, control and electric device version. It is up to the user to verify the possibility of using the connectors in other application areas as well. Data on properties and sealing refer to torques of 1.0Nm for M12-round connectors or 0.6Nm for M8-round connectors. All data concerning the IP-degrees of protection are only guaranteed for the connections of ESCHA components.

## Supplementary Technical Data

Characteristic	Standard <sup>1)</sup>	Note
Protection class housing	IEC 60529	Data in plugged condition
Mechanical life cycle	IEC 60512-5/9a	Test is done without electrical load
Rated voltage	IEC 60664-1	The stated value is defined in connection with degree of pollution and overvoltage category
Degree of pollution	IEC 60664-1	
Current load	IEC 60512-3/5b	
Contact resistance	IEC 60512-2/2a	Contact resistance contact-pin/contact-bush in plugged condition throughout a defined range
Insulation resistance	IEC 60512-2/3a	Insulation between two conducting parts (dependent on material)

<sup>1)</sup>The technical data represent initial values which can change depending on load. The housings have to be included in the device protective-measures when mounting electrically conductive receptacle housings. The cables to be connected should be insulated in such a way that the distances to electrically conductive parts are not reduced. When soldering the cables, care must be taken that none of the single wires is projecting which can cause short circuits.

	Digit 1	Digit 2
0	Unprotected	Unprotected
1	Protected against access to dangerous parts by hand pressure. Protected against solid foreign bodies Ø50mm.	Protected against dripping water
2	Protected against access to dangerous parts by fingers. Protected against solid foreign bodies Ø12.5mm.	Protected against dripping water when housing is inclined up to 15°
3	Protected against access to dangerous parts by a tool. Protected solid foreign bodies Ø2.5mm.	Protected against spraying water
4	Protected against access to dangerous parts by a wire. Protected against solid foreign bodies Ø1mm.	Protected against sprinkling water
5	Protected against access to dangerous parts by a wire. Protected against dust.	Protected against water-jet
6	Protected against access to dangerous parts by wire. Protected against dust.	Protected against a strong water-jet
7		Protected against effects due to temporary immersion in water
8		Protected against effects due to permanent immersion in water. (Conditions to be agreed upon between manufacturer and user. However, conditions must be more difficult than with IP_7)
9		Protected against water by high-pressure steam-jet cleaning

## Degrees of Protection | IP: International Protection

For reasons of safety, connectors must be protected against environmental influences, e.g. dust, foreign bodies, touch, humidity and water. In case of industrial connectors, this protection must be provided for by the housing and its locking as well as the insulation on cable outlet.

The degrees of protection are indicated by an abbreviation consisting of two constant characteristic letters IP (International Protection) and two following digits for the protection degree. The first digit indicates the protection degree against touch and foreign bodies. The second digit indicates the protection against damaging ingress of water. All data are only valid in locked condition. Awarding degrees of protection is subject to a standardised testing procedure.

**Rated voltage**

Specifies the maximum electrical voltage during standard operation. Operating properties of round connectors are related to rated voltage.

**Insulation resistance**

The insulating capacity of a material is defined as separating adjacent contacts or a contact against ground at a high-impedance as possible according to IEC 60512-2, 3a and DIN EN 60512-2.

**Current load**

According to DIN ISO 60512-3, the current load of a round connector defines the maximum permissible current permanently and concurrently flowing through all contacts at an ambient temperature of 40°C. The total current-related self-heating and ambient temperature must not exceed the maximum limit temperature of a round connector – defined by the thermal properties of the materials used. The so called derating-curve illustrates the relation between the current load of a round connector and its ambient temperature. In practice, possibly higher currents per contact are permissible as not all contacts are permanently energized at a maximum rate. Exact values are to be individually determined by testing.

**Isolation coordination (air- and creepage distance)**

For electrical equipment in low-voltage installations (<1kV), DINEN60664 (DINVDE0110) describes the process of measuring the isolating air- and creepage distance. It defines minimum air distances (minimum distances between voltage carrying parts in the air) and minimum creepage distances (minimum distance between voltage carrying parts along an isolating surface) to avoid an electrical flashover. Minimum creepage distances depend on isolating material and degree of pollution.

**Degree of pollution**

The degree of pollution (1-4) defines the quantity of pollution (solid, liquid or gaseous impurities), at which the dielectric strength and/or surface resistance are reduced. For industrial applications, a degree of pollution 3 is typical: conductive or dry, non-conductive pollution occurs. The latter can become conductive through the expected thawing.

**Mechanical life cycle**

Defines the number of mating cycles (a mechanical connect- and disconnect process of a round connector), during which no abrasion of contact surfaces occurs and thus increasing contact resistance.

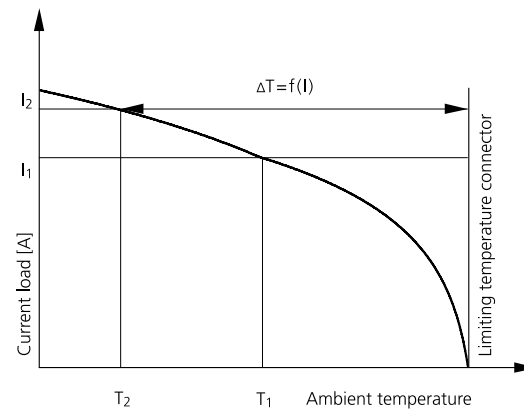


Fig 1. Derating-curve

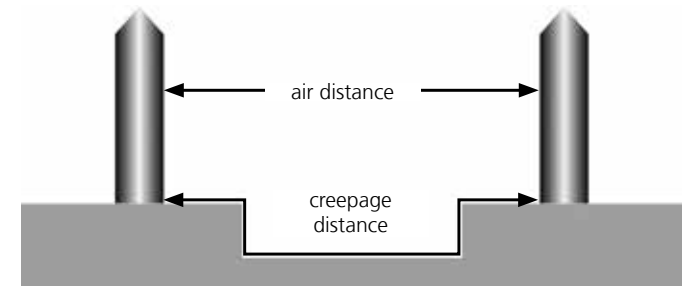


Fig 2. Isolation coordination

AWG	Wire structure [mm]	Wire diameter [mm]	Wire cross-section [mm <sup>2</sup> ]
30	1 x 0.25   7 x 0.10	0.25   0.36	0.05   0.06
28	1 x 0.32   7 x 0.13	0.32   0.38	0.08   0.09
26	1 x 0.4   7 x 0.16   19 x 0.10	0.40   0.48   0.51	0.13   0.14   0.15
24	1 x 0.51   17 x 0.20   19 x 0.13	0.51   0.61   0.64	0.21   0.22   0.25
22	1 x 0.64   7 x 0.25   19 x 0.16	0.64   0.76   0.81	0.33   0.34   0.38
20	1 x 0.81   7 x 0.32   19 x 0.20	0.81   0.97   1.02	0.52   0.56   0.60
18	1 x 1.02   19 x 0.25	1.02   1.27	0.82   0.93
16	19 x 0.29	1.44	1.25
14	19 x 0.36	1.80	1.93
12	19 x 0.46	2.29	3.16
10	37 x 0.40	3.10	4.65

#### Conversion of American Wire Gauge, AWG in mm<sup>2</sup>

In some industrial areas, the American Wire Gauge is also used for cables. The following table serves the conversion from AWG in mm<sup>2</sup>. It should be taken into consideration that wires with the same AWG-number but different structures show slightly different cross sections.

Pg	Metric thread	max.Wrench width [mm]	max.Corner length [mm]
Pg7	M10x1.5   M12x1.5	16	18
Pg9   Pg11	M16x1.5	21	23
Pg13.5	M20x1.5	25	28

#### Overview Pg-thread vs. metric thread (wrench width for cable screwing according to EN50262)


The interim period for DIN46320 "screwing for cables and conducting lines with Pg-thread" expired on 31 December 1999. Since then, screwing for cables and conducting lines had to comply with the national standard 46319 before this was replaced by EN50262 on 1 March 2001.

## CERTIFICATIONS

### UL (Underwriter Laboratories Inc.)

The certification of products, components or materials by the Underwriter Laboratories Inc. is the verified proof that it meets the specific safety requirements. UL-approvals are, above all, required for the American and Canadian market.

For relevant ESCHA products, component approvals (UL Recognized Component) apply, qualifying them as UL-approved components for installation into UL-approved systems. This component approval also holds for relevantly used cable qualities. Single cable qualities (see Standard Cable qualities table) carry the UL-Listing-certification mark (device approval), which guarantees compliance with the valid UL-safety standards.





#### **ECOLAB**

ECOLAB supplies special detergents and disinfectants for the food processing industry. In the past, the company has offered ECOLAB-resistance tests to component manufacturers. Meanwhile, component suppliers have been provided with detergents for field tests. ESCHA is currently carrying out similar tests according to ECOLAB specifications in its own test lab.



#### **FDA**

The Food and Drug Administration (FDA) is a state-controlled, US-American agency in charge of food control and drugs approvals. It defines materials for food production that cause no interactions in the processing procedure. ESCHA exclusively uses FDA-approved materials for its Hygienic Design product line.



#### **Guideline 2011/65/EU (RoHS - Restriction of [the use of certain] Hazardous Substances)**

The EU-Guideline restricting the use of certain hazardous substances in electrical- and electronic devices does not allow hazardous substances in devices and components above defined limits. Lead, cadmium, mercury, hexavalent chromium, polybrominated biphenyls (PBB), and polybrominated diphenyl (PBDE) are among the hazardous substances. For ESCHA products, this means lead-free soldering and no use of flame retardants in plastics and cables.



#### **Guideline SJ/T 11364-2014 (China RoHS Standard)**

For ESCHA items, compliance with the guidelines is established with EUP-Label (Environmentally friendly Use Period). Permissible residues of hazardous substances in the product according to RoHS guidelines are chemically ligated in such a way that they do not escape in a period of 50 years (number in EUP-Label) under normal environmental conditions.



#### **CE-Designation**

The CE-Designation indicates the conformity of a product with harmonized EU standard and therein defined requirements.



#### **EAC-marking**

With the EAC-marking, the manufacturer, distributor or authorized representative declares that the product complies with the current safety requirements as laid down in the Technical Regulations of the Eurasian Economic Union. EAC is an abbreviation for Eurasian Conformity. The EAC mark was introduced in August 2013. The EAC mark is similar in content to the European CE mark.



#### **Directive 2012/19/EU on Waste Electrical and Electronic Equipment**

The WEEE-Directive 2012/19/EU (Waste Electrical and Electronic Equipment) serves to avoid wastes of Electrical- and Electronic devices and the reduction of such wastes through recycling and other forms of further processing. It specifies minimum standards for handling Waste Electrical and Electronic Equipment in the EU. ESCHA is a registered manufacturer (EAR-Registration No. DE58790594).

EMC of devices has gained more significance since the publication of the law on electromagnetic compatibility. The devices have to be made in such a way that:

- The generation of electromagnetic interferences is limited to the extent that a proper operation of these devices is possible.
- The devices have an adequate stability against electromagnetic interferences in order that a proper operation is possible.


The ESCHA two-shell-shielding concept comprises an equipotential surface through two interconnected metal shells encapsulating the round connector at 360°. The shield braid of the molded cable is crimped all around on the shield sleeve. A twofold-overmold provides for 360°-shielding even at high mechanical stresses, dust- and waterproof at high pressure- and steam jet cleaning according to IP67 and IP69.



The correct installation of the round connector and a professional wiring are the precondition for properties of a relevantly tight and reliable electrical connection guaranteed by the manufacturer. In order to avoid damage to a round connector and cable, the minimum bending radius of the cable ( $r_{min}$ ) is to be observed during the wiring.

Data lines are high-performance products. Avoid any mechanical influences like squeezing, edgy snapping and tractive forces during mounting and operating to ensure a permanent and safe data transmission. Be careful while mounting at sub-zero temperatures, as plastics boast different features at low temperatures and the end product might be damaged. When using cable ties for cable bundling or permanent wiring, the ties must not cut into or deform the cable to avoid short circuits, cable interruptions or a reduction of the dielectric strength.

In case of double-ended cordsets, sufficient cable length between the connections should be observed in order to absorb the generated energy during movement. The use of cable loops, spiral lines or cable chains guarantees a high life cycle of the round connector system.

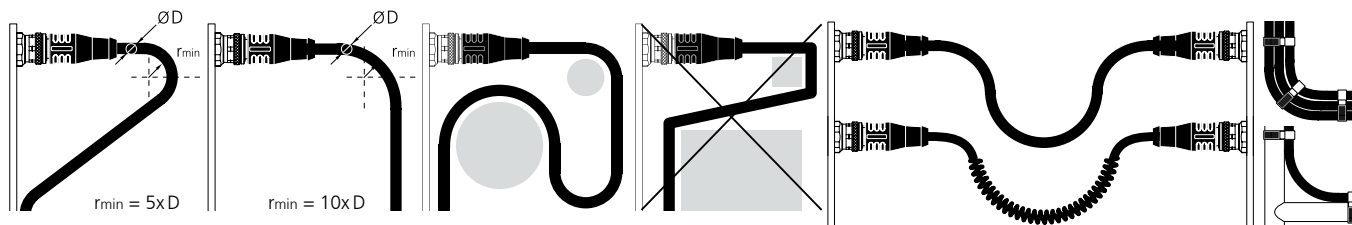

## Recommended tightening torque

The use of a torque application tool is recommended for tightening and loosening of round connectors. The recommendations base on internal tests and cover a majority of applications and product combinations. Due to the design variety of products available on the market, specifications have to be checked in individual cases.

### Recommended tightening torque according to IEC 61076-2 test requirements

Round connectors	M12	1.0Nm
	M8	0.6Nm
Receptacles	M12	2.0Nm
	M8	1.5Nm
Valve connectors	VA	1.0Nm
	VB   VBI	1.0Nm
	VC   VCI	0.6Nm

### Pinout M12 | A

Sensor/actuator: AL | FB | HT



		Contact											
Pins	Coding	1	2	3	4	5	6	7	8	9	10	11	12
3	A	BN		BU	BK								
4	A	BN	WH	BU	BK								
4+PE	A	BN	WH	BU	BK	GYE							
5	A	BN	WH	BU	BK	GY							
8	A	WH	BN	GN	YE	GY	PK	BU	RD				
12	A	BN	BU	WH	GN	PK	YE	BK	GY	RD	VT	GYPK	RDBU


### Pinout M8/Ø8mm snap

Sensor/actuator: AL | FB | HT



		Contact											
Pins	Allocation code	1	2	3	4	5							
3		BN		BU	BK								
4		BN	WH	BU	BK								
4	4.028	BN		BU	BK								
5		BN	WH	BU	BK	GY							



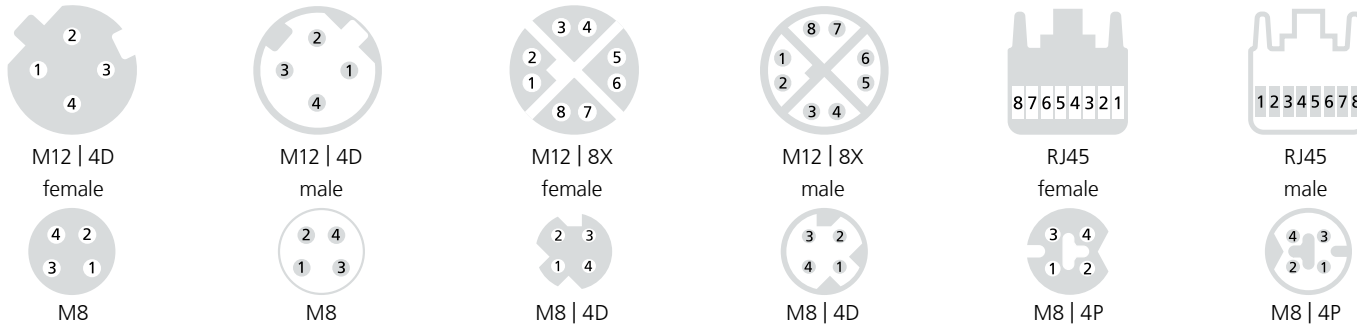

				Contact							
Type	Pins	Coding	Allocation code	1	2	3	4	5	6	7	8
M12	4	D	4.029	YE	WH	OG	BU				
M12	4	D	4.082	WHOG	WHBU	OG	BU				
M12	8	X	8.066	WH	OG	WH	GN	WH	BN	WH	BU
RJ45	4		4.003	YE	OG	WH			BU		
RJ45	4		8.005	WHOG	OG	WHBU			BU		
RJ45	8		8.002	WHOG	OG	WHGN	BU	WHBU	GN	WHBN	BN
M8	4		4.027	WHOG	WHBU	BU	OG				
M8	4	P	4.054	YE	WH	BU	OG				
M8	4	D	4.071	WHOG	OG	WHBU	BU				
M8	4	D	4.073	YE	WH	OG	BU				




				Contact							
Type	Pins	Coding	Allocation code	1	2	3	4	5			
M12	5	B	2.012		GN		RD				



				Contact							
Type	Pins	Coding	Allocation code	1	2	3	4	5			
M12	4+GND	A	5.022		RD	BK	WH	BU			
				GND	+	-	CAN_H	CAN_L			


Pinout M12 POWER

PS | PT | PK | PL

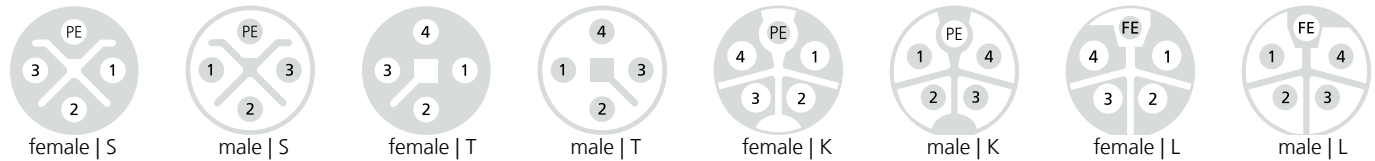


Pins	Coding	Allocation code	1	2	3	4	5						
2+PE	S	3.002	BN		BU	GNYE							
3+PE	S	4.155	BN	BK	GY	GNYE							
4	T	4	BN	WH	BU	BK							
4+PE	K	5.244	BK	BN	GY	BU	GNYE						
4	L	4	BN	WH	BU	BK							
4+FE	L	5.269	BN	WH	BU	BK	GY						

Allocation I/O-junctions M12

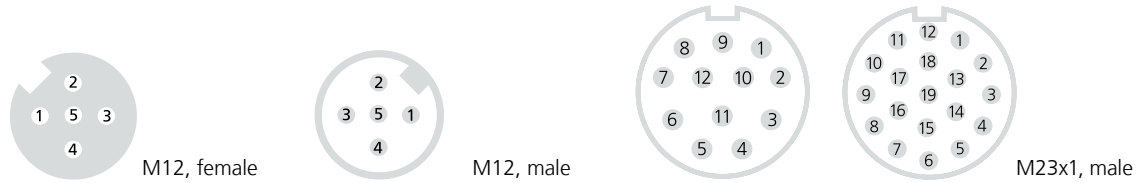


M12																			
I/O	1		2		3		4		5		6		7		8		all	all	all
I/O_Pin	2	4	2	4	2	4	2	4	2	4	2	4	2	4	2	4	1	3	5
M23_12 pins	-	1	-	2	-	3	-	4	-	5	-	6	-	7	-	8	11	9+10	12
M23_19 pins	7	15	4	5	8	16	14	3	9	17	13	2	10	11	18	1	19	6	12
Cable	GYPK	WH	RDBU	GN	WHGN	YE	BNGN	GY	WHYE	PK	YEBN	RD	WHGY	BK	GYBN	VT	BN (+)	BU (-)	GNYE

Allocation I/O-junctions M8/Ø8mm snap

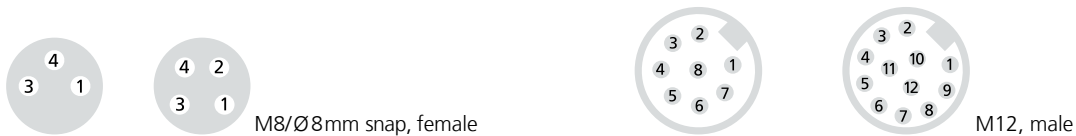


M8/Ø8mm snap																				
I/O	1		2		3		4		5		6		7		8		9	10	all	
I/O_contacts	4	2	4	2	4	2	4	2	4	2	4	2	4	2	4	2	4	4	1	3
M12_12 pins (I/O 3 pins)	3	-	4	-	6	-	8	-	5	-	9	-	7	-	10	-	11	12	1	2
M12_12 pins (I/O 4 pins)	3	5	4	9	6	7	8	10	-	-	-	-	-	-	-	-	11	12	1	2
M12_8 pins	1	-	2	-	3	-	4	-	-	-	-	-	-	-	-	-	-	-	5	7
Cable	WH	GYPK	GN	RDBU	YE	WHGN	GY	BNGN	PK	WHYE	RD	YEBN	BK	WHGY	VT	GYBN	WHPK	BNPK	BN (+)	BU (-)



Pinout M23x1



female




male




	Pin																		
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
12.001	WH	GN	YE	GY						BU	BN	GNYE							
12.003	WH	GN	YE	GY	PK	RD	BK	VT		BU	BN	GNYE							
19.001			GY	RDBU	GN	BU	GYPK	WHGN				GNYE		BNGN	WH	YE			BN
19.003	VT	RD	GY	RDBU	GN	BU	GYPK	WHGN	WHYE	WHGY	BK	GNYE	YEBN	BNGN	WH	YE	PK	GYBN	BN


Pinout Valve connector




VA21




VA22




VB21



VB122



VC21



VC22

			Pin							
Type	Allocation code		1	2	3   PE	PE				
A	21	2 contacts + PE	BN	BU		GNYE				
A	22	2 contacts + PE jumpered	BN	BU		GNYE				
A	41	3 contacts + PE + wire connection	BN	WH	BK	GNYE				
B   BI	21	2 contacts + PE	BN	BU		GNYE				
C   CI	21	2 contacts + PE	BN	BU		GNYE				
C   CI	22	2 contacts + PE jumpered	BN	BU		GNYE				



### Let's move on to [escha.net](https://www.escha.net)

On the internet you will find detailed information about ESCHA sales-offices and -partners outside Germany as well as our products. Visit [escha.net](https://www.escha.net) and use the comfortable product-search or download our eCatalog. By clicking on the item number, you will be directly redirected to the detail information of your desired item. Afterwards, our data-sheets and step-files can be downloaded for free.