




Y-splitter, M12, male, straight, 4 poles, M8, female, straight, 3 poles, M8, female, straight, 3 poles

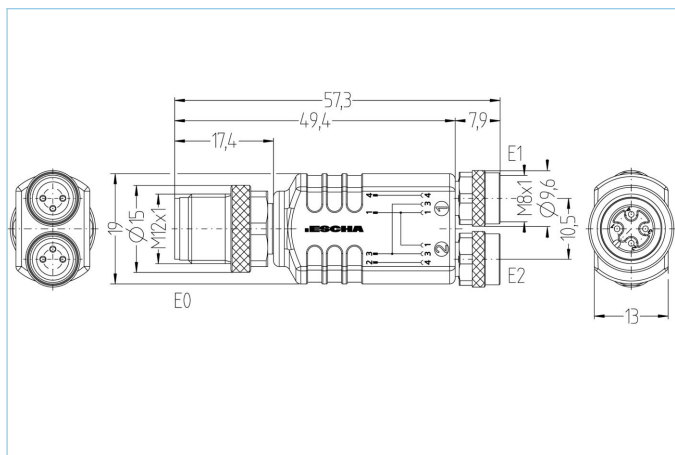

Product data

Item description	Y-FS4M12-2AL-SKP3/S213
Item-No.	8008841
Customs tariff-No.	85366990
Step-File	Y-FS4M12-2AL-SKP3.stp

Technical data	Exit 0	Exit 1	Exit 2
Connector	male, M12	female, M8	female, M8
Contact material	Metal, CuZn, gold-plated	Metal, CuZn, gold-plated	Metal, CuZn, gold-plated
Contact-carrier material	Plastic, TPU, BK	Plastic, TPU, GY	Plastic, TPU, BK
Coupling nut material	Metal, CuZn, nickel-plated	Metal, CuZn, nickel-plated	Metal, CuZn, nickel-plated
Rated voltage	50V _{AC} / 60V _{DC}	50V _{AC} / 60V _{DC}	50V _{AC} / 60V _{DC}
Coding of	A		
Number of pins	4	3	3
Current load (at 40°C)	4A	4A	4A

Insulation resistance $\geq 10^8 \Omega$

Ambient temperature product -30°C...+90°C

Grip body material Plastic, TPU, BK

Sealing (female) material FPM/FKM

Mechanical life-cycle >100 mating cycles

Standards IEC 61076-2-101/104

Degree of protection (mounted) IP65, IP67, IP68

Degree of pollution 3

Classification

eCl@ss 6.0	27279201
eCl@ss 7.0	27279201
eCl@ss 8.0	27279201
eCl@ss 9.0	27440106
ETIM 5.0	EC002062
ETIM 6.0	EC002925

Link to product

<https://www.escha.net/en/products/standard/t-splitters-y-splitters/8008841>