



Field-wireable, M12, female, straight, 5 poles, cable-entry 2-way, screw-/clamp contact

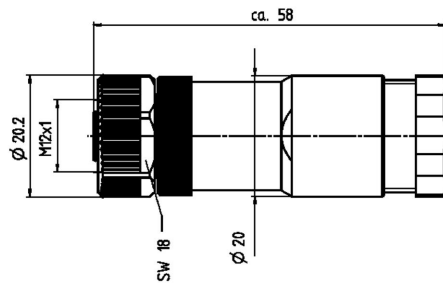

Product data

Item description	FKMC5K
Item-No.	8017230
Step-File	FKMC5K.stp
EAN	4047106142407

Technical data

Connector	female, Duo sealed, straight, M12
Number of pins	5
Coding	A
Rated voltage	60V
Current load per pin (at 40°C)	4A
Insulation resistance	$\geq 10^9 \Omega$
Resistance	$\leq 8 m\Omega$
Ambient temperature product	-40°C...+85°C
Contact material	Metal, CuZn, CuSnZn
Contact-carrier material	Plastic, PA, BK
Grip body material	Plastic, PA, BK
Connecting cross-section	0.75 mm ²
Cable outlet	2 x Ø 2,1-3 mm Ø 4-5 mm
Connecting type	Screw-/clamp contact
Standards	IEC 61076-2-101
Degree of protection (mounted)	IP67
Mechanical life-cycle	>100 mating cycles
Degree of pollution	3
Style	straight