



Field-wireable, M12, male, angled, 5 poles, screw-/clamp contact

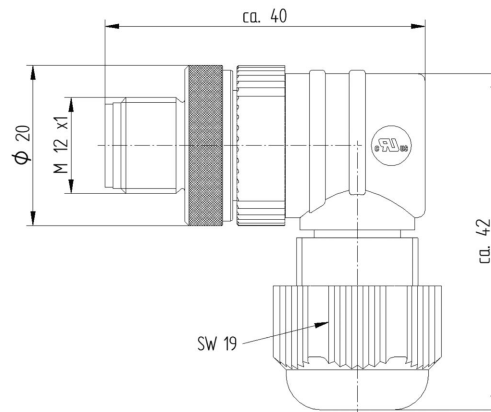

Product data

Item description	WWASC5K/9
Item-No.	8021722
Customs tariff-No.	85366990
EAN	4047106316846

Technical data

Connector	male, angled, M12
Number of pins	5
Coding	A
Rated voltage	60V
Current load per pin (at 40°C)	4A
Insulation resistance	$\geq 10^9 \Omega$
Resistance	$\leq 5 m\Omega$
Ambient temperature product	-25°C...+90°C
Contact material	Metal, CuZn, CuSnZn
Contact-carrier material	Plastic, PA, BK
Grip body material	Plastic, PBT, BK
Coupling nut material	Metal, CuZn, nickel-plated
Connecting cross-section	max. 0,75 mm ²
Cable outlet	Seal with colour code 6...7mm black seal 7...8mm
Connecting type	Screw-/clamp contact
Standards	IEC 61076-2-101
Degree of protection (mounted)	IP67
Mechanical life-cycle	>100 mating cycles
Degree of pollution	3
Style	angled