
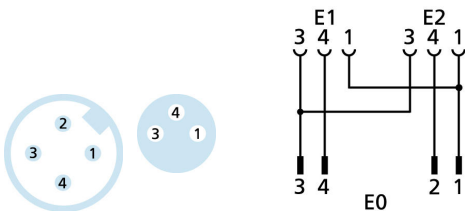


Y-splitter, M12, male, straight, 4 poles, M8, female, straight, 3 poles, M8, female, straight, 3 poles

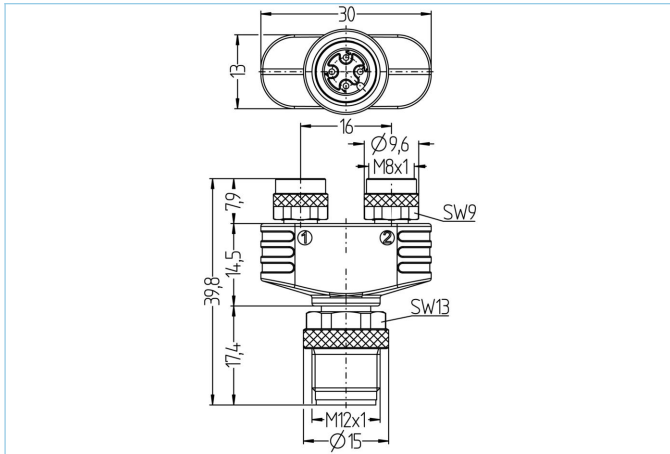

Product data

Item description	Y-WAS4-2SKP3/S55
Item-No.	8027000
Customs tariff-No.	85366990
EAN	4047106021764

Technical data	Exit 0	Exit 1	Exit 2
Connector	male, M12	female, M8	female, M8
Contact material	Metal, CuZn, gold-plated	Metal, CuZn, gold-plated	Metal, CuZn, gold-plated
Contact-carrier material	Plastic, TPU, BK	Plastic, TPU, BK	Plastic, TPU, BK
Coupling nut material	Metal, CuZn, nickel-plated	Metal, PTFE coated	Metal, CuZn, nickel-plated
Rated voltage	60V	60V	60V
Coding of	A		
Number of pins	4	3	3
Current load (at 40°C)	4A	4A	4A

Insulation resistance	$\geq 10^9 \Omega$
Ambient temperature product	-30°C...+90°C
Grip body material	Plastic, TPU, BU
Sealing (female) material	FPM/FKM
Mechanical life-cycle	>100 mating cycles
Standards	IEC 61076-2-101/-104
Degree of protection (mounted)	IP65, IP67, IP68
Degree of pollution	3