



Field-wireable, 7/8", female, angled, 4+PE, screw-/clamp contact

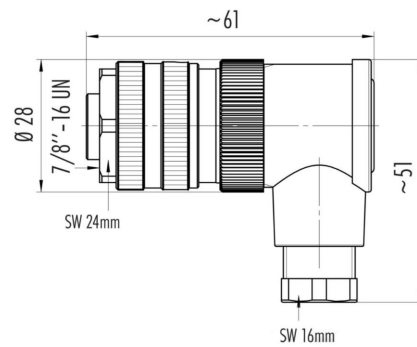

Product data

Item description	WWAKC50/PG9
Item-No.	8040621
Customs tariff-No.	85366990
EAN	4047106298210

Technical data

Connector	male, angled, 7/8"
Number of pins	4+PE
Rated voltage	300V
Current load per pin (at 40°C)	9A
Insulation resistance	$\geq 10^8 \Omega$
Resistance	$\leq 5 m\Omega$
Ambient temperature product	-25°C...+85°C
Contact material	Metal, CuZn, gold-plated
Contact-carrier material	Plastic, PA, BK
Grip body material	Plastic, PBT, BK
Connecting cross-section	max. 1.50 mm ²
Cable outlet	6...8 mm
Connecting type	Screw-/clamp contact
Degree of protection (mounted)	IP67
Mechanical life-cycle	>100 mating cycles
Degree of pollution	3
Style	angled