



## M12, female, straight, 3 poles, M12, male, angled, 3 poles, sensor-/actuator cable

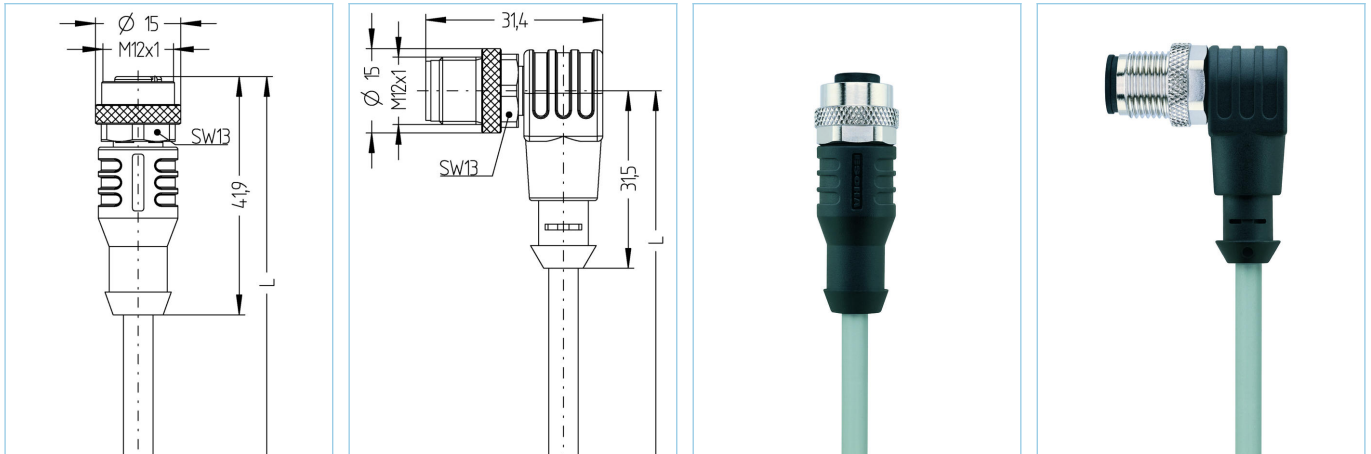

### Product data

|                    |                        |
|--------------------|------------------------|
| Item description   | AL-WAK3-1-AL-WWAS3/P01 |
| Item-No.           | 8051673                |
| Length             | 1m                     |
| Customs tariff-No. | 85444290               |
| Step-File          | AL-WAK3_AL-WWAS3.stp   |
| EAN                | 4047106031695          |

### Technical data

|                                | A-side                     | B-side                     |
|--------------------------------|----------------------------|----------------------------|
| Connector                      | female, straight, M12      | male, angled, M12          |
| Number of pins                 | 3                          | 3                          |
| Pin assignment                 | 1 BN, 3 BU, 4 BK           | 1 BN, 3 BU, 4 BK           |
| Coding of                      | A                          | A                          |
| Rated voltage                  | 250V                       | 250V                       |
| Current load (at 40°C)         | 4A                         | 4A                         |
| Insulation resistance          | $\geq 10^9 \Omega$         | $\geq 10^9 \Omega$         |
| Resistance                     | $\leq 5 m\Omega$           | $\leq 5 m\Omega$           |
| Ambient temperature product    | -30°C...+90°C              | -30°C...+90°C              |
| Contact material               | Metal, CuSn, gold-plated   | Metal, CuSn, gold-plated   |
| Contact-carrier material       | Plastic, TPU, BK           | Plastic, TPU, BK           |
| Grip body material             | Plastic, TPU, BK           | Plastic, TPU, BK           |
| Coupling nut material          | Metal, CuZn, nickel-plated | Metal, CuZn, nickel-plated |
| Sealing (female) material      | FPM/FKM                    |                            |
| Standards                      | IEC 61076-2-101            | IEC 61076-2-101            |
| Degree of protection (mounted) | IP65, IP67, IP68           | IP65, IP67, IP68           |
| Mechanical life-cycle          | >100 mating cycles         | >100 mating cycles         |
| Degree of pollution            | 3                          | 3                          |

## Cable web PVC, UL, P01, GY

PVC-cable for measurement and control-, and sensor technology. Suitable for applications in dry areas on packaging machines, assembly- and conveyor technology. High flexibility with unstressed movement (conditional drag-chain application possible). Predestined for applications in food- and beverage industry.

|                              |                                                                                                                                                                  |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Outer diameter of jacket     | 4.60 mm                                                                                                                                                          |
| Cable-jacket material        | PVC                                                                                                                                                              |
| Jacket color                 | GY, similar RAL7040                                                                                                                                              |
| Wire cross-section           | 3 x 0.34 mm <sup>2</sup>                                                                                                                                         |
| Wire insulation material     | PVC                                                                                                                                                              |
| Wire colors                  | BN, BU, BK                                                                                                                                                       |
| Wire structure               | 19 x 0.15 mm                                                                                                                                                     |
| Bending radius (fixed)       | 5 x Ø-cable                                                                                                                                                      |
| Bending radius (repeated)    | 10 x Ø-cable                                                                                                                                                     |
| Temperature range (repeated) | 0°C...+80°C                                                                                                                                                      |
| Temperature range (fixed)    | -25°C...+80°C                                                                                                                                                    |
| Rated voltage cable          | ≤300 V                                                                                                                                                           |
| Special features             | good resistance against oils and chemicals, LABS free, ozone resistant, recyclable, RoHs compliant, acid- and alkali resistant, seawater resistant, UV resistant |

## Classification

|            |          |
|------------|----------|
| eCl@ss 6.0 | 27279218 |
| eCl@ss 7.0 | 27279218 |
| eCl@ss 8.0 | 27279218 |
| eCl@ss 9.0 | 27060311 |
| ETIM 5.0   | EC001855 |
| ETIM 6.0   | EC001855 |

## Accessories

Mounting-clip, M12

<https://www.escha.net/en/products/standard/accessories-for-connectivity/8047660>

Torque-wrench set

<https://www.escha.net/en/products/standard/accessories-for-connectivity/8055431>

Marking rings Ø 9mm

<https://www.escha.net/en/products/standard/accessories-for-connectivity?p=1&o=3&n=15&f=809>

Screw plug, M12

<https://www.escha.net/en/products/standard/accessories-for-connectivity?p=1&o=3&n=15&f=812>

Screw cap, M12

<https://www.escha.net/en/products/standard/accessories-for-connectivity?p=1&o=3&n=15&f=811>

## Link to product

<https://www.escha.net/en/products/standard/sensoractuator-connectors/8051673>