



Receptacle, 7/8", male, straight, 5 poles, front wall-mounting, wire contact, sensor/actuator

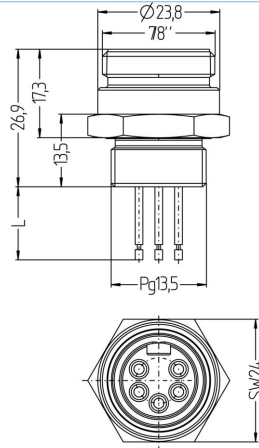

Product data

Item description	FS503-0,5
Item-No.	8052814
Customs tariff-No.	85366990
Packaging unit	5
EAN	4047106315511

Technical data

Connector	male, straight, 7/8"
Number of pins	5
Rated voltage	250V
Current load per pin (at 40°C)	5.3A
Insulation resistance	$\geq 10^8 \Omega$
Ambient temperature product	-30°C...+90°C
Contact material	Metal, CuZn, gold-plated
Contact-carrier material	Plastic, TPU, BK
Receptacle housing material	Aluminum, black anodized
Material of external sealing	NBR
Shielding	without shielding
Mounting direction	Front wall-mounting (without fixing screw)
Wrench size of fastening nut	A/F24
Wire length	0.50m
Wire colors	BK, BU, GN/YE, BN, WH
Wire cross-section	5 x 0.75 mm ²
Wire insulation material	PVC
Fastening thread	PG13,5
Connecting type	Wire contact
Degree of protection (mounted)	IP65, IP67, IP68
Mechanical life-cycle	>100 mating cycles
Degree of pollution	3
Style	straight

Classification	
eCl@ss 6.0	27279220
eCl@ss 7.0	27440103
eCl@ss 8.0	27440103
eCl@ss 9.0	27440103
ETIM 5.0	EC002061
ETIM 6.0	EC002061