


## M8, female, straight, 3 poles, sensor-/actuator cable

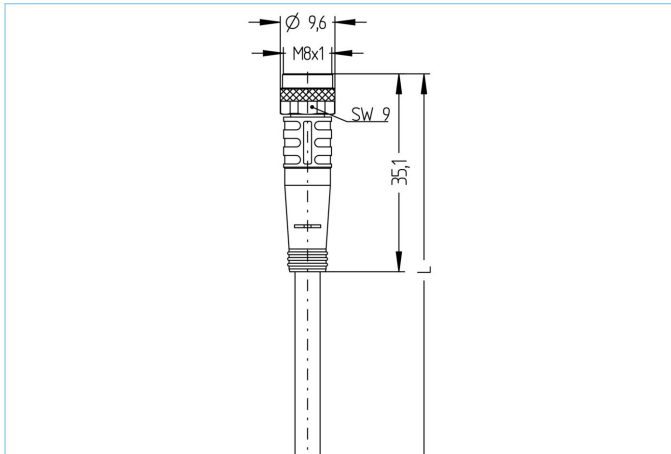

### Product data

|                    |                 |
|--------------------|-----------------|
| Item description   | AL-SKP3-1/S7400 |
| Item-No.           | 8063323         |
| Length             | 1m              |
| Customs tariff-No. | 85444290        |
| Step-File          | AL-SKP3.stp     |
| EAN                | 4047106193447   |

### Technical data

|                                |                            |
|--------------------------------|----------------------------|
| Connector                      | female, straight, M8       |
| Number of pins                 | 3                          |
| Pin assignment                 | 1 BN, 3 BU, 4 BK           |
| Rated voltage                  | 60V                        |
| Current load per pin (at 40°C) | 4A                         |
| Insulation resistance          | $\geq 10^9 \Omega$         |
| Resistance                     | $\leq 5 m\Omega$           |
| Ambient temperature product    | -30°C...+90°C              |
| Contact material               | Metal, CuSn, gold-plated   |
| Contact-carrier material       | Plastic, TPU, BK           |
| Grip body material             | Plastic, TPU, BK           |
| Coupling nut material          | Metal, CuZn, nickel-plated |
| Sealing (female) material      | FPM/FKM                    |
| Standards                      | IEC 61076-2-104            |
| Degree of protection (mounted) | IP65, IP67, IP68           |
| Mechanical life-cycle          | >100 mating cycles         |
| Cable end assembly             | open cable end             |
| Degree of pollution            | 3                          |
| Style                          | straight                   |

|                  |                                |
|------------------|--------------------------------|
| <b>Cable web</b> | <b>PUR, UL, S7400, robotic</b> |
|------------------|--------------------------------|

Flexible, silicone- and halogen free control cable with high mechanical strength. Due to its outstanding properties in drag-chain adaption, torsionresistance and weld-field immunity, it is very well suited for the flexible applications in robotics, handling- and assembly technology as well as machine tools. The cable meets the UL and CSA (UL10493/20549; cULus) requirements.

|                                |  |
|--------------------------------|--|
| Outer diameter of jacket       | 4.60 mm  |
| Cable-jacket material          | PUR  |
| Jacket color                   | OG, similar RAL2003  |
| Wire cross-section             | 3 x 0.25 mm <sup>2</sup>   |
| Wire insulation material       | PP   |
| Wire colors                    | BN, BU, BK   |
| Wire structure                 | 32 x 0.10 mm   |
| Bending radius (fixed)         | 5 x Ø-cable  |
| Bending radius (repeated)      | 10 x Ø-cable   |
| Temperature range (repeated)   | -30°C...+90°C  |
| Temperature range (fixed)      | -40°C...+90°C  |
| Temperature range (drag chain) | -25°C...+60°C  |
| Drag chain-application         | ≥ 10 Mio. cycles   |
| Halogen-free                   | Yes  |
| Torsion                        | +/-360°/m, ≥ 10 Mio. cycles  |
| Rated voltage cable            | ≤300 V   |
| Special features               | flame retardant, halogen free, hydrolysis proof, LABS free, oil resistant, ozone resistant, recyclable, RoHs compliant, acid- and alkali resistant, drag chain-adapted, welding sparks resistant, seawater resistant, silicone free, torsion resistant, UV resistant |

|                       |  |
|-----------------------|--|
| <b>Classification</b> |  |
|-----------------------|--|

|            |          |
|------------|----------|
| eCl@ss 6.0 | 27279218 |
| eCl@ss 7.0 | 27279218 |
| eCl@ss 8.0 | 27279218 |
| eCl@ss 9.0 | 27060311 |
| ETIM 5.0   | EC001855 |
| ETIM 6.0   | EC001855 |

|                    |
|--------------------|
| <b>Accessories</b> |
|--------------------|

|                          |
|--------------------------|
| <b>Mounting-clip, M8</b> |
|--------------------------|

<https://www.escha.net/en/products/standard/accessories-for-connectivity/8047658>

|                          |
|--------------------------|
| <b>Torque-wrench set</b> |
|--------------------------|

<https://www.escha.net/en/products/standard/accessories-for-connectivity/8055431>

|                            |
|----------------------------|
| <b>Marking rings Ø 9mm</b> |
|----------------------------|

<https://www.escha.net/en/products/standard/accessories-for-connectivity?p=1&o=3&n=15&f=809>

|                       |
|-----------------------|
| <b>Screw plug, M8</b> |
|-----------------------|

<https://www.escha.net/en/products/standard/accessories-for-connectivity/8081771>

|                             |
|-----------------------------|
| <b>Cable Stripping Tool</b> |
|-----------------------------|

<https://www.escha.net/en/products/standard/accessories-for-connectivity/8066215>

|                             |
|-----------------------------|
| <b>Cable Stripping Tool</b> |
|-----------------------------|

<https://www.escha.net/en/products/standard/accessories-for-connectivity/8066216>