



Field-wireable, M12, male, angled, 3+PE, screw-/clamp contact

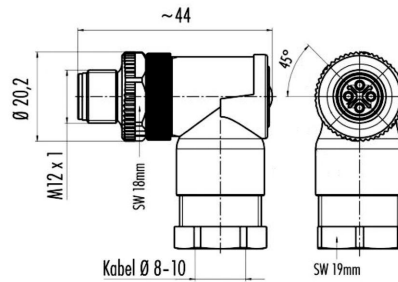

Product data

Item description	PS-WWASC4K
Item-No.	8070341
Customs tariff-No.	85366990
EAN	4047106157937

Technical data

Connector	male, angled, M12
Number of pins	3+PE
Coding	S
Rated voltage	630V
Current load per pin (at 40°C)	12A
Insulation resistance	$\geq 10^9 \Omega$
Resistance	$\leq 3 m\Omega$
Ambient temperature product	-40°C...+85°C
Contact material	Metal, CuZn, gold-plated
Contact-carrier material	Plastic, PA, BK
Grip body material	Plastic, PA, BK
Connecting cross-section	1.50 mm ²
Cable outlet	8...10 mm
Connecting type	Screw-/clamp contact
Standards	IEC 61076-2-111
Degree of protection (mounted)	IP67
Mechanical life-cycle	>100 mating cycles
Degree of pollution	3
Style	angled