



## M8, female, angled, 4 poles, with LED, sensor-/actuator cable

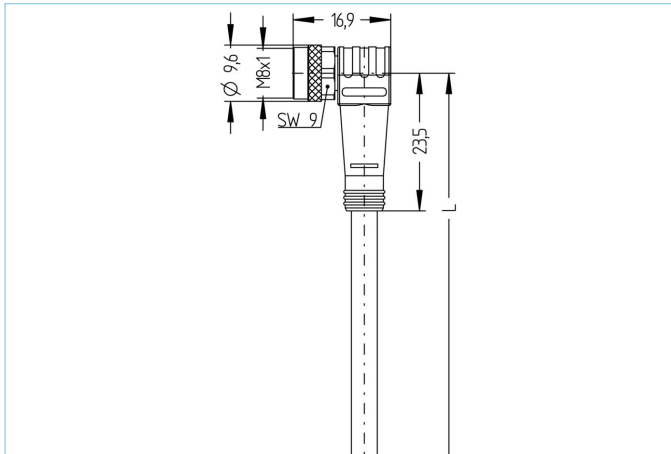

### Product data

|                    |                   |
|--------------------|-------------------|
| Item description   | AL-SWKP4P2-3/S370 |
| Item-No.           | 8109674           |
| Length             | 3m                |
| Customs tariff-No. | 85444290          |
| Step-File          | AL-SWKP4P2.stp    |
| EAN                | 4047106303679     |

### Technical data

|                                |                              |
|--------------------------------|------------------------------|
| Connector                      | female, angled, M8, with LED |
| Number of pins                 | 4                            |
| Pin assignment                 | 1 BN, 2 WH, 3 BU, 4 BK       |
| Rated voltage                  | 30V                          |
| Current load per pin (at 40°C) | 3A                           |
| Insulation resistance          | $\geq 10^9 \Omega$           |
| Resistance                     | $\leq 5 m\Omega$             |
| Ambient temperature product    | -30°C...+90°C                |
| Circuit logic                  | pnP                          |
| Signal status-indicator        | LED YE                       |
| Operating voltage-indicator    | LED GN                       |
| Contact material               | Metal, CuZn, gold-plated     |
| Contact-carrier material       | Plastic, TPU, BK             |
| Grip body material             | Plastic, TPU, transparent    |
| Coupling nut material          | Metal, CuZn, nickel-plated   |
| Sealing (female) material      | FPM/FKM                      |

|                                |                    |
|--------------------------------|--------------------|
| Standards                      | IEC 61076-2-104    |
| Degree of protection (mounted) | IP65, IP67, IP68   |
| Mechanical life-cycle          | >100 mating cycles |
| Cable end assembly             | open cable end     |
| Degree of pollution            | 3/2                |
| Style                          | angled             |

|                  |                     |
|------------------|---------------------|
| <b>Cable web</b> | <b>PVC, P00, GY</b> |
|------------------|---------------------|

PVC-cable for measurement and control-, and sensor technology. Suitable for applications in dry areas on packaging machines, assembly- and conveyor technology. High flexibility with unstressed movement (conditional drag-chain application possible). Predestined for applications in food- and beverage industry.

|                              |                                                                                                                                                                  |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Outer diameter of jacket     | 4.20 mm                                                                                                                                                          |
| Cable-jacket material        | PVC                                                                                                                                                              |
| Jacket color                 | GY, similar RAL7040                                                                                                                                              |
| Wire cross-section           | 4 x 0.25 mm <sup>2</sup>                                                                                                                                         |
| Wire insulation material     | PVC                                                                                                                                                              |
| Wire colors                  | BN, WH, BU, BK                                                                                                                                                   |
| Wire structure               | 14 x 0.15 mm                                                                                                                                                     |
| Bending radius (fixed)       | 5 x Ø-cable                                                                                                                                                      |
| Bending radius (repeated)    | 10 x Ø-cable                                                                                                                                                     |
| Temperature range (repeated) | 0°C...+80°C                                                                                                                                                      |
| Temperature range (fixed)    | -25°C...+80°C                                                                                                                                                    |
| Rated voltage cable          | ≤300 V                                                                                                                                                           |
| Special features             | good resistance against oils and chemicals, LABS free, ozone resistant, recyclable, RoHs compliant, acid- and alkali resistant, seawater resistant, UV resistant |

|                       |          |
|-----------------------|----------|
| <b>Classification</b> |          |
| eCl@ss 6.0            | 27279218 |
| eCl@ss 7.0            | 27279218 |
| eCl@ss 8.0            | 27279218 |
| eCl@ss 9.0            | 27060311 |
| ETIM 5.0              | EC001855 |
| ETIM 6.0              | EC001855 |

|                                                                                                                                                                                                                                                    |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <b>Accessories</b>                                                                                                                                                                                                                                 |  |
| Mounting-clip, M8<br><a href="https://www.escha.net/en/products/standard/accessories-for-connectivity/8047658">https://www.escha.net/en/products/standard/accessories-for-connectivity/8047658</a>                                                 |  |
| Torque-wrench set<br><a href="https://www.escha.net/en/products/standard/accessories-for-connectivity/8055431">https://www.escha.net/en/products/standard/accessories-for-connectivity/8055431</a>                                                 |  |
| Marking rings Ø 9mm<br><a href="https://www.escha.net/en/products/standard/accessories-for-connectivity?p=1&amp;o=3&amp;n=15&amp;f=809">https://www.escha.net/en/products/standard/accessories-for-connectivity?p=1&amp;o=3&amp;n=15&amp;f=809</a> |  |
| Screw plug, M8<br><a href="https://www.escha.net/en/products/standard/accessories-for-connectivity/8081771">https://www.escha.net/en/products/standard/accessories-for-connectivity/8081771</a>                                                    |  |
| Cable Stripping Tool<br><a href="https://www.escha.net/en/products/standard/accessories-for-connectivity/8066215">https://www.escha.net/en/products/standard/accessories-for-connectivity/8066215</a>                                              |  |
| Cable Stripping Tool<br><a href="https://www.escha.net/en/products/standard/accessories-for-connectivity/8066216">https://www.escha.net/en/products/standard/accessories-for-connectivity/8066216</a>                                              |  |