
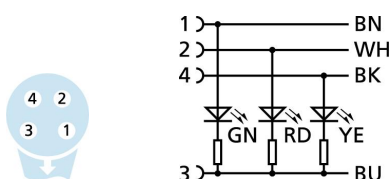
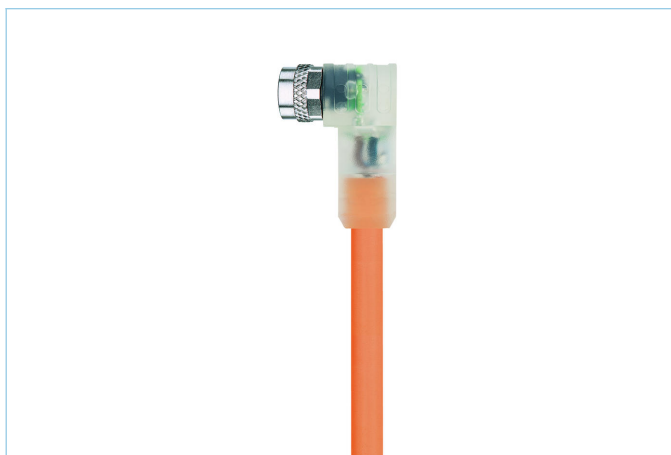


## M8, female, angled, 4 poles, with LED, sensor-/actuator cable

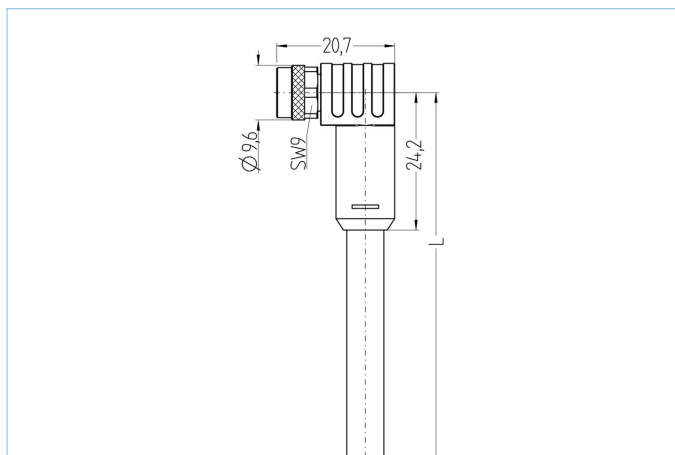

### Product data

|                    |                           |
|--------------------|---------------------------|
| Item description   | AL-SWKP4P3.1-7,5/S740/S77 |
| Item-No.           | 8119805                   |
| Length             | 7.5m                      |
| Customs tariff-No. | 85444290                  |
| EAN                | 4047106333034             |

### Technical data

|                                |                              |
|--------------------------------|------------------------------|
| Connector                      | female, angled, M8, with LED |
| Number of pins                 | 4                            |
| Pin assignment                 | 1 BN, 2 WH, 3 BU, 4 BK       |
| Rated voltage                  | 30V                          |
| Current load per pin (at 40°C) | 3A                           |
| Insulation resistance          | $\geq 10^9 \Omega$           |
| Resistance                     | $\leq 5 m\Omega$             |
| Ambient temperature product    | -30°C...+90°C                |
| Circuit logic                  | pnp                          |
| Signal status-indicator        | LED YE/RD                    |
| Operating voltage-indicator    | LED GN                       |
| Contact material               | Metal, CuZn, gold-plated     |
| Contact-carrier material       | Plastic, TPU, BK             |
| Grip body material             | Plastic, TPU, BK             |
| Coupling nut material          | Metal, CuZn, nickel-plated   |
| Sealing (female) material      | FPM/FKM                      |
| Standards                      | IEC 61076-2-104              |
| Degree of protection (mounted) | IP65, IP67, IP68             |
| Mechanical life-cycle          | >100 mating cycles           |
| Cable end assembly             | open cable end               |
| Degree of pollution            | 3/2                          |
| Style                          | angled                       |

## Cable web

PUR, UL, S740, welding sparks resistant, Automotive

Flexible, silicone- and halogen free control cable with high mechanical strength. Due to its outstanding properties in drag-chain adaption, torsionresistance and weld-field immunity, it is very well suited for the flexible applications in robotics, handling- and assembly technology as well as machine tools. The cable meets the UL and CSA (UL10493/20549; cULus) requirements.

|                                |                                                                                                                                                                                                                                                                      |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Outer diameter of jacket       | 6.6 mm                                                                                                                                                                                                                                                               |
| Cable-jacket material          | PUR                                                                                                                                                                                                                                                                  |
| Jacket color                   | OG, similar RAL2003                                                                                                                                                                                                                                                  |
| Wire cross-section             | 4 x 0.34 mm <sup>2</sup>                                                                                                                                                                                                                                             |
| Wire insulation material       | PP                                                                                                                                                                                                                                                                   |
| Wire colors                    | BN, WH, BU, BK                                                                                                                                                                                                                                                       |
| Wire structure                 | 42 x 0.10 mm                                                                                                                                                                                                                                                         |
| Bending radius (fixed)         | 5 x Ø-cable                                                                                                                                                                                                                                                          |
| Bending radius (repeated)      | 10 x Ø-cable                                                                                                                                                                                                                                                         |
| Temperature range (repeated)   | -30°C...+90°C                                                                                                                                                                                                                                                        |
| Temperature range (fixed)      | -40°C...+90°C                                                                                                                                                                                                                                                        |
| Temperature range (drag chain) | -25°C...+60°C                                                                                                                                                                                                                                                        |
| Drag chain-application         | 5 Mio. cycles                                                                                                                                                                                                                                                        |
| Halogen-free                   | Yes                                                                                                                                                                                                                                                                  |
| Torsion                        | +/-360°/m, ≥ 2 Mio. cycles                                                                                                                                                                                                                                           |
| Rated voltage cable            | ≤300 V                                                                                                                                                                                                                                                               |
| Special features               | flame retardant, halogen free, hydrolysis proof, LABS free, oil resistant, ozone resistant, recyclable, RoHs compliant, acid- and alkali resistant, drag chain-adapted, welding sparks resistant, seawater resistant, silicone free, torsion resistant, UV resistant |
| Eigenschaften Automotiv        | The cable meets the requirements of MgU-I-B09-41 for sensor-/ actuator cables for the body shop area.                                                                                                                                                                |

## Classification

|            |          |
|------------|----------|
| eCl@ss 6.0 | 27279218 |
| eCl@ss 7.0 | 27279218 |
| eCl@ss 8.0 | 27279218 |
| eCl@ss 9.0 | 27060311 |
| ETIM 5.0   | EC001855 |
| ETIM 6.0   | EC001855 |

## Accessories

Mounting-clip, M8

<https://www.escha.net/en/products/standard/accessories-for-connectivity/8047658>

Torque-wrench set

<https://www.escha.net/en/products/standard/accessories-for-connectivity/8055431>

Marking rings Ø 9mm

<https://www.escha.net/en/products/standard/accessories-for-connectivity?p=1&o=3&n=15&f=809>

Screw plug, M8

<https://www.escha.net/en/products/standard/accessories-for-connectivity/8081771>

Cable Stripping Tool

<https://www.escha.net/en/products/standard/accessories-for-connectivity/8066215>

Cable Stripping Tool

<https://www.escha.net/en/products/standard/accessories-for-connectivity/8066216>