



Receptacle, M12, Push-Pull inner locking, female, straight, 8 poles, X-coded, back wall-mounting, print contact, shielded, Industrial Ethernet



PROFI[®]
NET

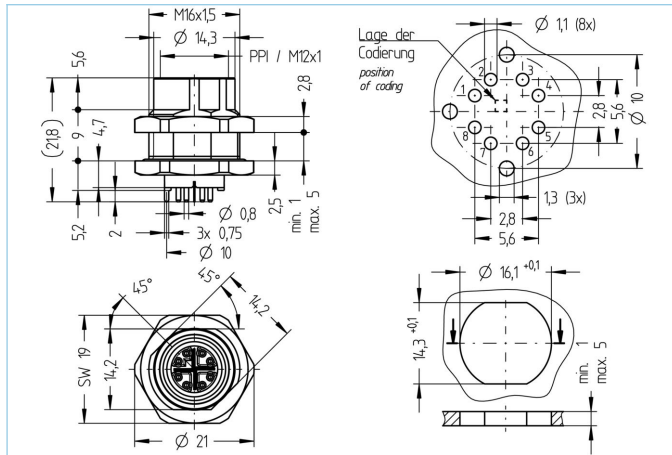

Product data

Item description	IE-PPIFHM12KSX8-P/M16
Item-No.	8120446
Customs tariff-No.	85366990
Packaging unit	10
Step-File	IE-PPIFHM12KSX8-P_M16.stp
EAN	4047106340810

Technical data

Connector	female, straight, M12
Number of pins	8
Coding	X
Rated voltage	50V _{AC} 60V _{DC}
Current load per pin (at 40°C)	0.5A
Insulation resistance	≥10 ⁹ Ω
Transmission features	Cat6A
Ambient temperature product	-30°C...+90°C
Contact material	Metal, CuZn, gold-plated
Contact-carrier material	Plastic, PA, GN
Receptacle housing material	Metal, CuZn, nickel-plated
Sealing (female) material	FPM/FKM
Material of external sealing	FPM/FKM
Shielding	with shielding
Mounting direction	Back wall-mounting (incl. Fixing screw)
Wrench size of fastening nut	A/F19
Fastening thread	M16x1.5
Wall thickness area fixing nut	1,0...5,0 mm

Connecting type	Print contact
Standards	IEC 61076-2-010
Degree of protection (mounted)	IP65, IP67, IP68
Mechanical life-cycle	>100 mating cycles
Degree of pollution	2
Style	straight
Tightening torque housing/flange	2,0 Nm
Classification	
eCl@ss 6.0	27279220
eCl@ss 7.0	27440103
eCl@ss 8.0	27440103
eCl@ss 9.0	27440103
ETIM 5.0	EC002061
ETIM 6.0	EC002061

Link to product

<https://www.escha.net/en/8120446>