



# M12, Push-Pull inner locking, male, angled, 4 poles, D-coded, shielded, rail approved

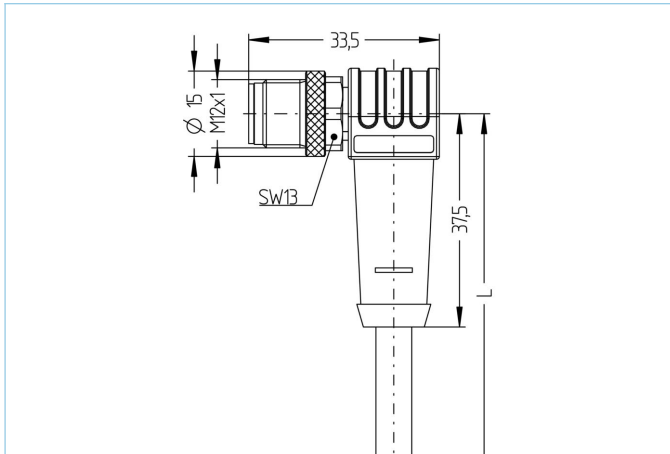

## Product data

|                    |                           |
|--------------------|---------------------------|
| Item description   | RA-PPIWWASSY4.029-5/S4002 |
| Item-No.           | 8122930                   |
| Length             | 5m                        |
| Customs tariff-No. | 85444290                  |
| Step-File          | RA-PPIWWASSY4.stp         |
| EAN                | 4047106343880             |

## Technical data

|                                |                             |
|--------------------------------|-----------------------------|
| Connector                      | male, angled, M12 Push-Pull |
| Number of pins                 | 4                           |
| Pin assignment                 | 1 YE, 2 WH, 3 OG, 4 BU      |
| Coding                         | D                           |
| Rated voltage                  | 60V DC                      |
| Current load per pin (at 40°C) | 4A                          |
| Insulation resistance          | $\geq 10^9 \Omega$          |
| Resistance                     | $\leq 5m\Omega$             |
| Transmission features          | Cat5e                       |
| Contact material               | Metal, CuZn, gold-plated    |
| Contact-carrier material       | Plastic, PA, BK             |
| Grip body material             | Plastic, TPU, BK            |
| Material of shielding housing  | Zinc die-cast               |
| Shielding                      | with shielding              |
| Standards                      | IEC 61076-2-010             |
| Mechanical life-cycle          | >100 mating cycles          |
| Cable end assembly             | open cable end              |
| Degree of pollution            | 3                           |
| Style                          | angled                      |

#### Advanced technical data rail approved

|                                |                                            |
|--------------------------------|--------------------------------------------|
| Standards                      | DIN EN 50155, DIN EN 45545-2               |
| Shock & vibration              | Class 1, Category B (DIN EN 61373)         |
| Degree of protection (mounted) | IP67 (-30°C...+90°C), IP65 (-40°C...+90°C) |
| Temperature range              | Tx (-40°C...+90°C)                         |
| Fire prevention according to   | DIN EN 45545-2 HL1-3                       |

#### Cable web

**Cat5, RADOX®, RW, 1x4xAWG22, S4002**

Halogen-free, electron-beam cross-linked Cat5-cable with improved fire performance. This cable can be used for fixed and protected installation inside of rail vehicles and busses and fulfills the requirements according to EN 45545-2 (HL1 - HL3). It is optimally suited for all Ethernet applications of class D (ECN) according to IEEE 802.3. For installation the guidelines of EN 50355 and EN 50343 must be considered. Due to its thin diameter, this cable is predestined for applications in which overmolded RJ45-connectors are used. RADOX® is a registered trademark of HUBER+SUHNER AG, Switzerland. RADOX® is a registered trademark of HUBER+SUHNER AG, Switzerland.

|                              |                                                                                                                                                       |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Outer diameter of jacket     | 6.60 mm                                                                                                                                               |
| Cable-jacket material        | RADOX® EM 104                                                                                                                                         |
| Jacket color                 | BK                                                                                                                                                    |
| Wire cross-section           | 1 x 4 x AWG22, star quad                                                                                                                              |
| Wire insulation material     | RADOX® FOAM                                                                                                                                           |
| Wire colors                  | WH, BU, OG, YE                                                                                                                                        |
| Bending radius (fixed)       | 6xØ cable                                                                                                                                             |
| Temperature range (fixed)    | -50°C...+90°C                                                                                                                                         |
| Fire prevention according to | DIN EN 45545-2 HL1-3, DIN 5510 fire prevention-levels 1-4, NF F16-101 category A1, A2, B, UNI CEI 11170, danger level LR1-LR4, NFPA 130, UN ECE R 118 |
| Shielding                    | Yes                                                                                                                                                   |
| Halogen-free                 | Yes                                                                                                                                                   |
| Transmission features        | Cat5e                                                                                                                                                 |
| Special features             | increased thermal load, flame retardant, low emission of smoke, halogen free, oil- and fuel resistant, RoHs compliant                                 |

#### Classification

|            |          |
|------------|----------|
| eCl@ss 6.0 | 27060307 |
| eCl@ss 7.0 | 27060307 |
| eCl@ss 8.0 | 27060307 |
| eCl@ss 9.0 | 27060307 |
| ETIM 5.0   | EC000830 |
| ETIM 6.0   | EC000830 |

#### Accessories

Cable Stripping Tool  
<https://www.escha.net/en/products/standard/accessories-for-connectivity/8066215>

Cable Stripping Tool  
<https://www.escha.net/en/products/standard/accessories-for-connectivity/8066216>

Marking rings Ø 9mm  
<https://www.escha.net/en/products/standard/accessories-for-connectivity?p=1&o=3&n=15&f=809>