



M12 male, fieldwireable

4D: 8098126 | 4A: 8098127

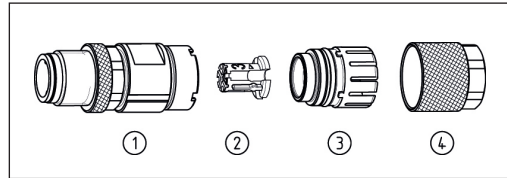

| 01 | | | |
|----------|-------------|-------------|-------------|
| ∅ [mm] | ∅ 4.5 – 5.5 | ∅ 5.2 – 7.0 | ∅ 6.8 – 8.0 |
| 10 pcs. | 8098132 | 8098134 | 8098136 |
| 100 pcs. | 8098133 | 8098135 | 8098137 |

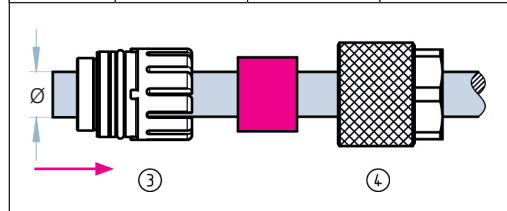

ESCHA GmbH & Co. KG | Elberfelder Str. 32 | 58553 Halver/Germany
8098138 | 05.2020

| 02 | a | b | c |
|-------------------|-------|----------|-------|
| [mm] | 16 ±1 | 4.5 ±0.5 | 14 ±1 |
| unshielded | | | |
| | | | |
| shielded | | | |
| | | | |

| 03 | | |
|------------------------------|--|--|
| ∅ | 0.25 – 0.5mm ² AWG 24 – AWG 20 | 0.75 – 1.0mm ² AWG 18 – AWG 16 |
| 25 pcs. | 8098128 | 8098130 |
| 100 pcs. | 8098129 | 8098131 |
| Crimp Tool | digital 8098141 analogue 8098140 | |
| Locator | 8098142 | |
| Position | 1 | |
| Crimp Tool Setting Dimension | AWG 24=0.60mm | AWG 18=0.85mm |
| | AWG 22=0.65mm | AWG 16=0.95mm |
| | AWG 20=0.75mm | AWG 20=0.75mm |
| | | |

